


SMT Jumper Link

- ❖ Designed to link PCB tracks where through hole links are not possible.
- ❖ Typical applications include use on aluminium backplanes in power applications.
- ❖ High current.
- ❖ Small footprint.
- ❖ Low profile options available for space saving design.

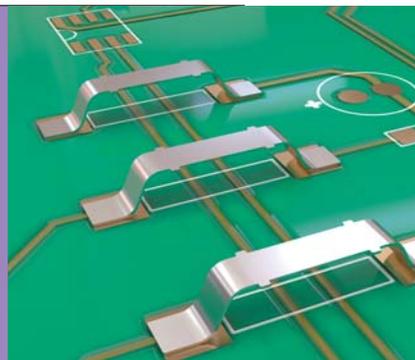

SPECIFICATION


Materials

Material: Copper Alloy (S1621, S1911)
Copper (S1731)
Finish: See Order Code


Packaging

Packaging Format: Tape & Reel or Loose
Reel quantity: S1621: 5,000 on a Ø330mm reel
S1731: 2,500 on a Ø330mm reel
S1911: 4,000 on a Ø330mm reel


12.3mm LONG

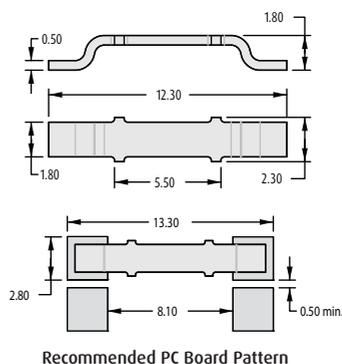

6.86mm LONG, 2.54mm HIGH

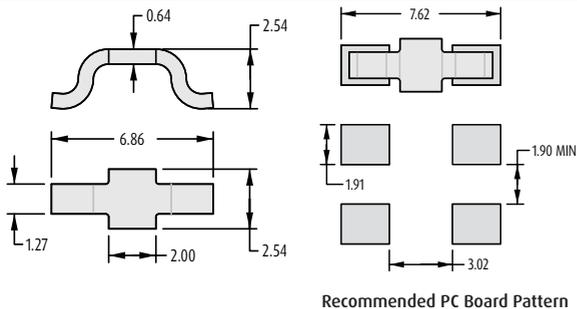

6.85mm LONG, 0.97mm HIGH

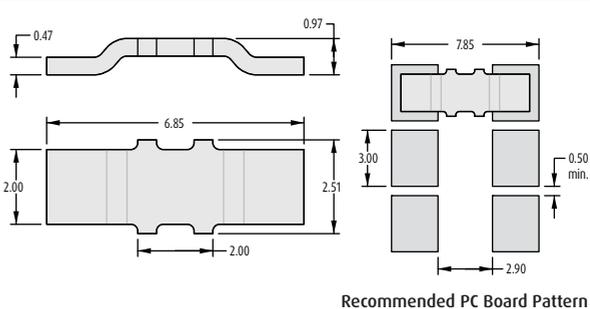

HOW TO ORDER

SERIES CODE

TYPE

62	12.3mm long
73	6.86mm long, 2.54 high
91	6.85mm long, 0.97 high

S1 XX 1 - XX R

PACKAGING

R	Tape & Reeled
Blank	Loose

FINISH

06	Tin/Lead	
46	Tin	

All dimensions in mm.

www.harwin.com

