

FK-MC 0,5/ 7-ST-2,5 BK

Order No.: 1908114

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1908114>Plug component, Nominal current: 4 A, Rated voltage (III/2): 160 V,
Number of positions: 7, Pitch: 2.5 mm, Color: black**Commercial data**

GTIN (EAN)	4017918446062
sales group	E161
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.004574 KG

Product notesWEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Certificates / Approvals

Certification

CB, CUL, UL, VDE-PZI

CUL

Nominal voltage U_N	125 V
Nominal current I_N	4 A
AWG/kcmil	28-20

UL

Nominal voltage U_N	125 V
Nominal current I_N	4 A
AWG/kcmil	28-20

Accessories



Item	Designation	Description
Marking		
0804853	SK 2,54/2,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 140 terminal blocks

Tools

1205202	SZS 0,4X2,0	Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap
---------	-------------	--

Diagrams/Drawings

Diagram

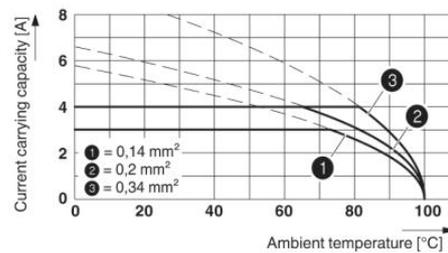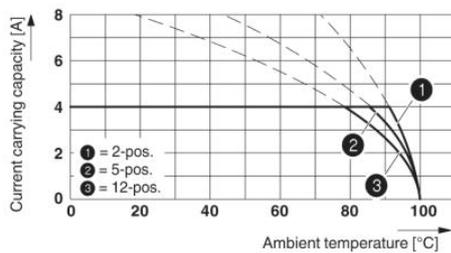

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;