


► General data

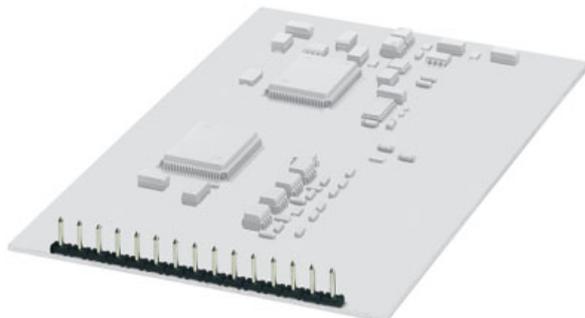

Male connector, 5.0 mm pitch, for use with compact printed circuit terminal CPT 1/...-ST-5.0, color: Black

Order number	1933228
Type	PST 1,3/ 6-5,0

Barcode number	4017918918712
Unit pack	50 Pcs.
Customs tariff	85369010000

► Technical data

Dimensions / positions


Pitch	5 mm
Dimension a	25 mm
Number of positions	6
Pin dimensions	1,3 mm
Hole diameter	1.5 mm

Technical data


Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Maximum load current	10 A (Depends on the plug used)
Insulating material	PA
Inflammability class acc. to UL 94	V0

▸ Drawings

Drilling diagram



Dimensioned drawing



► Documentation

Data Sheet

5127331_0.0.pdf

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel + 49 - (0) 52 35 - 3-00
Fax + 49 - (0) 52 35 - 3-4 12 00
www.phoenixcontact.com

© Phoenix Contact
Technical modifications reserved