


コネクタ実装側 (CONNECTOR MOUNT SIDE) 推奨基板寸法  
 逆側 (REVERSE SIDE) RECOMMENDED P.C.B. PATTERN LAYOUT

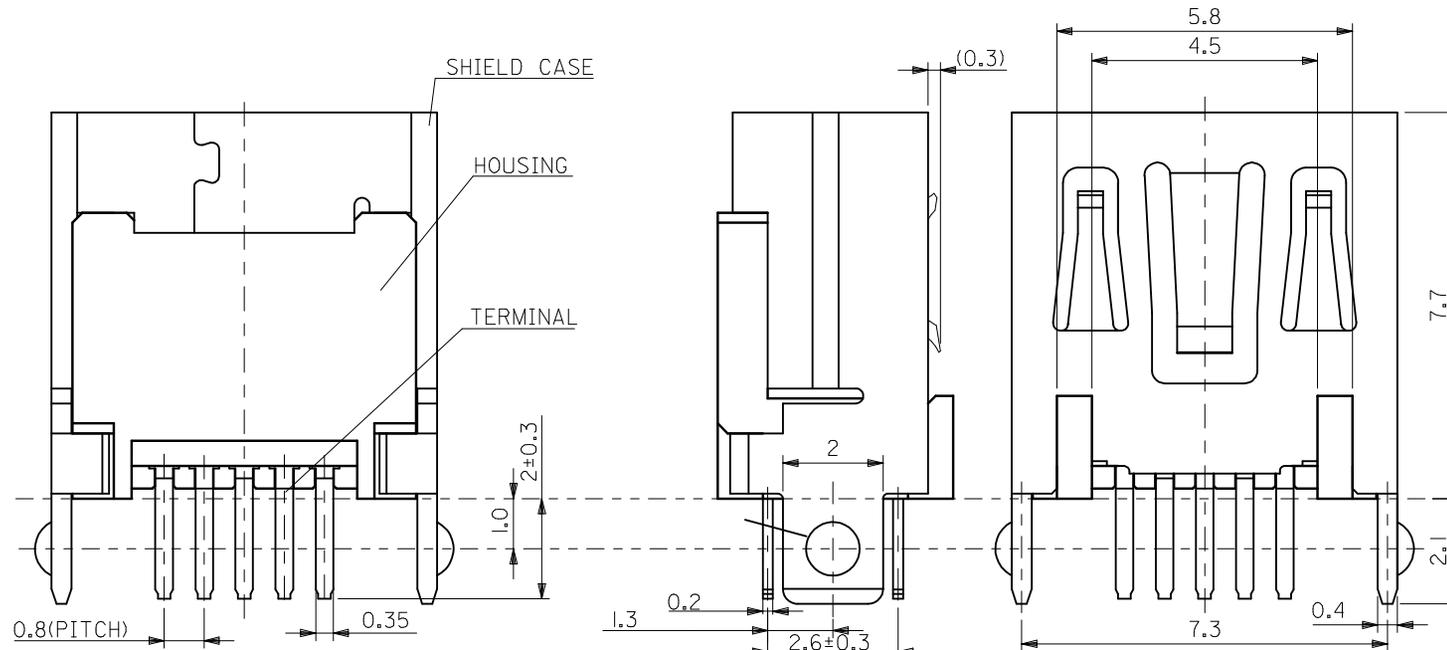

- 注記 NOTES
- 材質 MATERIAL  
 ハウジング: ポリアミド, 黒色 UL94V-0  
 HOUSING: POLYAMIDE, BLACK UL94V-0  
 ターミナル: 銅合金 (t=0.2)  
 TERMINAL: COPPER ALLOY (t=0.2)  
 シールド ケース: 銅合金 (t=0.4)  
 SHIELD CASE: COPPER ALLOY (t=0.4)
  - メッキ仕様 PLATING  
 ターミナル TERMINAL  
 接点部: 金メッキ CONTACT AREA: GOLD  
 半田付け部: 錫銅メッキ SOLDER TAIL AREA: TIN-COPPER  
 下地部: ニッケルメッキ UNDER PLATING: NICKEL  
 シールド ケース: 錫銅メッキ SHIELD CASE: TIN-COPPER  
 下地部: ニッケルメッキ UNDER PLATING: NICKEL

500075-0519  
 TRAY PACKAGE  
 ORDER No.

REVISED EC NO: J2009-1533 DRW: NESATO 2009/06/25 CHKD: MATSUMOTO 2009/06/25 APPR: NUKITA 2009/06/25	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			MM ONLY	10:1	METRIC	
	DESCRIPTION	10 UNDER	±0.2	DRAWN BY	DATE	TITLE
		10 OVER 30 UNDER	±0.25	K. TAKAHASHI	2002/06/20	MINI-B STRAIGHT TYPE 2 REC. ASS'Y
	30 OVER	±0.3	CHECKED BY	DATE		
			M. SASAO	2002/06/20		
	ANGULAR	±3 °	APPROVED BY	DATE		
	DRAFT WHERE APPLICABLE		M. SASAO	2002/06/20		
	MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.	DOCUMENT NO.		
			SEE TABLE			
			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			A3			