

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

54819-0519

Status:


Active

Overview:

USB OTG (On-The-Go)

Description:

USB On-The-Go (OTG) Mini-B Receptacle, Right Angle, Through Hole Solder Tails and Shell Tabs, Lead-Free

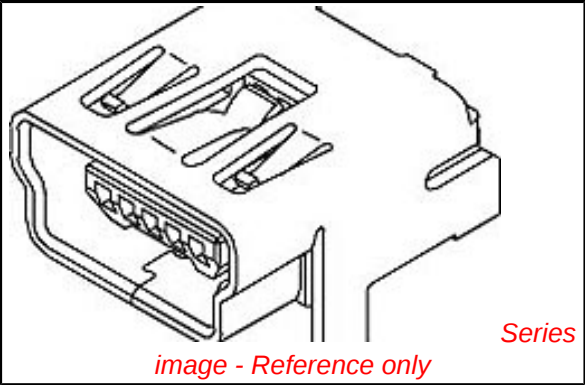

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-56579-015 \(PDF\)](#)

[Packaging Specification SPK-54819-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
UL	E29179
General	
Product Family	I/O Connectors
Series	54819
Application	Wire-to-Board
Component Type	Receptacle
MolexKits	Yes
Overview	USB OTG (On-The-Go)
Product Name	USB OTG (On-The-Go)
Type	Mini-B
UPC	822348124435
Physical	
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
Flammability	94V-0
Gender	Receptacle
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.500/g
Orientation	Right Angle
PC Tail Length	1.80mm
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	1.016µm
Polarized to Mating Part	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-20°C to +85°C
Termination Interface: Style	Through Hole
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1A
Shielded	Yes
Voltage - Maximum	30V

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Not Low-Halogen

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

54819Series

Mates With

592049401 , 592053301

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Packaging Specification	SPK-54819-001
Product Specification	PS-56579-015, RPS-54819-017, RPS-54819-030, RPS-54819-032, RPS-54819-033, RPS-56579-003, RPS-56579-004, RPS-56579-007, RPS-56579-008, RPS-56579-009, RPS-56579-010
Sales Drawing	SD-54819-026

This document was generated on 11/05/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION