



DIMENSIONS

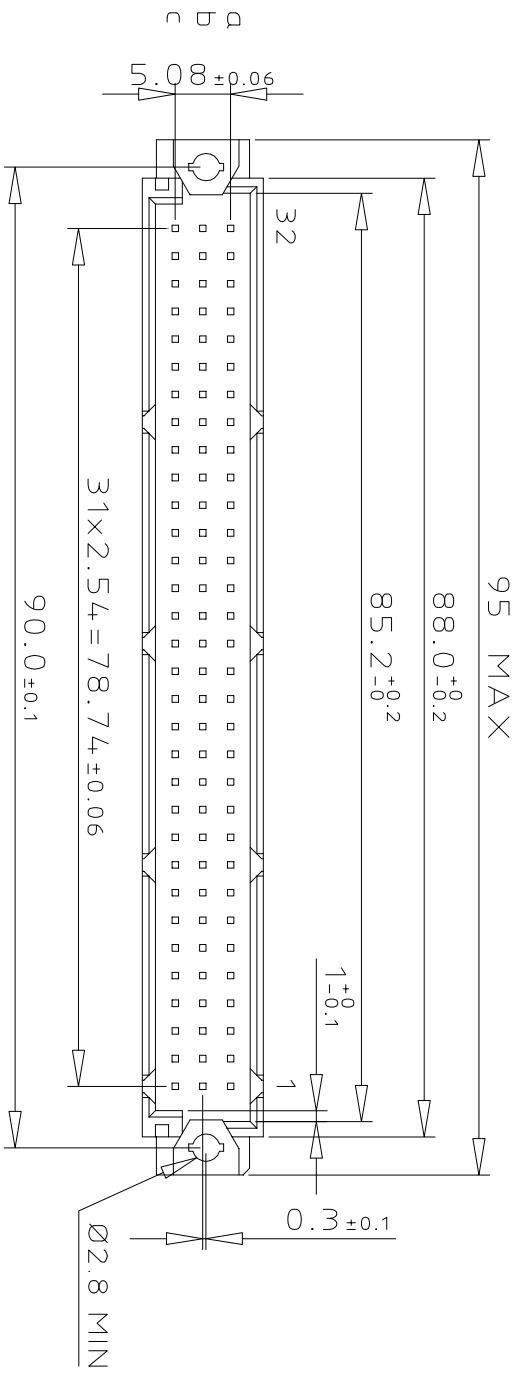


TERMINATION

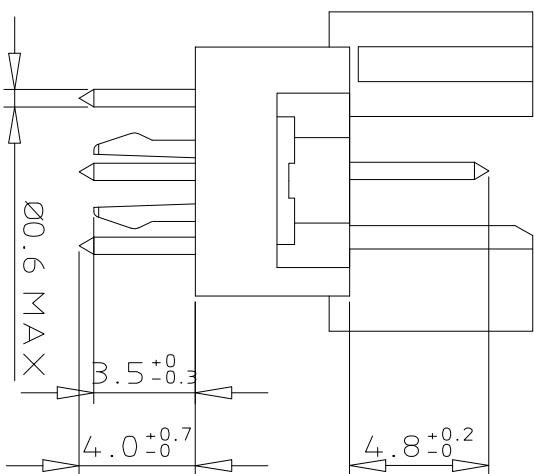


ORDERING INFORMATION

SERIES	8609	3	96	7	8	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
Row a	b	c								96
Row a - c										64
NO. OF CONTACTS										
TYPE OF INSULATOR										7
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										7
REVERSE MOUNTING - STYLE R										8
TERMINATION										14
STRAIGHT SPILL										
OPTIONS										
NO. OPTION WITH HARPOONS										7
PERFORMANCE CLASS										
DIN 41612 CLASS 3										4
DIN 41612 CLASS 2										5
DIN 41612 CLASS 1										6
AS PER MIL C 55302 / JSS 50808										8
PITCH PER ROW										
254 mm										5
LEAD FREE VERSION										ELF

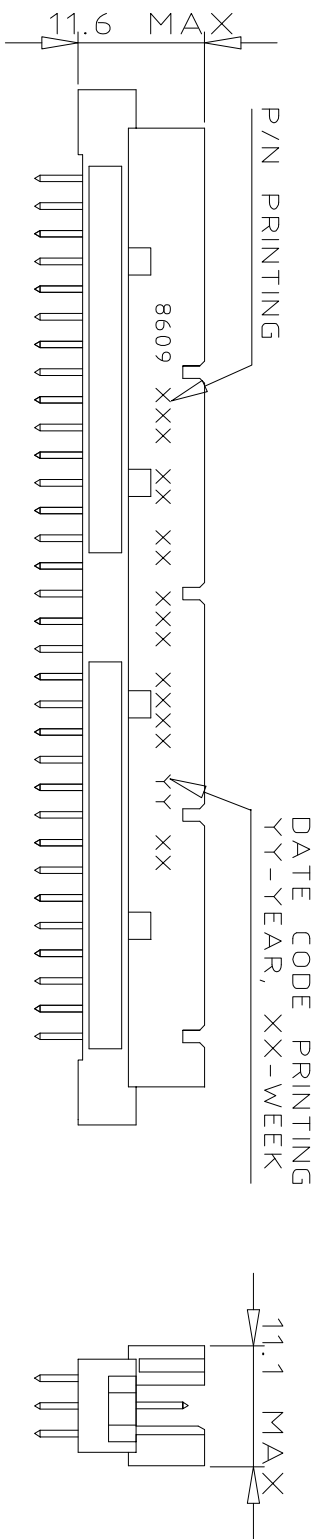

PCB LAYOUT

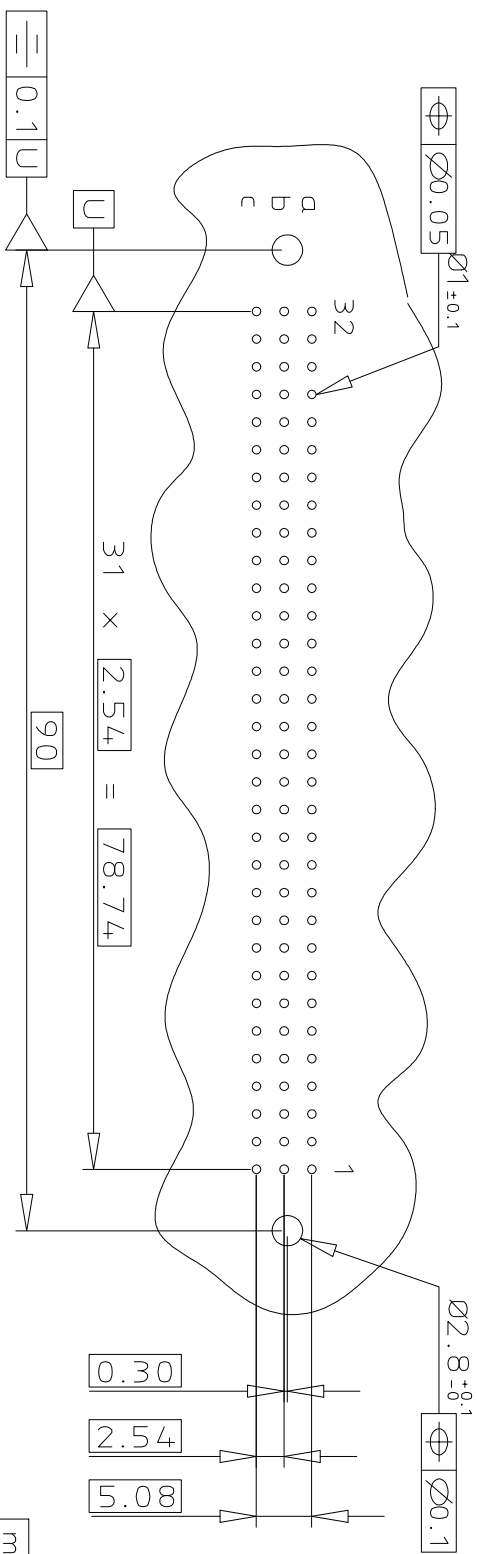

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302	tolerance	ISO 406 ISO 1101	projection	mm	product family	8609
tr	ecn no	dr	ddte	tolerances unless otherwise specified	0.X	±0.1		title	DIN REVERSE HEADER
A	104-0063	MINI	2004-09-17	angles	0.XX	±0.1		DIN 41612 STYLE R	
B	105-0089	MINI	2005-05-19	linear	0.XXX	±0.1	scale 3:2		
C	105-0174	MINI	2005-09-27	0*2°					
D	106-0061	MINI	2006-05-31	dr				dwg no	sheet 1 of 1 size
E	108-0142	KR	2008-10-17	engr	RAKHEE G	2004-09-17		C-8609-2004	A3
F	108-0146	KR	2008-10-21	chr	KESAVAN R	2008-10-21		type Product	Customer Drawing
sheet index	revision			pppd	KESAVAN R	2008-10-21			

