
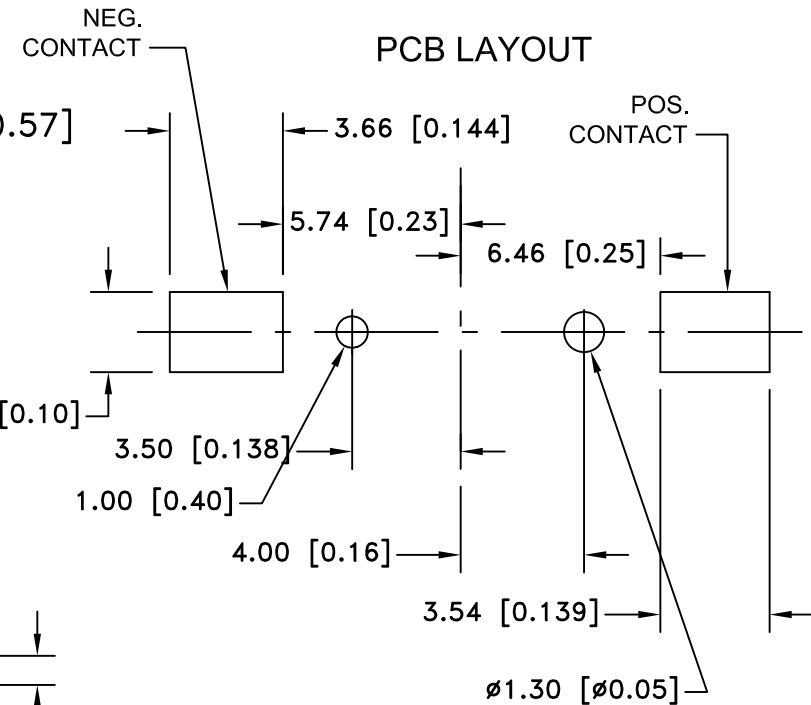


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/16/10	D	ADDED CENTER DIST. 7.50 ADDED DIM. Ø0.90 ADDED DIM. Ø1.20	T.B.	B.S.	
01/11/13	E	ADDED UL File # E109088	T.B.	B.S.	
11/07/14	F	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
12/02/16	G	REVISED POSITIVE CONTACT DIM. 17.83 WAS 18.54	T.B.	B.S.	

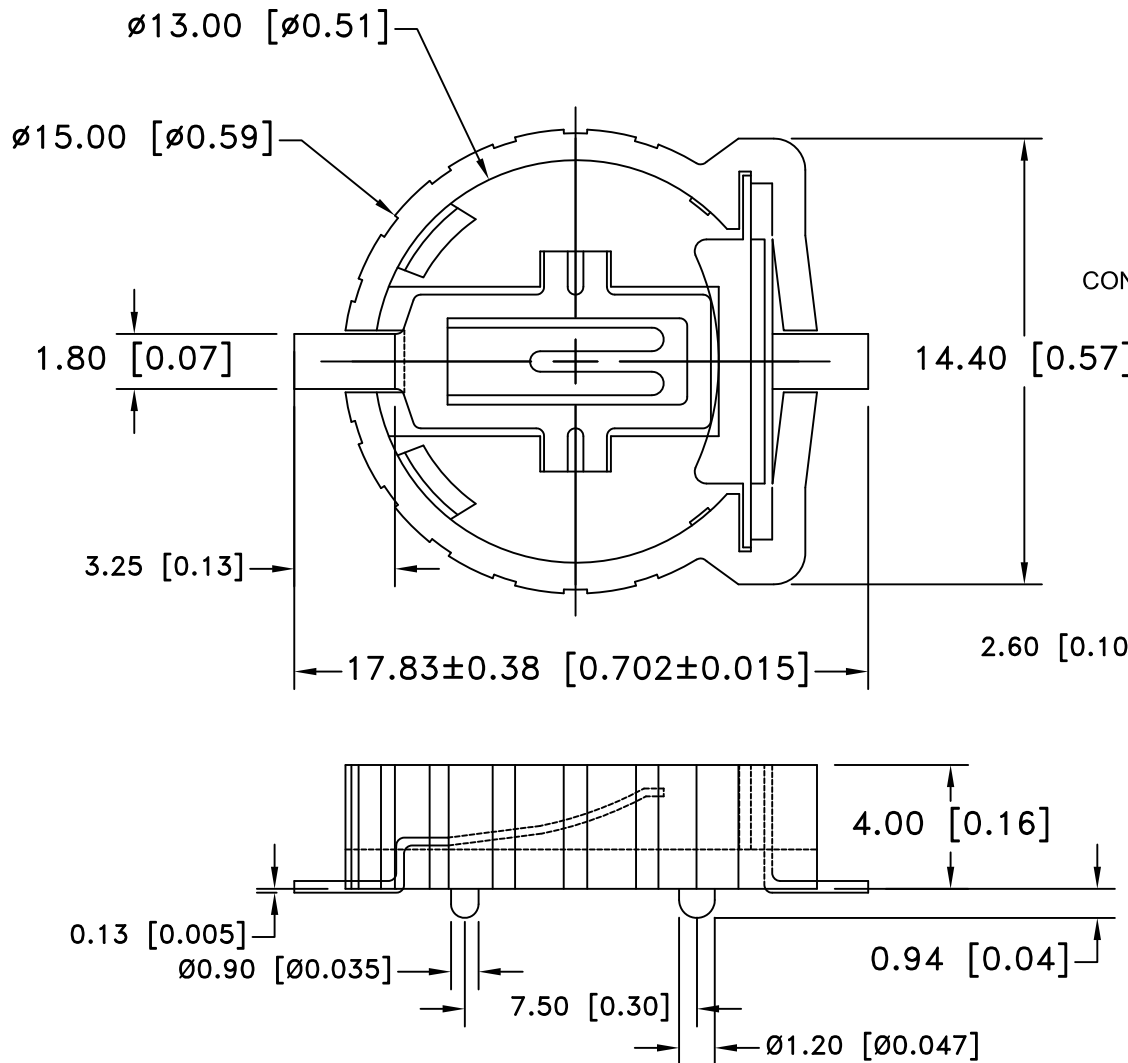

NOTES:

- MATERIAL:
HOUSING: GLASS FILLED PPS, UL94V-0, BROWN, UL FILE#E109088
TERMINAL: 0.20mm [0.008] PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL
- INSULATION RESISTANCE: 1000M Ω MIN
- CONTACT RESISTANCE: 20M Ω MAX.
- DIELECTRIC WITHSTANDING: AC 500V
- OPERATING TEMPERATURE: -40°C TO +85°C
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.25 (.010)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title COIN CELL HOLDER FOR CR1220		
Angular + 2° - 1°	Date 12/02/16	Drawing Number BC501SM	