




Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

BC847BS

Features

- Ideally Suited for Automatic Insertion
- Ultra-Small Surface Mount Package
- For Switching and AF Amplifier Applications
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking:1C



Dual NPN Small Signal Transistor 300mW


Mechanical Data

- Case: SOT-363, Molded Plastic
- Polarity: See Diagram

Maximum Ratings @ 25°C Unless Otherwise Specified

Symbol	Parameter	Value	Units
OFF CHARACTERISTICS			
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	45	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	50	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage	6.0	Vdc
I_C	Collector Current	100	mAdc
I_{CM}	Peak Collector Current	200	mAdc
P_d	Power Dissipation @ $T_A=25^\circ\text{C}$	300	mW
T_J, T_{STG}	Operating & Storage Temperature	-55~+150	°C

SOT-363

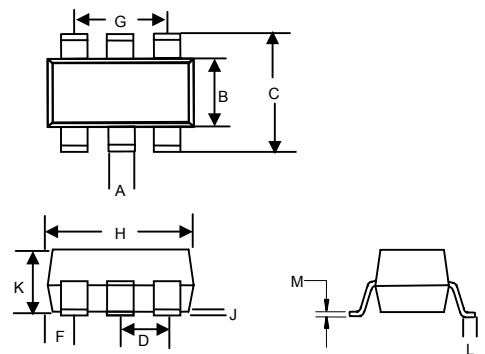

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.004	.012	0.10	0.30	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026		0.65Nominal		
F	.012	.016	0.30	0.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.039	0.90	1.00	
L	.010	.016	0.25	0.40	
M	.004	.016	0.10	0.25	

BC847BS



Micro Commercial Components TM







Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units	Test Condition
OFF CHARACTERISTICS						
η_{FE}	DC Current Gain	110	---	630	---	$V_{CE}=5.0V, I_C=2.0mA$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	---	---	250 650	mV	$I_C=10mA, I_B=0.5mA$ $I_C=100mA, I_B=5.0mA$
$V_{BE(ON)}$	Base-Emitter Voltage	580	665	700	mV	$V_{CE}=5.0V, I_C=2.0mA$
I_{CBO}	Collector-Cutoff Current	---	---	15	nA	$V_{CB}=30V, I_E=0$
f_T	Gain Bandwidth Product	---	200	---	MHz	$V_{CE}=5.0V, I_C=10mA,$ $f=100MHz$
C_{OB}	Collector-output Capacitance	---	2	---	pF	$V_{CB}=10V, f=1.0MHz$


BC847BS




Micro Commercial Components

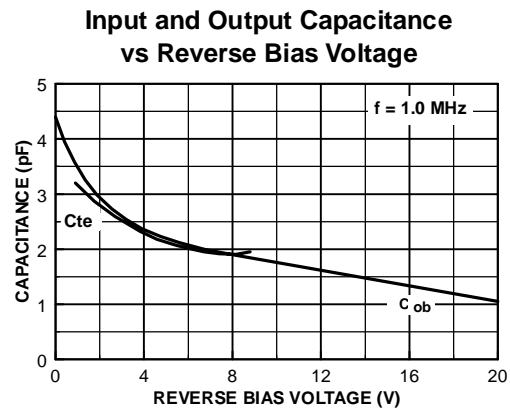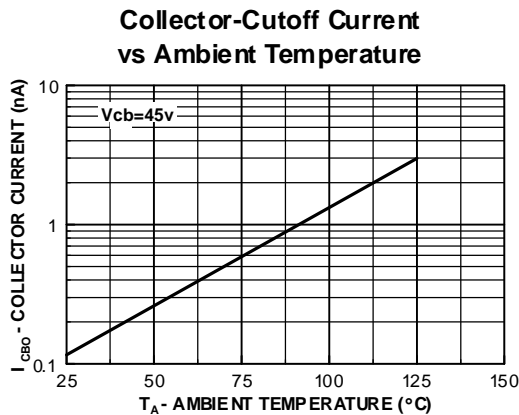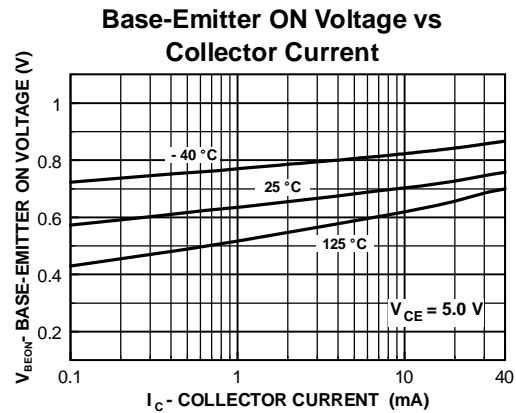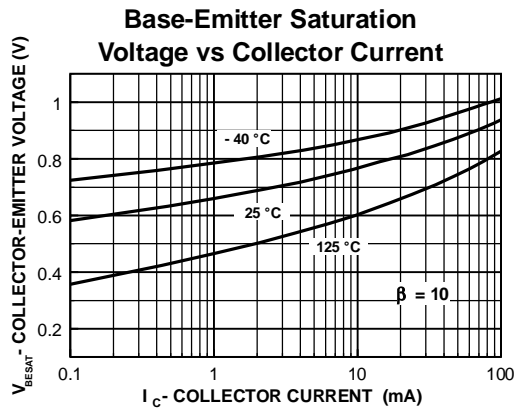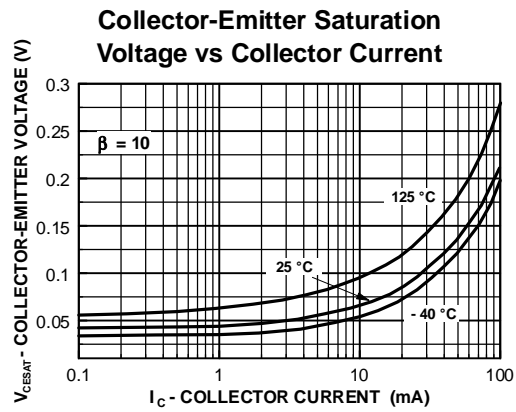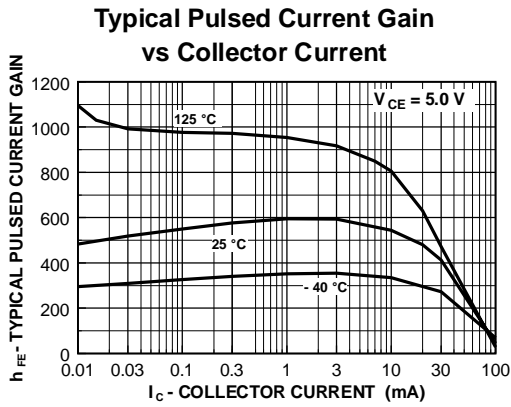


Contours of Constant Gain Bandwidth Product (f_T)

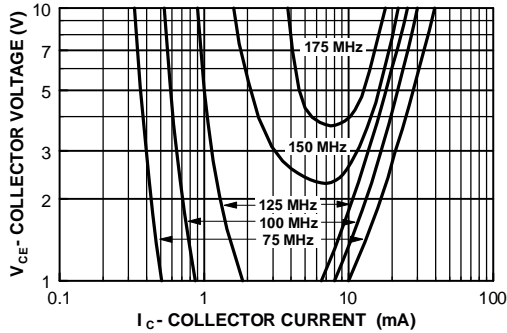


Normalized Collector-Cutoff Current vs Ambient Temperature

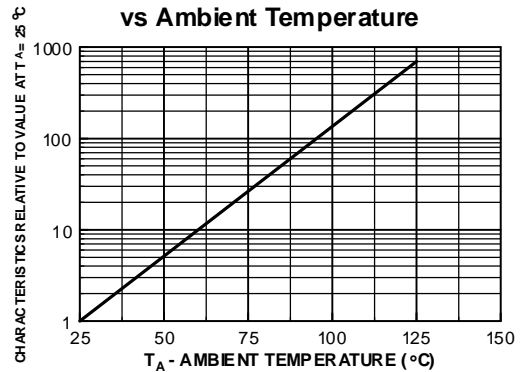


Noise Figure vs Frequency

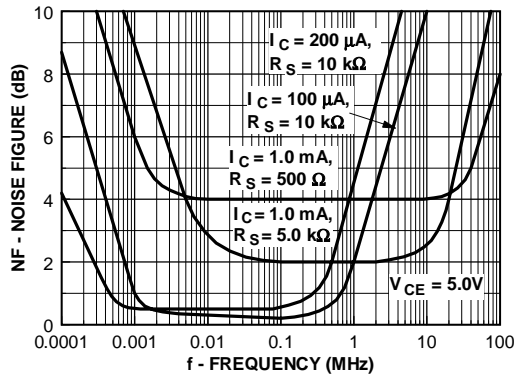

Wideband Noise Frequency vs Source Resistance

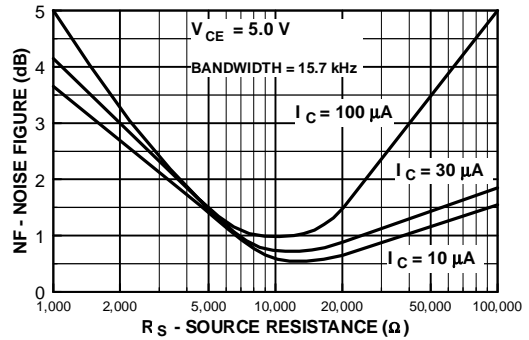

Power Dissipation vs Ambient Temperature

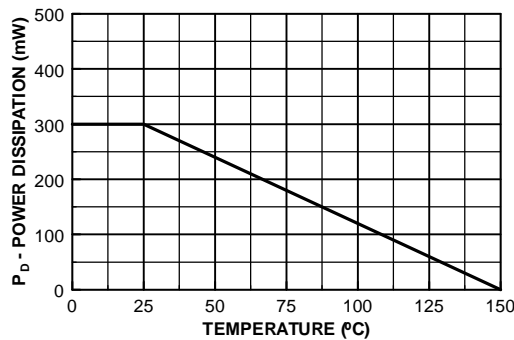



Micro Commercial Components

Ordering Information

Device (Part Number)-TP	Packing Tape&Reel;3Kpcs/Reel
----------------------------	---------------------------------

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.