



PCB LAYOUT

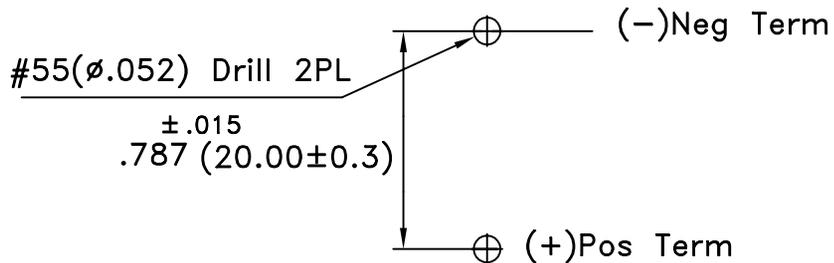

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/01/05	A	In contact details, .0236 was .029 Added material thickness Removed Plating thickness	T.B.	B.S.	
10/22/05	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
11/05/05	C	REDRAWN ALL VIEWS	T.B.	B.S.	

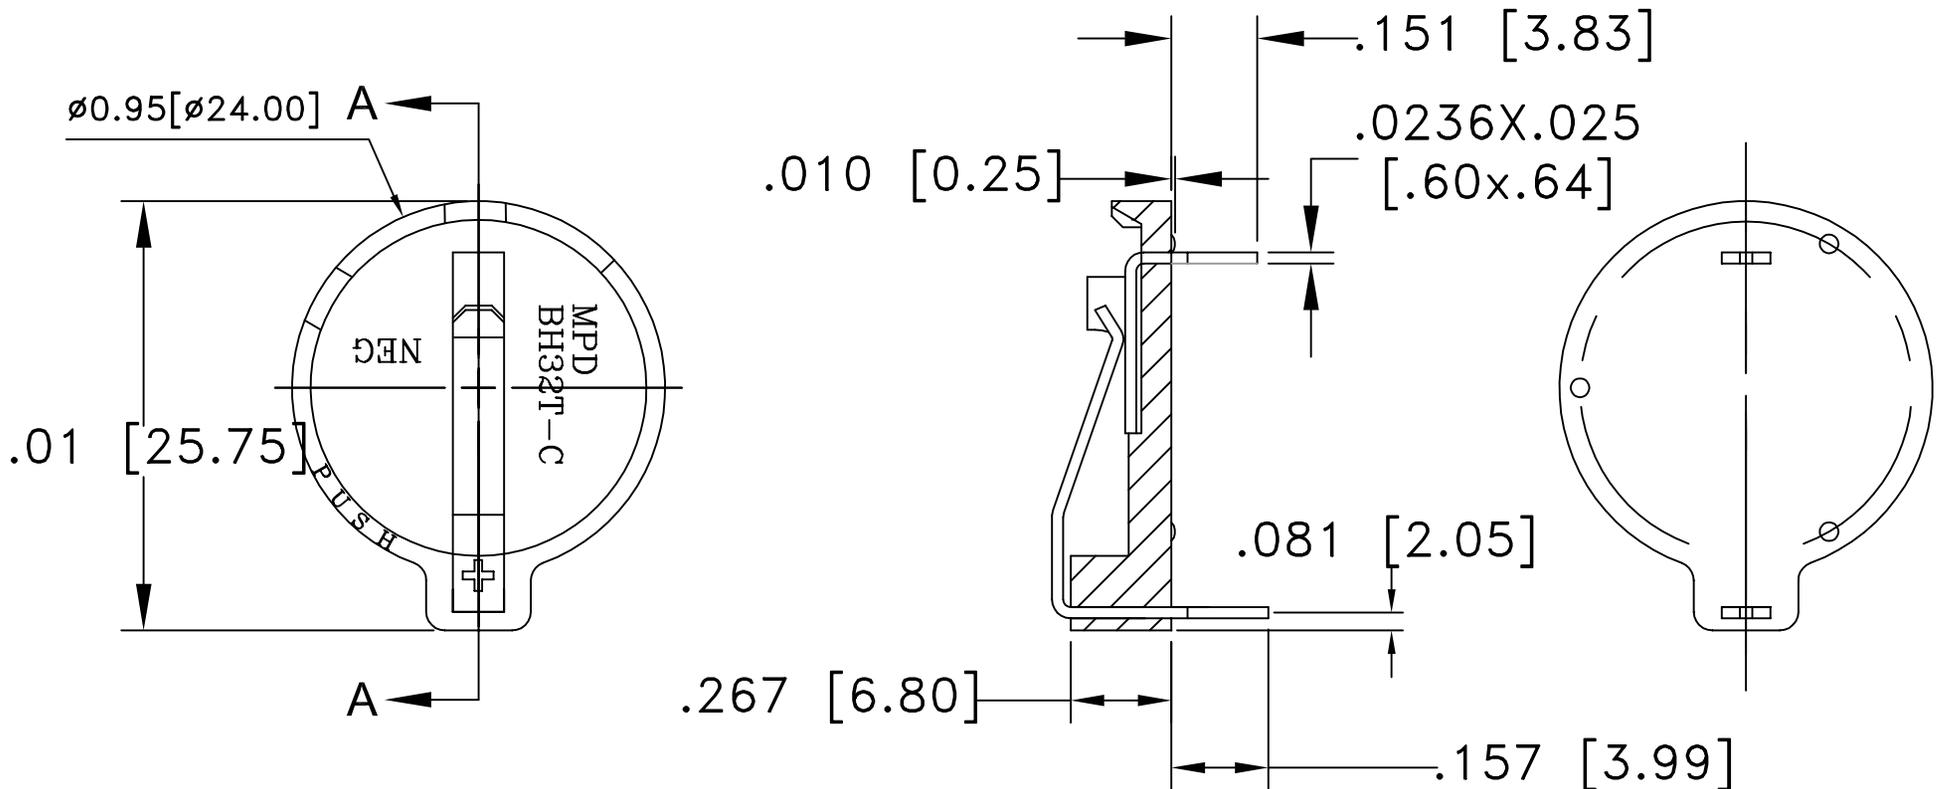

SPECIFICATIONS

- *Holder material- Black PBT
- *Flammability rating-UL94V-0, UL file no. E53829
- *Contacts :
Positive: 0.0236" Thick PHOS-BRONZE, Nickel Plated
Negative: spring tempered Stainless Steel, Nickel Plated
- *Temperature Range: -40°C to +140°C
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title	Approved By T.B.	
Angular ± 3°	Date	Drawing Number	
	11/05/05	BH32T-C	