

# SMD Schottky Barrier Rectifier

**COMCHIP**  
SMD DIODE SPECIALIST

## CDBA120 Thru CDBA1100

Reverse Voltage: 20 - 100 Volts

Forward Current: 1.0 Amp



### Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Built-in strain relief
- Low forward voltage drop


### Mechanical data

Case: JEDEC DO-214AC molded plastic  
Terminals: solderable per MIL-STD-750,  
method 2026

Polarity: Color band denotes cathode end

Mounting position: Any

Approx. weight: 0.064 gram

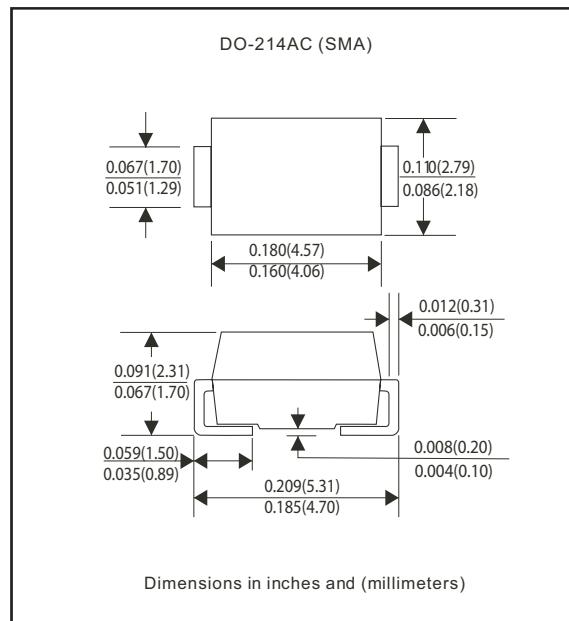

### Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBA120	CDBA140	CDBA160	CDBA180	CDBA1100	Unit
Max. Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	40	60	80	100	V
Max. DC Blocking Voltage	V <sub>DC</sub>	20	40	60	80	100	V
Max. RMS Voltage	V <sub>RMS</sub>	14	28	42	56	70	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rateload ( JEDEC method )	I <sub>FSM</sub>			40			A
Max. Average Forward Current	I <sub>o</sub>			1.0			A
Max. Instantaneous Forward Voltage at 1.0 A	V <sub>F</sub>		0.50	0.70	0.85		V
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C	I <sub>R</sub>			0.5			.mA
			6		5		
Ta=100°C							
Max. Thermal Resistance (Note 1)	R <sub>θJA</sub>			88			°C/W
	R <sub>θJL</sub>			20			
Operating Junction Temperature	T <sub>j</sub>		-50 to +125				°C
Storage Temperature	T <sub>STG</sub>		-65 to +150				°C

Note 1: Thermal resistance from junction to ambient and junction to lead P.C.B. Mounted on 0.2 x 0.2 copper pad areas

# SMD Schottky Barrier Rectifier

**COMCHIP**  
SMD DIODE SPECIALIST

## Rating and Characteristic Curves (CDBA120 Thru CDBA1100)

Fig. 1 - Reverse Characteristics

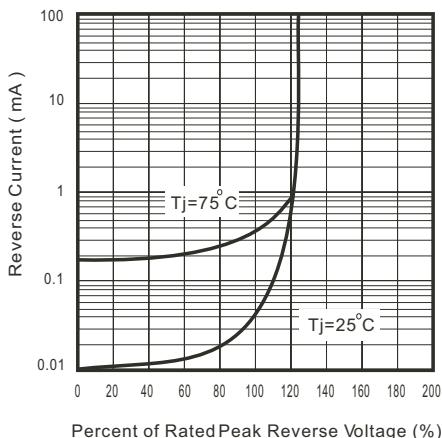


Fig.2 - Forward Characteristics

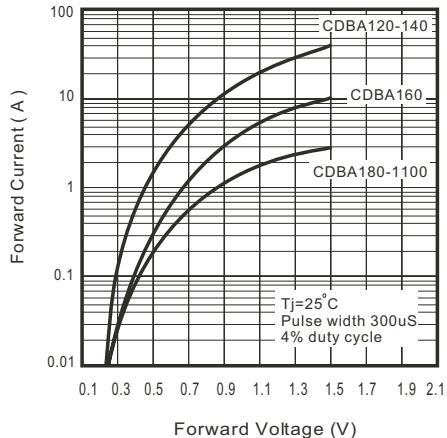


Fig. 3 - Junction Capacitance

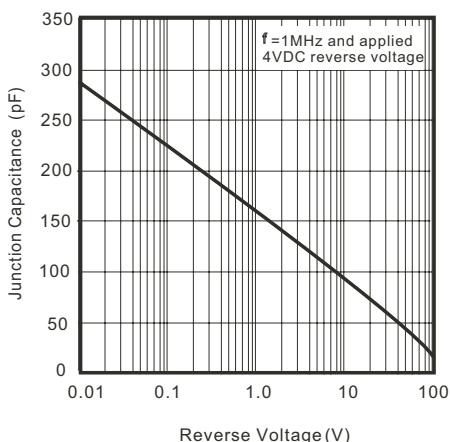


Fig. 4 - Current Derating Curve

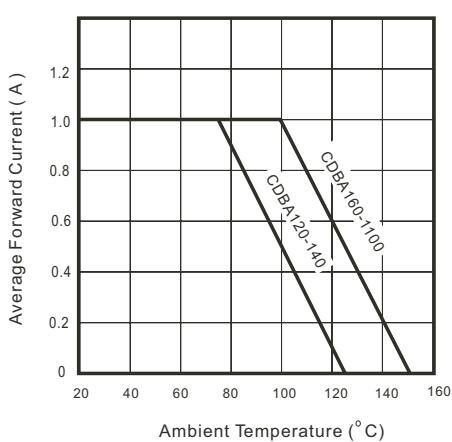


Fig. 5 - Non repetitive forward surge current

