

DS8922/DS8922A/DS8923A TRI-STATE RS-422 Dual Differential Line Driver and Receiver Pairs

Check for Samples: [DS8922](#), [DS8922A](#), [DS8923A](#)

FEATURES

- 12 ns Typical Propagation Delay
- Output Skew— ± 0.5 ns Typical
- Meets the Requirements of EIA Standard RS-422
- Complementary Driver Outputs
- High Differential or Common-Mode Input Voltage Ranges of $\pm 7V$
- $\pm 0.2V$ Receiver Sensitivity over the Input Voltage Range
- Receiver Input Fail-Safe Circuitry
- Receiver Input Hysteresis—70 mV typical
- Glitch Free Power Up/Down
- TRI-STATE Outputs

DESCRIPTION

The DS8922/22A and DS8923A are Dual Differential Line Driver and Receiver pairs. These devices are designed specifically for applications meeting the ST506, ST412 and ESDI Disk Drive Standards. In addition, the devices meet the requirements of the EIA Standard RS-422.

These devices offer an input sensitivity of 200 mV over a $\pm 7V$ common mode operating range. Hysteresis is incorporated (typically 70 mV) to improve noise margin for slowly changing input waveforms. An input fail-safe circuit is provided such that if the receiver inputs are open the output assumes the logical one state.

The DS8922A and DS8923A drivers are designed to provide unipolar differential drive to twisted pair or parallel wire transmission lines. Complementary outputs are logically ANDed and provide an output skew of 0.5 ns (typ.) with propagation delays of 12 ns.

Both devices feature TRI-STATE outputs. The DS8922/22A have independent control functions common to a driver and receiver pair. The DS8923A has separate driver and receiver control functions.

Power up/down circuitry is featured which will TRI-STATE the outputs and prevent erroneous glitches on the transmission lines during system power up or power down operation.

The DS8922/22A and DS8923A are designed to be compatible with TTL and CMOS.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.




These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

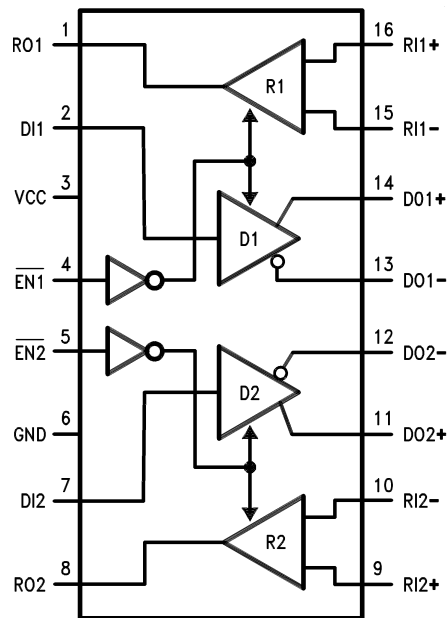

DS8922A Dual-In-Line
Top View

See Package Number D (R-PDSO-G16) or NFG0016E

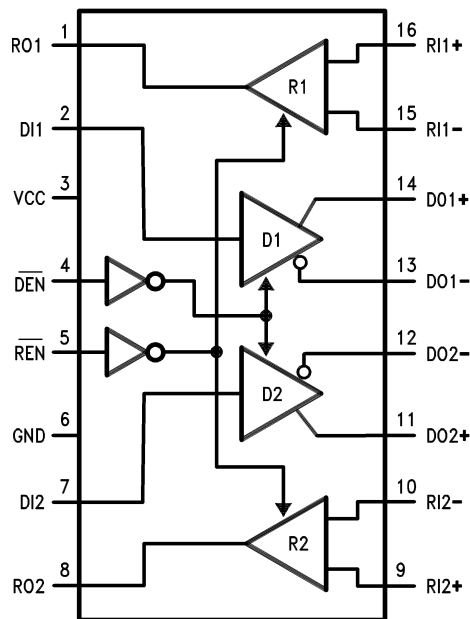

DS8923A Dual-In-Line
Top View

See Package Number D (R-PDSO-G16) or NFG0016E

DS8922/22A

| $\overline{EN1}$ | $\overline{EN2}$ | RO1 | RO2 | DO1 | DO2 |
|------------------|------------------|--------|--------|--------|--------|
| 0 | 0 | ACTIVE | ACTIVE | ACTIVE | ACTIVE |
| 1 | 0 | HI-Z | ACTIVE | HI-Z | ACTIVE |
| 0 | 1 | ACTIVE | HI-Z | ACTIVE | HI-Z |
| 1 | 1 | HI-Z | HI-Z | HI-Z | HI-Z |

DS8923A

| \overline{DEN} | \overline{REN} | RO1 | RO2 | DO1 | DO2 |
|------------------|------------------|--------|--------|--------|--------|
| 0 | 0 | ACTIVE | ACTIVE | ACTIVE | ACTIVE |
| 1 | 0 | ACTIVE | ACTIVE | HI-Z | HI-Z |
| 0 | 1 | HI-Z | HI-Z | ACTIVE | ACTIVE |
| 1 | 1 | HI-Z | HI-Z | HI-Z | HI-Z |

Absolute Maximum Ratings ⁽¹⁾⁽²⁾

| | |
|---|-----------------|
| Supply Voltage | 7V |
| Drive Input Voltage | -0.5V to +7V |
| Output Voltage | 5.5V |
| Receiver Output Sink Current | 50 mA |
| Receiver Input Voltage | ±10V |
| Differential Input Voltage | ±12V |
| Maximum Package Power Dissipation @ +25°C | |
| D Package | 1300 mW |
| NFG Package | 1450 mW |
| Derate D Package 10.4 mW/°C above +25°C | |
| Derate NFG Package 11.6 mW/°C above +25°C | |
| Storage Temperature Range | -65°C to +165°C |
| Lead Temp. (Soldering, 4 seconds) | 260°C |
| ESD Rating (HBM) | 2000V+ |

- (1) "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be ensured. They are not meant to imply that the device should be operated at these limits. The Table of [Electrical Characteristics](#) provides conditions for actual device operation.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.

Recommended Operating Conditions

| | Min | Max | Units |
|-------------------------------|-----|-----|-------|
| Supply Voltage | 4.5 | 5.5 | V |
| Temperature (T _A) | 0 | 70 | °C |

DS8922/22A and DS8923A Electrical Characteristics⁽¹⁾⁽²⁾⁽³⁾

| Symbol | Conditions | Min | Typ | Max | Units |
|---------------------------------|---|------|-----|-------|-------|
| RECEIVER | | | | | |
| V_{TH} | $-7V \leq V_{CM} \leq +7V$ | -200 | ±35 | +200 | mV |
| V_{HYST} | $-7V \leq V_{CM} \leq +7V$ | 15 | 70 | | mV |
| R_{IN} | $V_{IN} = -7V, +7V$ (Other Input = GND) | 4.0 | 6.0 | | kΩ |
| I_{IN} | $V_{IN} = 10V$ | | | 3.25 | mA |
| | $V_{IN} = -10V$ | | | -3.25 | mA |
| V_{OH} | $V_{CC} = MIN, I_{OH} = -400 \mu A$ | 2.5 | | | V |
| V_{OL} | $V_{CC} = MAX, I_{OL} = 8 mA$ | | | 0.5 | V |
| I_{SC} | $V_{CC} = MAX, V_{OUT} = 0V$ | -15 | | -100 | mA |
| DRIVER | | | | | |
| V_{OH} | $V_{CC} = MIN, I_{OH} = -20 mA$ | 2.5 | | | V |
| V_{OL} | $V_{CC} = MIN, I_{OL} = +20 mA$ | | | 0.5 | V |
| I_{OFF} | $V_{CC} = 0V, V_{OUT} = 5.5V$ | | | 100 | μA |
| $ VT - \overline{VT} $ | | | | 0.4 | V |
| VT | | 2.0 | | | V |
| $ V_{OS} - \overline{V_{OS}} $ | | | | 0.4 | V |
| I_{SC} | $V_{CC} = MAX, V_{OUT} = 0V$ | -30 | | -150 | mA |
| DRIVER and RECEIVER | | | | | |
| I_{OZ} | | | | 50 | μA |
| TRI-STATE | $V_{CC} = MAX$ | | | -50 | μA |
| Leakage | | | | | |
| I_{CC} | $V_{CC} = MAX$ | | | 76 | mA |
| | | | | 78 | mA |
| DRIVER and ENABLE INPUTS | | | | | |
| V_{IH} | | 2.0 | | | V |
| V_{IL} | | | | 0.8 | V |
| I_{IL} | $V_{CC} = MAX, V_{IN} = 0.4V$ | | -40 | -200 | μA |
| I_{IH} | $V_{CC} = MAX, V_{IN} = 2.7V$ | | | 20 | μA |
| I_I | $V_{CC} = MAX, V_{IN} = 7.0V$ | | | 100 | μA |
| V_{CL} | $V_{CC} = MIN, I_{IN} = -18 mA$ | | | -1.5 | V |

(1) All currents into device pins are shown as positive values; all currents out of the device are shown as negative; all voltages are referenced to ground unless otherwise specified. All values shown as max or min are classified on absolute value basis.

(2) All typical values are $V_{CC} = 5V, T_A = 25^\circ C$.

(3) Only one output at a time should be shorted.

Receiver Switching Characteristics (Figure 1) (Figure 2) (Figure 2)

| Parameter | Conditions | Min | Typ | Max | | Units |
|---------------------------|--------------------|-----|-----|------|-----------|-------|
| | | | | 8922 | 8922A/23A | |
| T_{pLH} | CL = 30 pF | | 12 | 22.5 | 20 | ns |
| T_{pHL} | CL = 30 pF | | 12 | 22.5 | 20 | ns |
| $ T_{pLH} - T_{pHL} $ | CL = 30 pF | | 0.5 | 5 | 3.5 | ns |
| Skew (Channel to Channel) | CL = 30 pF | | 0.5 | 3.0 | 2.0 | ns |
| T_{pLZ} | CL = 15 pF S2 Open | | 15 | | | ns |
| T_{pHZ} | CL = 15 pF S1 Open | | 15 | | | ns |
| T_{pZL} | CL = 30 pF S2 Open | | 20 | | | ns |
| T_{pZH} | CL = 30 pF S1 Open | | 20 | | | ns |

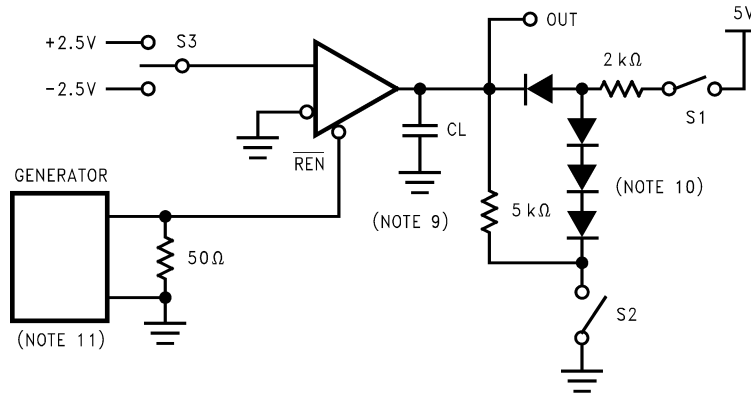


Figure 2.


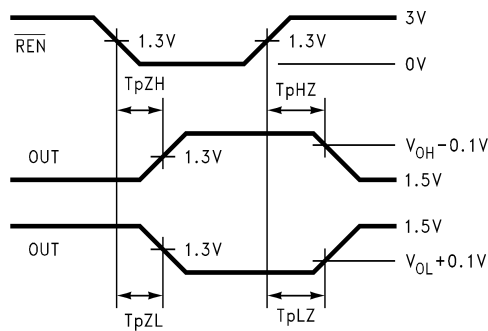


Figure 3.

| | S1 | S2 | S3 |
|------------------|--------|--------|-------|
| T _{PLZ} | Closed | Open | +2.5V |
| T _{PHZ} | Open | Closed | -2.5V |
| T _{PZL} | Closed | Open | +2.5V |
| T _{PZH} | Open | Closed | -2.5V |

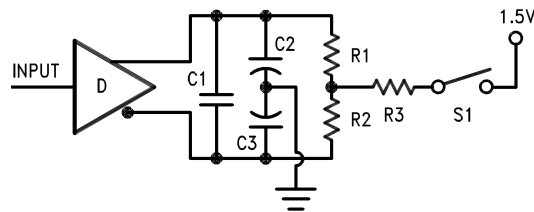

NOTE: C1=C2=C3=30 pF, R1=R2=50 Ω, R3=500 Ω

Figure 4.

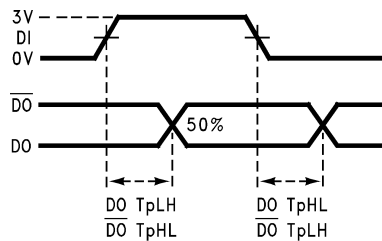


Figure 5.

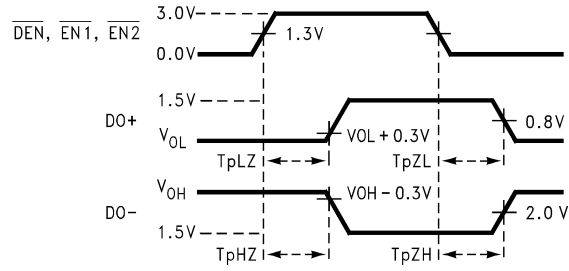


Figure 6.

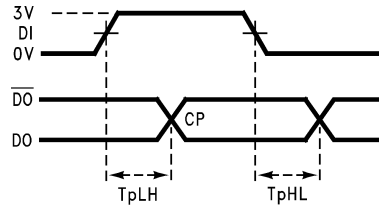


Figure 7.

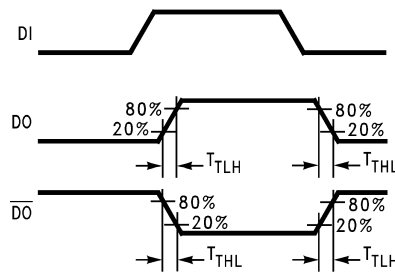


Figure 8.

Typical Performance Characteristics
(DS8923A)

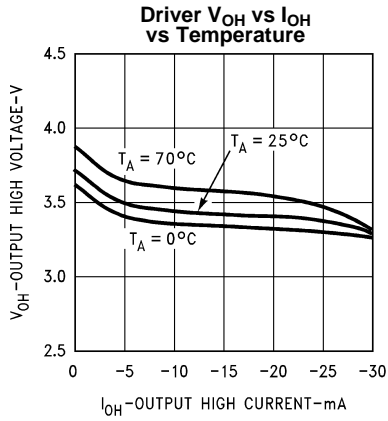


Figure 9.

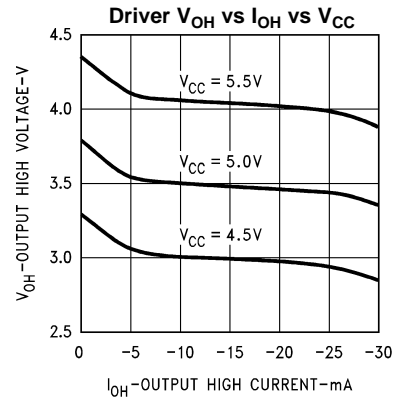


Figure 10.

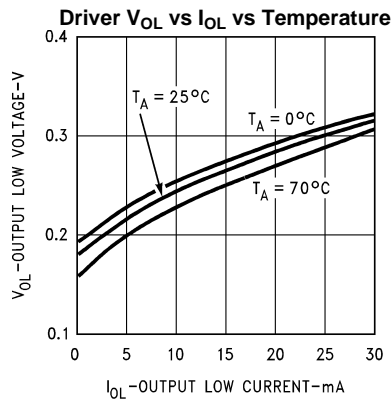


Figure 11.

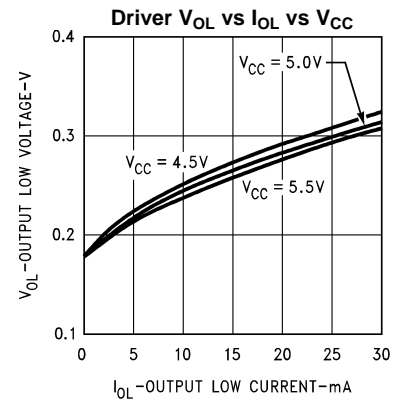


Figure 12.

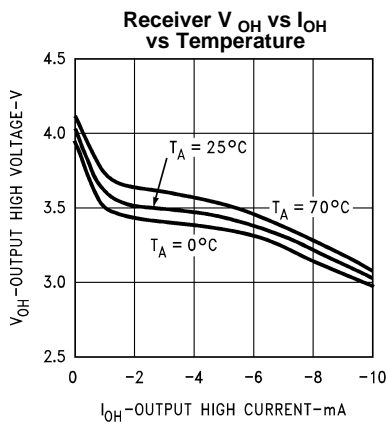


Figure 13.

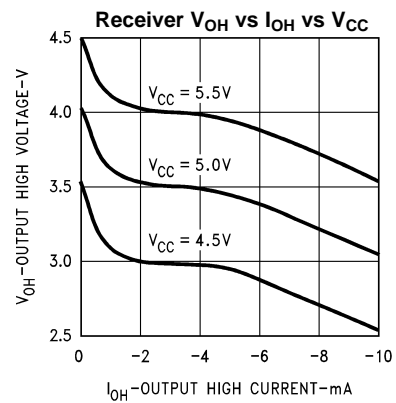


Figure 14.

Typical Performance Characteristics (continued)

(DS8923A)

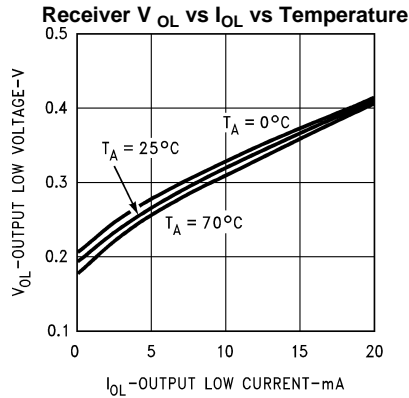


Figure 15.

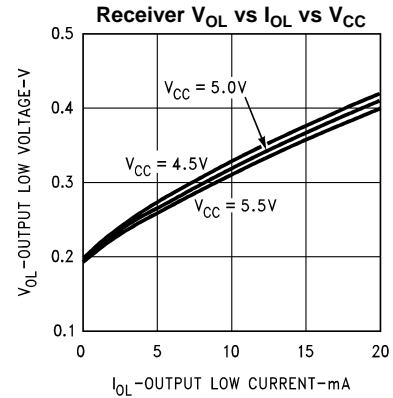


Figure 16.

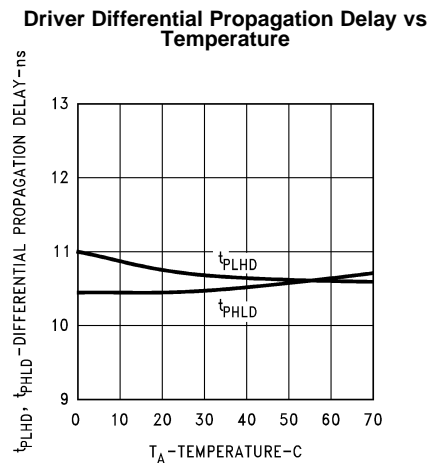


Figure 17.

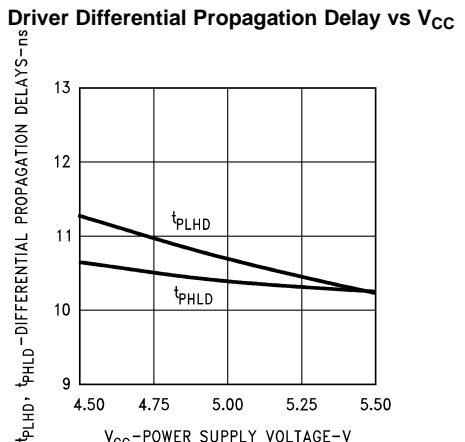


Figure 18.

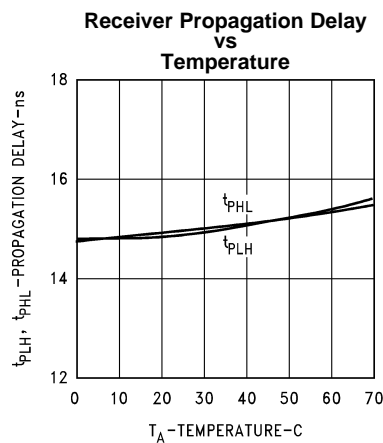


Figure 19.

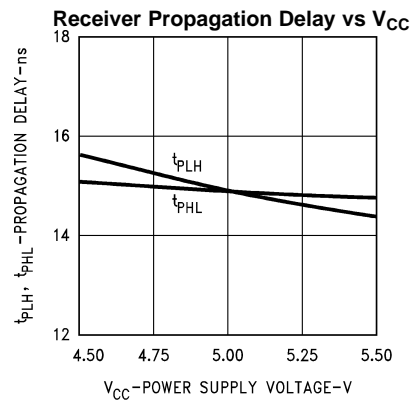


Figure 20.

Typical Performance Characteristics (continued)

(DS8923A)

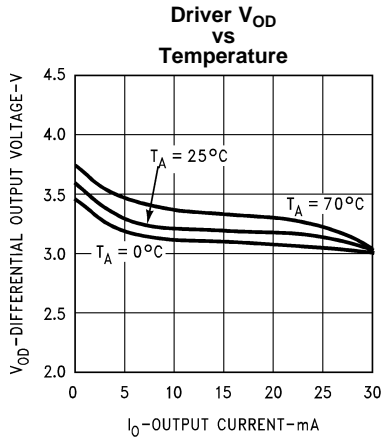


Figure 21.

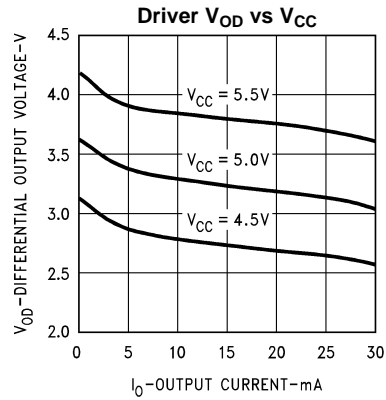


Figure 22.

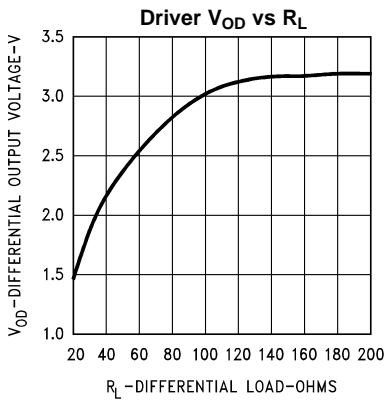


Figure 23.

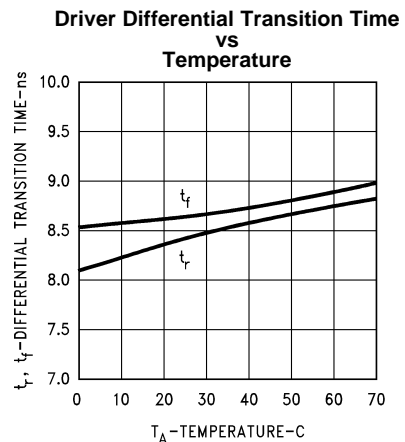


Figure 24.

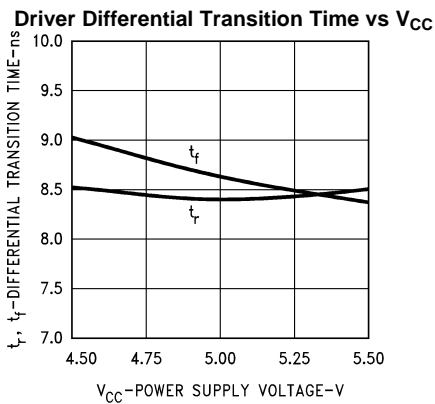


Figure 25.

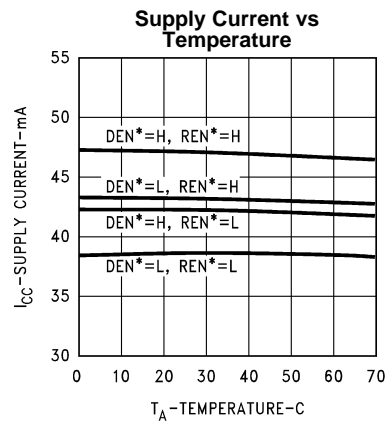


Figure 26.

Typical Performance Characteristics (continued)

(DS8923A)

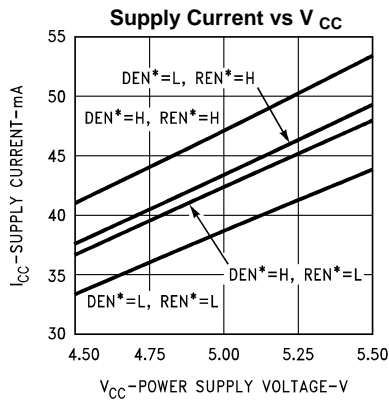


Figure 27.

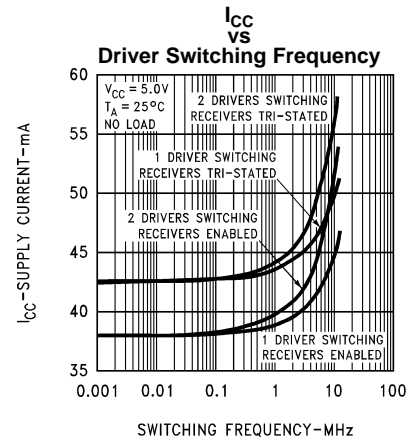


Figure 28.

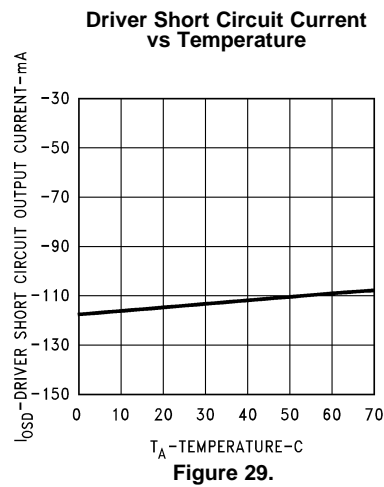


Figure 29.

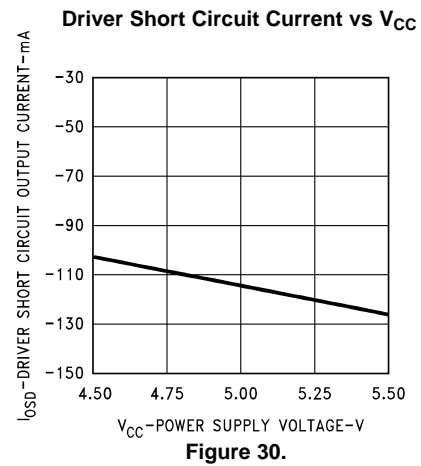


Figure 30.

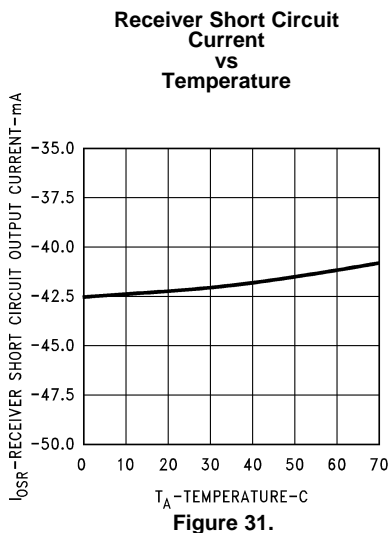


Figure 31.

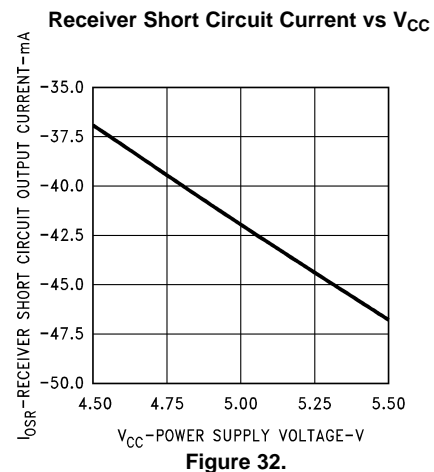


Figure 32.

TYPICAL APPLICATIONS

Figure 33. ESDI Application

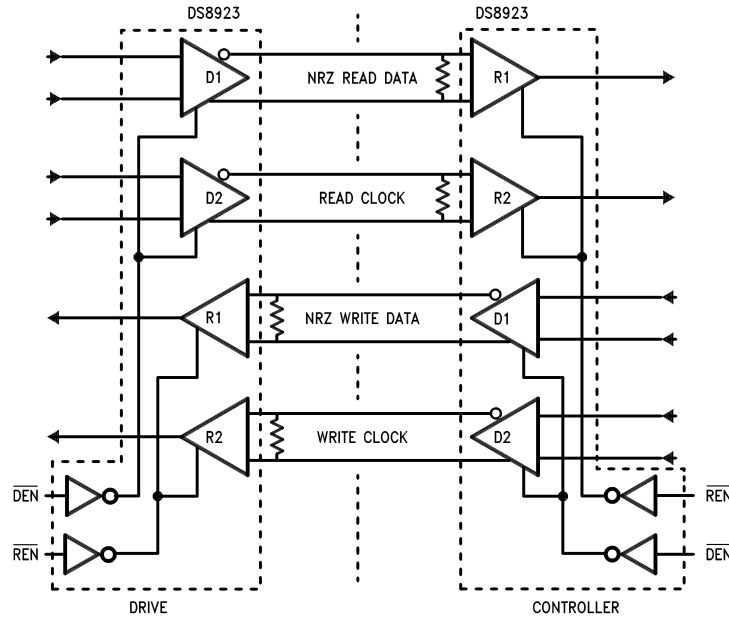


Figure 34.

Figure 35. ST504 and ST412 Applications

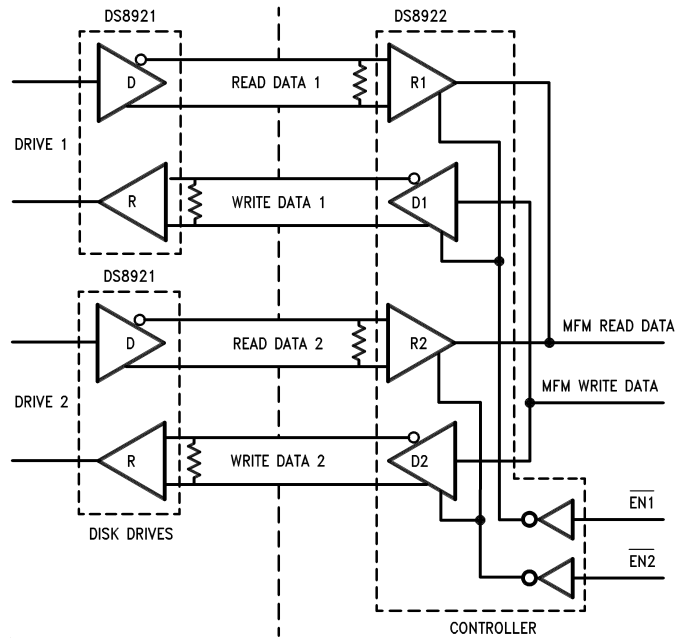


Figure 36.

REVISION HISTORY

| Changes from Revision A (April 2013) to Revision B | Page |
|--|--------------------|
| • Changed layout of National Data Sheet to TI format | 12 |

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish | MSL Peak Temp (3) | Op Temp (°C) | Top-Side Markings (4) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| DS8922AM | ACTIVE | SOIC | D | 16 | 48 | TBD | Call TI | Call TI | 0 to 70 | DS8922AM | Samples |
| DS8922AM/NOPB | ACTIVE | SOIC | D | 16 | 48 | Green (RoHS & no Sb/Br) | CU SN | Level-1-260C-UNLIM | 0 to 70 | DS8922AM | Samples |
| DS8922AMX | ACTIVE | SOIC | D | 16 | 2500 | TBD | Call TI | Call TI | 0 to 70 | DS8922AM | Samples |
| DS8922AMX/NOPB | ACTIVE | SOIC | D | 16 | 2500 | Green (RoHS & no Sb/Br) | CU SN | Level-1-260C-UNLIM | 0 to 70 | DS8922AM | Samples |
| DS8923AM | ACTIVE | SOIC | D | 16 | 48 | TBD | Call TI | Call TI | 0 to 70 | DS8923AM | Samples |
| DS8923AM/NOPB | ACTIVE | SOIC | D | 16 | 48 | Green (RoHS & no Sb/Br) | CU SN | Level-1-260C-UNLIM | 0 to 70 | DS8923AM | Samples |
| DS8923AN | ACTIVE | PDIP | NFG | 16 | 25 | TBD | Call TI | Call TI | 0 to 70 | DS8923AN | Samples |
| DS8923AN/NOPB | ACTIVE | PDIP | NFG | 16 | 25 | Pb-Free (RoHS) | SN | Level-1-NA-UNLIM | 0 to 70 | DS8923AN | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

NFG0016E

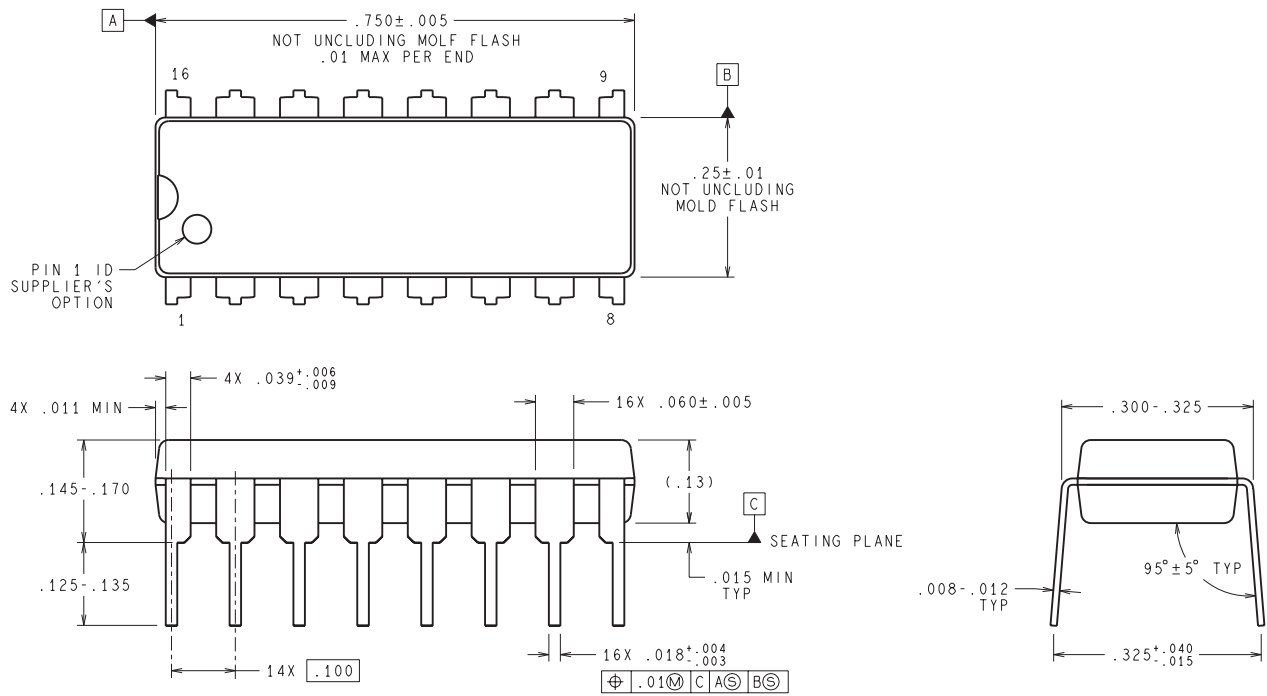

DIMENSIONS ARE IN INCHES
 DIMENSIONS IN () FOR REFERENCE ONLY

N16E (Rev G)

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AC.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com