


EDZ 350

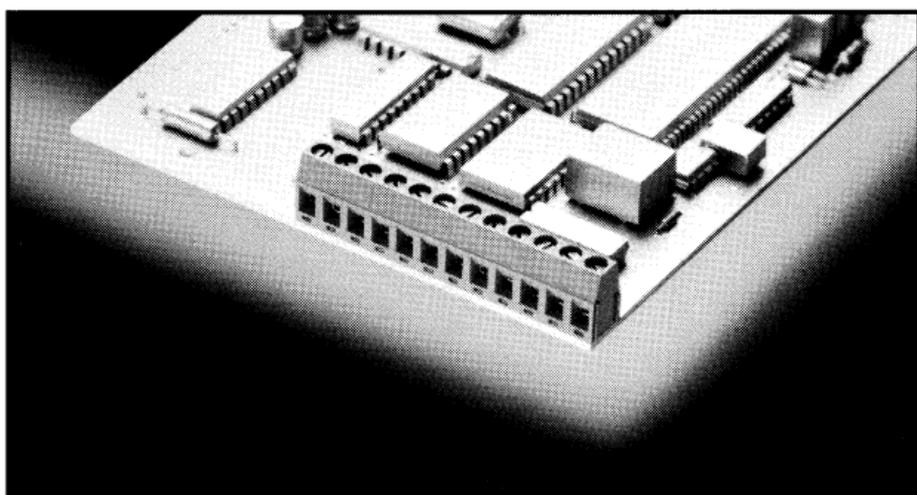

Spacing 5.08 mm
insert required no. of poles **
How to order see page 6

Ratings:

* Approvals pending



UL1059



CSA 22.2 No. 158



EN 60998

	250 VB	300 VB	250 V
Rated Voltage	250 VB	300 VB	250 V
Rated Current	16 A	16 A	24 A (T60)
Wire Size	AWG 22-12	AWG 28-14	2.5 mm ²
Test Voltage			2.0 kV
Rated Torque/Screw Size			0.5 Nm/M3

Rated Cross Section

Single Wire (solid)	2.5 mm ²
Stranded Wire (flexible)	1.5 mm ²
Stranded wire with Ferrules	1.5 mm ²

Dimensions

Spacing	5.08 mm
PCB Hole Diameter	1.3 mm
Stripped Length	6.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Color	Green

