


# #FSLM2520-100J=P2



## Appearance & Shape

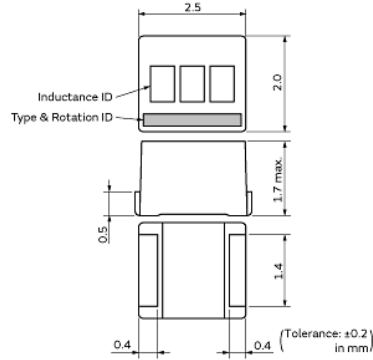

## References

Packaging	Specifications	Minimum Order Quantity
=P2	180Embossed Tape	2000

Mass (typ.)	
1 piece	0.02g

## Notices

Rated current is specified when the decrease of the initial inductance value at 10%. Or rated current is specified when temperature of the inductor is raised 20°C by DC current. Whichever is smaller.

### Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# #FSLM2520-100J=P2

## Specifications

L size	2.5±0.2mm
W size	2.0±0.2mm
T size	1.7mm
Size code inch (mm)	1008 (2520)
Inductance	10μH±5%
Inductance Test Frequency	2.52MHz
Max. of DC resistance	2.2Ω
Operating Temperature Range (Self-temperature rise is included)	-40°C to 85°C
Class of magnetic shield	No Shield
Q(min.)	25
Q Test Frequency	2.52MHz
Self resonance frequency (min.)	30MHz
Rated Current	155mA
Series	LLM2520

### Attention


1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# #FSLM2520-100J=P2

## Product Data

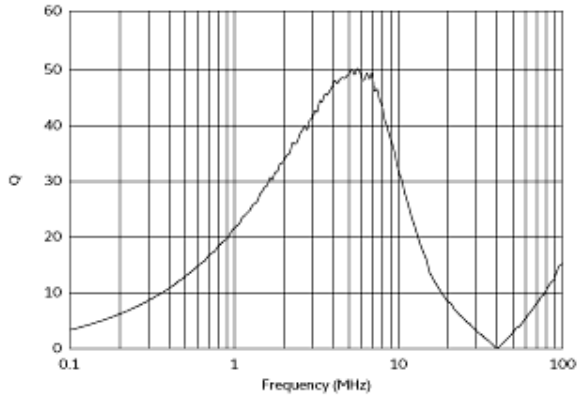

Q-Frequency Characteristics

### Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
  - 2.This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.