

Wirewound, Surface Mount, Molded, Shielded Inductors



STANDARD ELECTRICAL SPECIFICATIONS						
IND. (μH)	TOL.	TEST FREQ. (MHz) L & Q	Q MIN.	SRF MIN. (MHz)	DCR MAX. (Ω)	RATED DC CURRENT (1) (mA)
0.010	± 20 %	50	50	1000	0.10	810
0.012	± 20 %	50	50	1000	0.11	750
0.015	± 20 %	50	50	1000	0.12	720
0.018	± 20 %	50	50	1000	0.13	690
0.022	± 20 %	45	50	1000	0.15	640
0.027	± 20 %	45	50	1000	0.17	610
0.033	± 20 %	45	50	1000	0.18	585
0.039	± 20 %	40	50	1000	0.24	530
0.047	± 20 %	40	50	1000	0.26	495
0.056	± 20 %	40	50	1000	0.28	485
0.068	± 20 %	40	50	1000	0.35	475
0.082	± 20 %	38	50	900	0.45	460
0.10	± 20 %	36	50	700	0.50	450
0.12	± 20 %	40	25.2	500	0.20	630
0.15	± 20 %	40	25.2	470	0.20	600
0.18	± 20 %	40	25.2	400	0.24	580
0.22	± 20 %	40	25.2	330	0.30	565
0.27	± 20 %	40	25.2	310	0.33	500
0.33	± 20 %	40	25.2	280	0.36	475
0.39	± 20 %	40	25.2	230	0.40	465
0.47	± 20 %	40	25.2	220	0.44	460
0.56	± 20 %	40	25.2	200	0.46	455
0.68	± 20 %	40	25.2	180	0.48	450
0.82	± 20 %	40	25.2	160	0.50	450
1.0	± 10 %	30	7.96	120	0.60	400
1.2	± 10 %	30	7.96	110	0.65	390
1.5	± 10 %	30	7.96	90.0	0.75	370
1.8	± 10 %	30	7.96	85.0	0.85	350
2.2	± 10 %	30	7.96	65.0	0.90	320
2.7	± 10 %	30	7.96	60.0	1.00	290
3.3	± 10 %	30	7.96	60.0	1.10	270
3.9	± 10 %	30	7.96	58.0	1.20	250
4.7	± 10 %	30	7.96	52.0	1.25	220
5.6	± 10 %	30	7.96	50.0	1.40	210
6.8	± 10 %	30	7.96	40.0	1.60	205
8.2	± 10 %	30	7.96	35.0	1.65	195
10.0	± 10 %	30	2.52	30.0	2.00	185
12.0	± 10 %	30	2.52	24.0	2.30	175
15.0	± 10 %	30	2.52	20.0	2.50	165
18.0	± 10 %	30	2.52	17.0	2.70	155
22.0	± 10 %	30	2.52	16.0	3.10	150
27.0	± 10 %	30	2.52	14.5	3.30	125
33.0	± 10 %	30	2.52	14.5	5.10	115
39.0	± 10 %	30	2.52	14.0	5.90	105
47.0	± 10 %	30	2.52	13.0	8.00	100
56.0	± 10 %	30	2.52	11.5	10.0	95
68.0	± 10 %	30	2.52	11.0	10.0	90
82.0	± 10 %	30	2.52	11.0	11.0	85
100.0	± 10 %	30	0.796	6.0	12.0	80

Note

(1) Rated DC current based on the maximum temperature rise, not to exceed 40 °C at + 85 °C ambient

FEATURES

- Molded construction provides superior strength and moisture resistance
- Tape and reel packaging for automatic handling, 2000/reel, EIA-481
- Compatible with vapor phase, infrared and wave soldering methods
- Shielded construction minimizes coupling to other components
- Compliant to RoHS directive 2002/95/EC


RoHS COMPLIANT
ELECTRICAL SPECIFICATIONS
Inductance Range: 0.01 μH to 100 μH

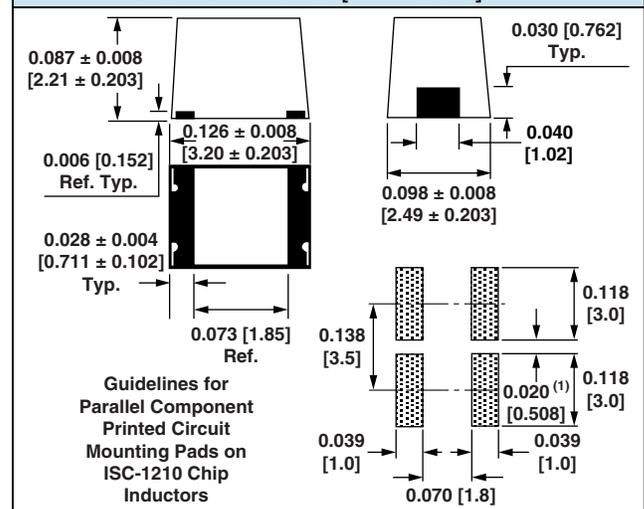
Inductance Tolerance: ± 20 % for 0.01 μH to 0.82 μH
 ± 10 % for 1.0 μH to 100 μH standard
 ± 5 %, ± 3 % available

Operating Temperature: - 55 °C to + 125 °C

Coilform Material: Non-magnetic for 0.01 μH to 0.10 μH
 Powdered iron for 0.12 μH to 100 μH

TEST EQUIPMENT

- H/P 4342A Q meter with Vishay Dale test fixture or equivalent
- H/P 4191A RF impedance analyzer (for SRF measurements)
- Wheatstone bridge

DIMENSIONS in inches [millimeters]

Note

(1) Recommended minimum spacing between components

PART MARKING

- Vishay Dale
- Inductance value
- Date code

DESCRIPTION

ISC-1210	10 μH	± 10 %	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

I	S	C	1	2	1	0	E	R	1	0	0	K
PRODUCT FAMILY			SIZE				PACKAGE CODE		INDUCTANCE VALUE			TOL.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.