


LQG18HH33NJ00#

" # " indicates a package specification code.



< List of part numbers with package codes >
LQG18HH33NJ00D , LQG18HH33NJ00J , LQG18HH33NJ00B

Shape

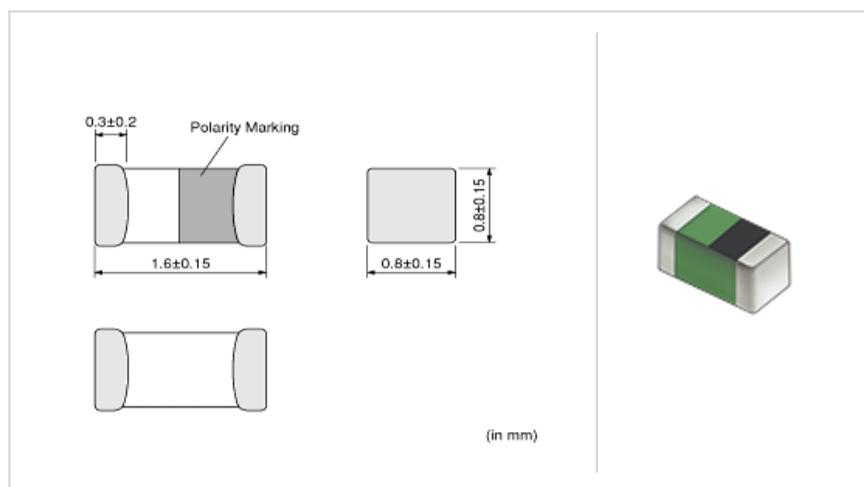

L size	1.6 ± 0.15mm
W size	0.8 ± 0.15mm
T size	0.8 ± 0.15mm
Size code mm (inch)	1608 (0603)

Specifications

Inductance	33nH ± 5%
Inductance test frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	300mA
Max. of DC resistance	0.60
Q (min.)	12
Q test frequency	100MHz
Self resonance frequency (min.)	1200MHz
Operating temperature range (Self-temperature rise is not included)	-55 ~ +125

References


Packaging code	Specifications	Minimum quantity
D	Paper tape (180mm)	4000
J	Paper tape (330mm)	10000
B	Packing in bulk	1000

Mass (Typ.)	
1 piece	0.003g


⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

▪ Inductance-Frequency characteristics (Typ.)

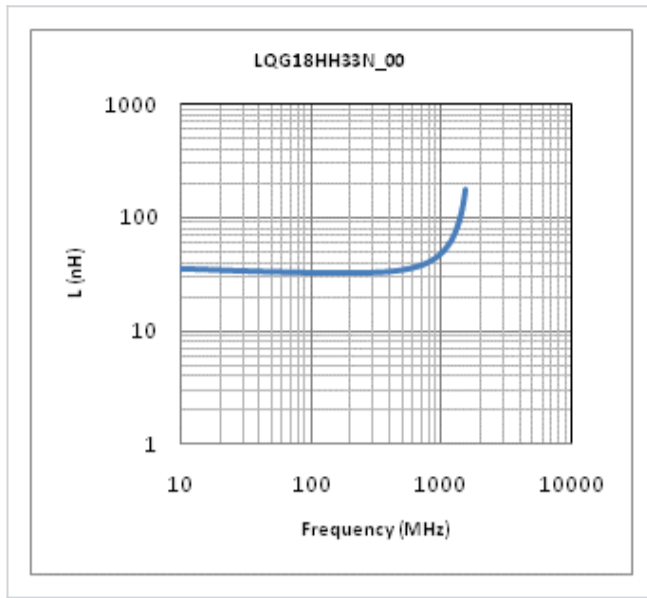

▪ Q-Frequency characteristics (Typ.)

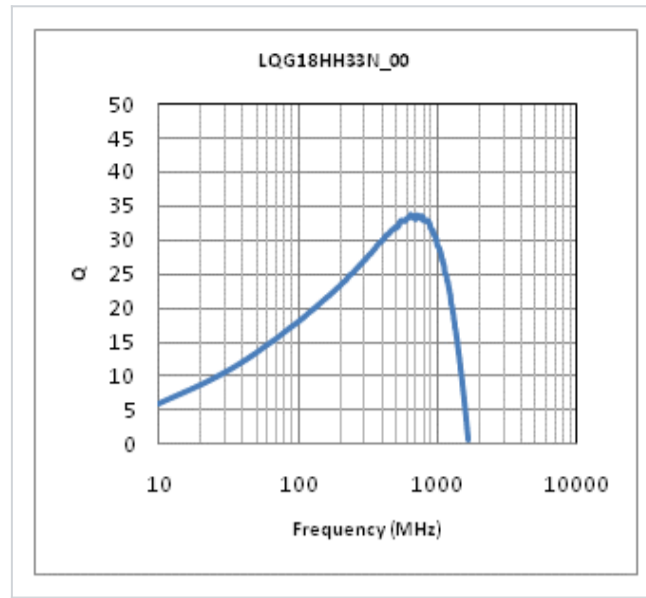

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.