

# Customer Information Sheet

DRAWING No.: M50-350XX42

SHEET 2 OF 2

IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

**NOTES:**

1. ALL TOLERANCES ARE  $\pm 0.25$  UNLESS OTHERWISE STATED.
2. RECOMMENDED HOLE SIZE =  $\varnothing 0.65 \pm 0.05$ mm.

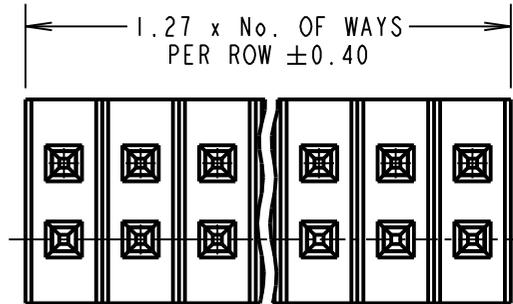


**SPECIFICATION:**

**MATERIAL:**  
 MOULDING = HIGH TEMP THERMOPLASTIC UL94V-0, BLACK  
 CONTACT = HIGH STRENGTH COPPER ALLOY  
**FINISH (CONTACT):**  
 42 = 0.15 - 0.08 $\mu$  GOLD ON CONTACT AREA,  
 2.5 - 3.0 $\mu$  100% TIN ON TAILS,  
 ALL OVER 0.70 - 1.3 $\mu$  NICKEL

**ELECTRICAL:**  
 CURRENT RATING (ALL CONTACTS ARE ELECTRICALLY LOADED) = 1A MAX  
 CONTACT RESISTANCE = 30 m $\Omega$  MAX  
 INSULATION RESISTANCE = 5,000 M $\Omega$  MIN  
 DIELECTRIC STRENGTH = 500V AC/DC

**MECHANICAL:**  
 DURABILITY = 600 OPERATIONS

**ENVIRONMENTAL:**  
 TEMPERATURE RANGE = -40°C TO +105°C  
 FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION  
 C029XX (LATEST ISSUE)

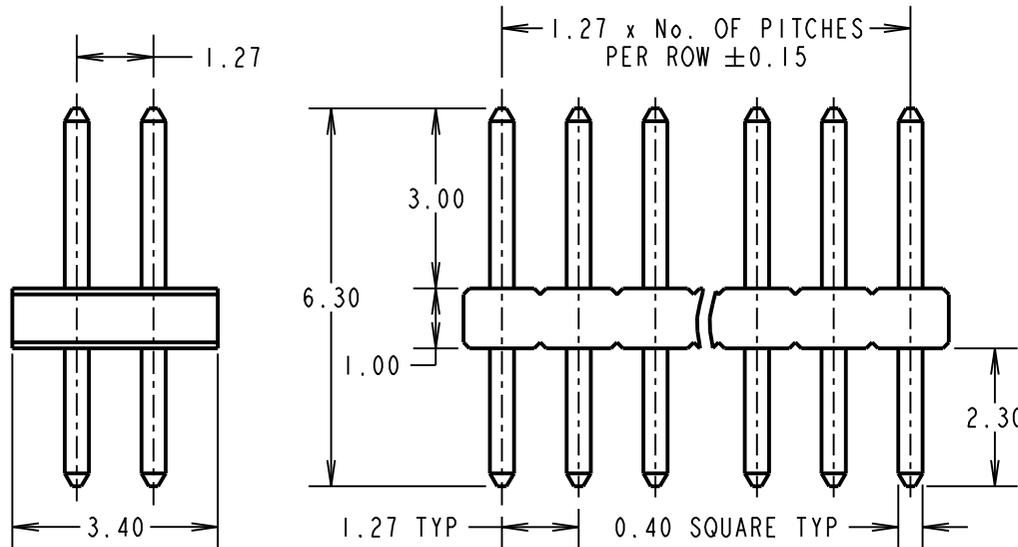

ORDER CODE:

**M50-350XX42**

No. OF WAYS PER ROW  
 01 TO 50

FINISH:  
 42 = SELECTIVE GOLD + 100% TIN

RA	10	21.12.11	11604
NAME	ISS.	DATE	C/NOTE
APPROVED:		R. ADDE	
CHECKED:		M.G.PLESTED	
DRAWN:		W. J. BOURNE	
CUSTOMER REF.:			
ASSEMBLY DRG:			

**HARWIN**

www.harwin.com  
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

**TOLERANCES**  
~~X =  $\pm 1$ mm  
 X.X =  $\pm 0.25$ mm  
 X.XX =  $\pm 0.10$ mm  
 X.XXX =  $\pm 0.01$ mm  
 ANGLES =  $\pm 5^\circ$   
 UNLESS STATED~~

**MATERIAL:**

SEE ABOVE

**FINISH:**

SEE ABOVE

**S/AREA:**

mm<sup>2</sup>

**TITLE:**

1.27mm PITCH DIL  
 VERTICAL PIN HEADER

**DRAWING NUMBER:**

**M50-350XX42**

SHT  
 2 OF 2