


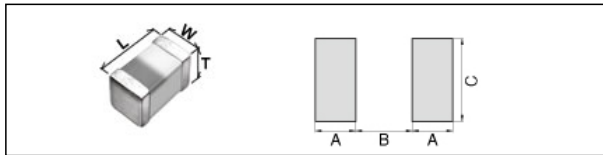


MLG1608B4N7ST000

Applications		Commercial Grade
Feature		Multilayer
		Non-Magnetic Core (Dielectric Ceramic)
Series	MLG Series / MLG1608 Type	
Status	PROD (Recommendation is available)(Recommended Alternate Part Number:Please get contact with TDK)	



Size	
Length(L)	1.60mm +/-0.15mm
Width(W)	0.80mm +/-0.15mm
Thickness(T)	0.80mm +/-0.15mm
Recommended Land Pattern (A)	0.60mm Nom.
Recommended Land Pattern (B)	0.80mm Nom.
Recommended Land Pattern (C)	0.80mm Nom.


Electrical Characteristics	
Inductance	4.7nH +/-0.3nH at 100MHz
Rated Current (Temperature Rise) [Max.]	600mA (20degC Rise)
Self-Resonant Frequency [Min.]	5GHz
Self-Resonant Frequency [Typ.]	6.8GHz
Q [Min.]	10 at 100MHz
Q [Typ.]	
DC Resistance [Nom.]	80mΩ
DC Resistance [Max.]	150mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.004g


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

MLG1608B4N7ST000


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

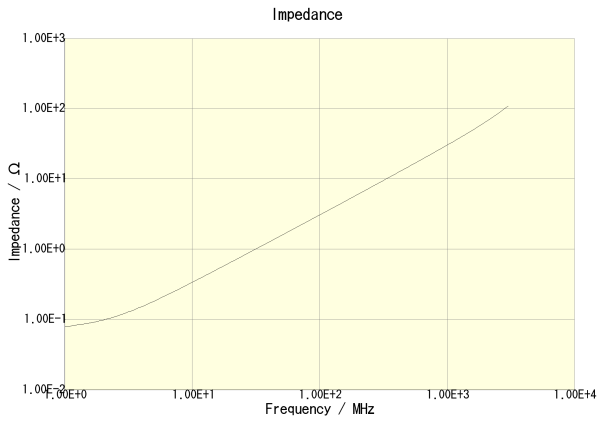


MLG1608B4N7ST000

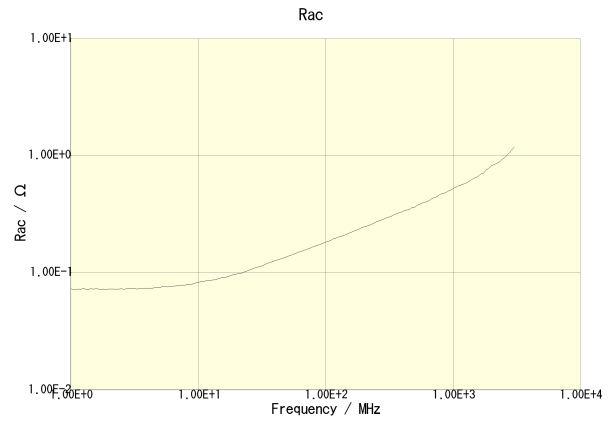

MLG1608B4N7ST000

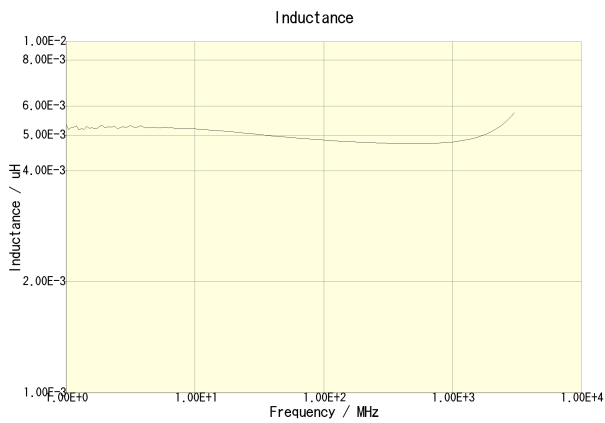

MLG1608B4N7ST000



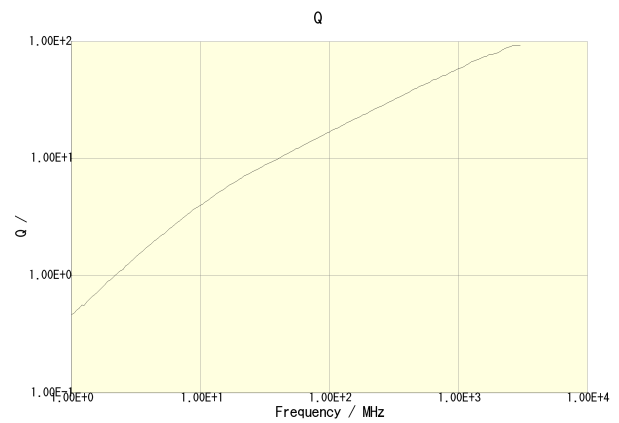


MLG1608B4N7ST000

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

MLG1608B4N7ST000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

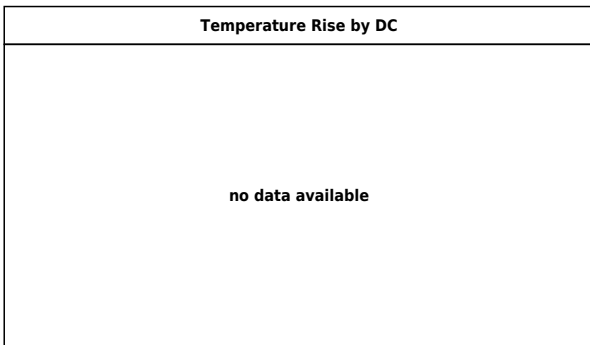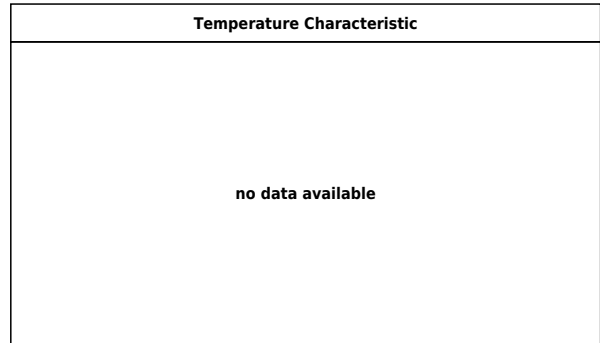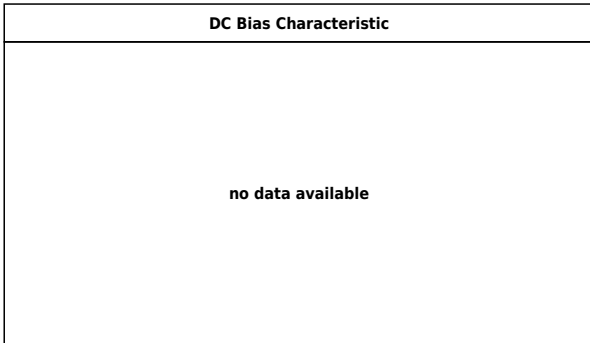

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.