

MLZ2012N3R3LT000

Applications		Commercial Grade
Feature		Multilayer
		Magnetic Shield
		Ferrite Core
Series	MLZ Series / MLZ2012 Type	
Status	Production	



Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	0.85mm +/-0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.


Electrical Characteristics	
Inductance	3.3uH +/-20% at 2MHz
Rated Current (L Change) [Max.]	140mA (50% Down)
Rated Current (Temperature Rise) [Typ.]	750mA (20degC Rise)
Self-Resonant Frequency [Min.]	
DC Resistance [Nom.]	150mΩ
DC Resistance [Max.]	195mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Flow, Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.01g


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

MLZ2012N3R3LT000


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

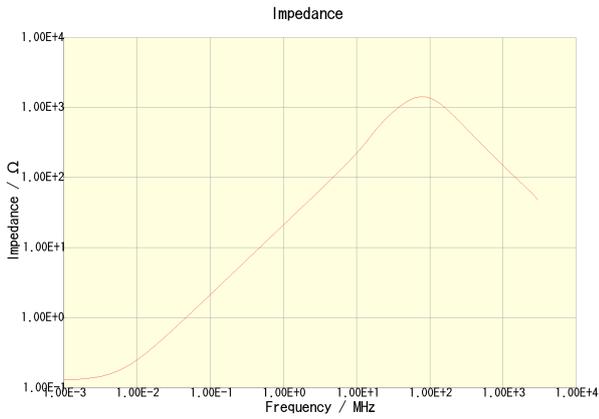


MLZ2012N3R3LT000

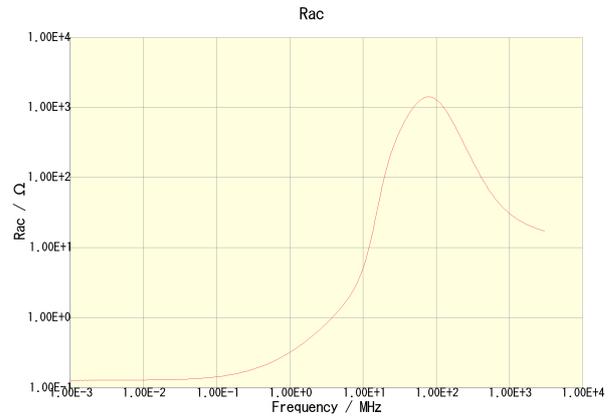

MLZ2012N3R3LT000

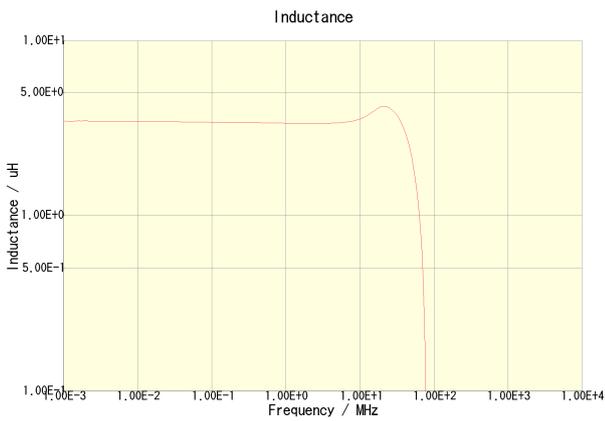

MLZ2012N3R3LT000



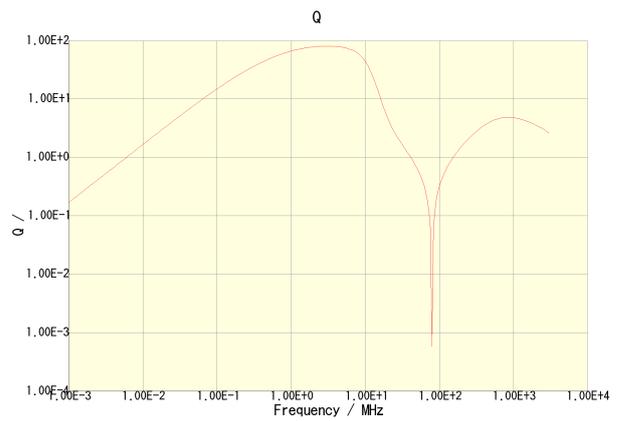


MLZ2012N3R3LT000

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

MLZ2012N3R3LT000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

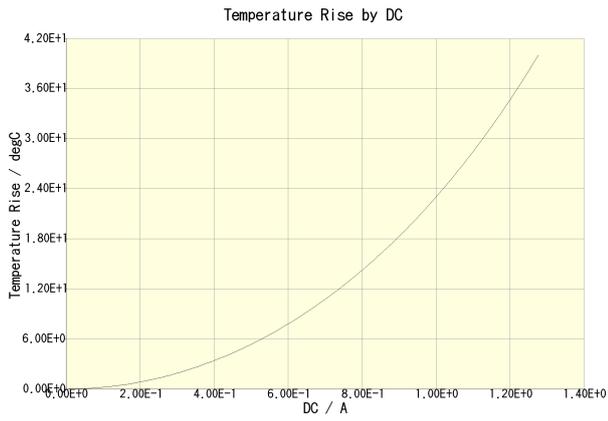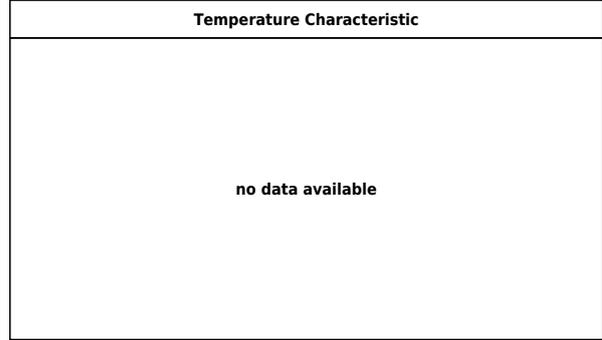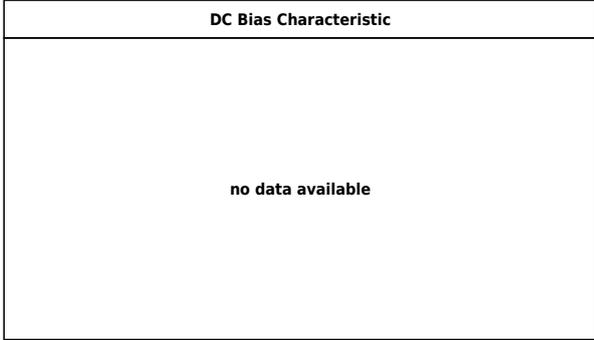

MLZ2012N3R3LT000(Amb. Temp. = 20degc)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.