
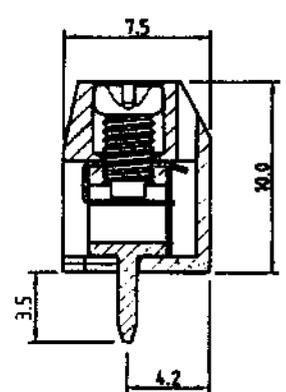
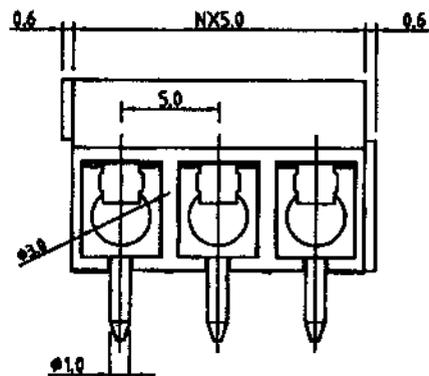


**Ratings:**  
 Current 16A  
 Voltage 250 V  
 Wire Size 14-22AWG  
 Test Voltage 1.5 kV  
 Rated Torque / Screw Size 4kg-cm / M2.6


**Dimensions:**  
 Spacing 5.0mm  
 PCB Hole Diameter 1.3mm

**Materials:**  
 Insulating Material PA  
 Flammability UL94V-0  
 Temperature -33°C/+120°C  
 Block Brass  
 Wire Guard Stainless Steel  
 Screw Steel, Galvanized and Cromated



N=Number of contacts

P.C.B. LAYOUT

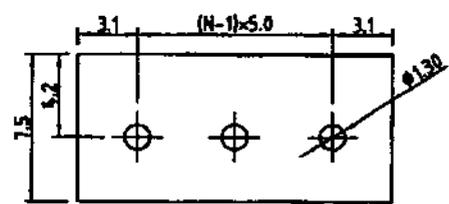

Part Number  
**EDC500/[\*][\*]DS**  
 \* - NUMBER OF POSITIONS

Units  
 mm

Drawing

Reviewed

Approved

Date  
 1/07/02

Sheet 1 of 1

Rev. A