


5-V LOW-DROPOUT VOLTAGE REGULATOR

Check for Samples: [TLE4275-Q1](#)

FEATURES

- Qualified for Automotive Applications
- Output Voltage 5 V $\pm$ 2%
- Very Low Current Consumption
- Power-On and Undervoltage Reset
- Reset Low-Level Output Voltage < 1 V
- Very Low Dropout Voltage
- Short-Circuit Proof
- Reverse-Polarity Proof

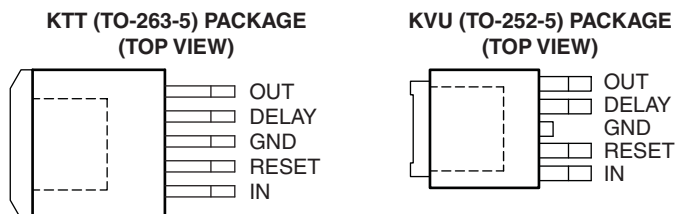

DESCRIPTION/ORDERING INFORMATION

The TLE4275 is a monolithic integrated low-dropout voltage regulator offered in a 5-pin TO package. An input voltage up to 45 V is regulated to $V_{OUT} = 5$ V (typ). The device can drive loads up to 450 mA and is short-circuit proof. At overtemperature, the TLE4275 is turned off by the incorporated temperature protection. A reset signal is generated for an output voltage, $V_{OUT,rt}$, of 4.65 V (typ). The reset delay time can be programmed by the external delay capacitor.

The input capacitor, C_{IN} , compensates for line fluctuation. Using a resistor of approximately 1 Ω , in series with C_{IN} , dampens the oscillation of input inductivity and input capacitance. The output capacitor, C_{OUT} , stabilizes the regulation circuit. Stability is specified at $C_{OUT} \geq 22$ μ F and $ESR \leq 5$ Ω , within the operating temperature range.

The control amplifier compares a reference voltage to a voltage that is proportional to the output voltage and drives the base of the series transistor via a buffer. Saturation control as a function of the load current prevents any oversaturation of the power element. The device also incorporates a number of internal circuits for protection against:

- Overload
- Overtemperature
- Reverse polarity

ORDERING INFORMATION⁽¹⁾

T_J	PACKAGE ⁽²⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 150°C	TO-252 (DPAK) – KVU	Reel of 2500	TLE4275QKVURQ1	TLE4275Q
	TO-263 – KTT	Reel of 500	TLE4275QKTTRQ1	TLE4275Q

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.


(2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TERMINAL FUNCTIONS

NO.	NAME	DESCRIPTION
1	IN	Input. Connect to ground as close to device as possible, through a ceramic capacitor.
2	RESET	Reset output. Open-collector output.
3	GND	Ground. Internally connected to heatsink.
4	DELAY	Reset delay. Connect to ground with a capacitor to set delay time.
5	OUT	Output. Connect to ground with $\geq 22\text{-}\mu\text{F}$ capacitor, ESR $< 5\ \Omega$ at 10 kHz.

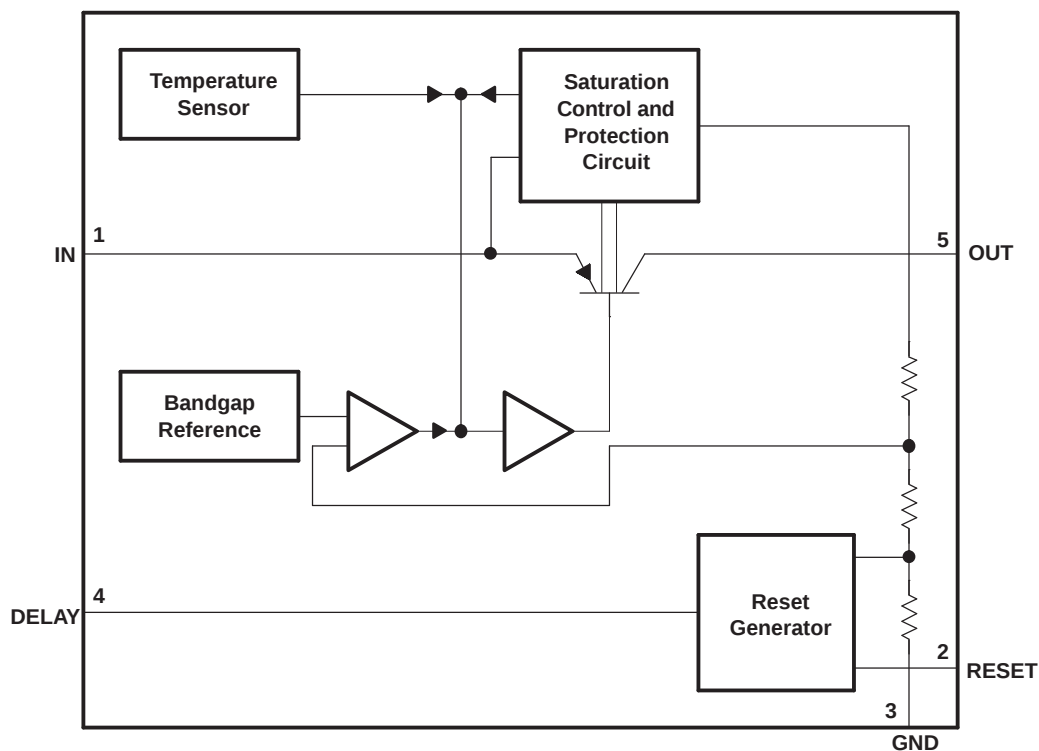FUNCTIONAL BLOCK DIAGRAM

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _I	Input voltage range ⁽²⁾	IN	–42	45	V
		DELAY	–0.3	7	
V _O	Output voltage range	OUT	–1	16	V
		RESET	–0.3	25	
I _I	Input current	DELAY		±2	mA
I _O	Output current	RESET		±5	mA
θ _{JA}	Package thermal impedance, junction to free air ^{(3) (4)}	KTT package		26.5	°C/W
		KVU package		38.6	
T _J	Operating junction temperature range		–40	150	°C
T _{stg}	Storage temperature range		–65	150	°C
ESD	Electrostatic discharge rating	Human-body model (HBM) ⁽⁵⁾		6000	V
		Machine model (MM) ⁽⁶⁾		400	

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to the network ground terminal.
- (3) Maximum power dissipation is a function of T_J(max), θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is P_D = (T_J(max) – T_A)/θ_{JA}. Operating at the absolute maximum T_J of 150°C can affect reliability.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.
- (5) HBM ESD rating tested per JESD22-A114.
- (6) MM ESD rating tested per JESD22-A115.

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V _I	Input voltage	5.5	42	V
T _J	Junction temperature	–40	150	°C

ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range, $V_I = 13.5\text{ V}$, $T_J = -40^\circ\text{C}$ to 150°C (unless otherwise noted) (see [Figure 1](#))

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V _O	Output voltage	I _O = 5 mA to 400 mA, V _I = 6 V to 28 V		4.9	5	5.1	V
		I _O = 5 mA to 200 mA, V _I = 6 V to 40 V		4.9	5	5.1	
I _O	Output current limit			450	700	950	mA
I _q	Current consumption I _q = I _I - I _O	I _O = 1 mA	T _J = 25°C		150	200	μA
			T _J ≤ 85°C		150	220	
		I _O = 250 mA			5	10	mA
		I _O = 400 mA			12	22	
V _{DO}	Dropout voltage ⁽¹⁾	I _O = 300 mA, V _{do} = V _I - V _O			250	500	mV
	Load regulation	I _O = 5 mA to 400 mA			15	30	mV
	Line regulation	ΔV _I = 8 V to 32 V, I _O = 5 mA		-15	5	15	mV
PSRR	Power-supply ripple rejection	f _r = 100 Hz, V _r = 0.5 V _{pp}			60		dB
$\frac{\Delta V_O}{\Delta T}$	Temperature output-voltage drift				0.5		mV/K
V _{O,rt}	RESET switching threshold			4.5	4.65	4.8	V
V _{ROL}	RESET output low voltage	R _{ext} ≥ 5 kΩ, V _O > 1 V			0.2	0.4	V
I _{ROH}	RESET output leakage current	V _{ROH} = 5 V			0	10	μA
I _{D,c}	RESET charging current	V _D = 1 V		3	5.5	9	μA
V _{DU}	RESET upper timing threshold			1.5	1.8	2.2	V
V _{DRL}	RESET lower timing threshold			0.2	0.4	0.7	V

(1) Measured when the output voltage V_O has dropped 100 mV from the nominal value obtained at $V_I = 13.5\text{ V}$


SWITCHING CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted) (see [Figure 2](#))


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{rd}	RESET delay time	$C_D = 47\text{ nF}$	10	16	22	ms
t_{rr}	RESET reaction time	$C_D = 47\text{ nF}$		0.5	2	μs

TYPICAL CHARACTERISTICS


OUTPUT VOLTAGE
vs
JUNCTION TEMPERATURE

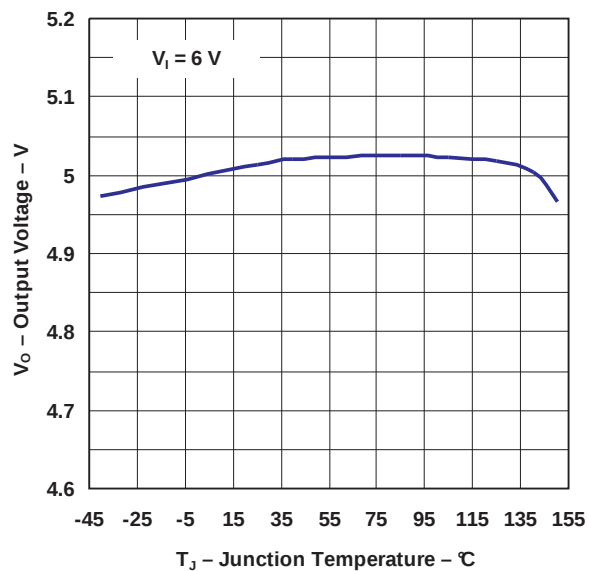


OUTPUT VOLTAGE
vs
JUNCTION TEMPERATURE

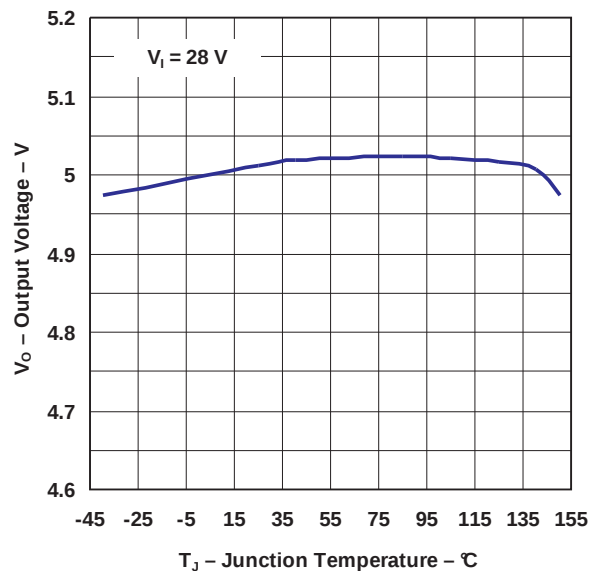

OUTPUT VOLTAGE
vs
INPUT VOLTAGE

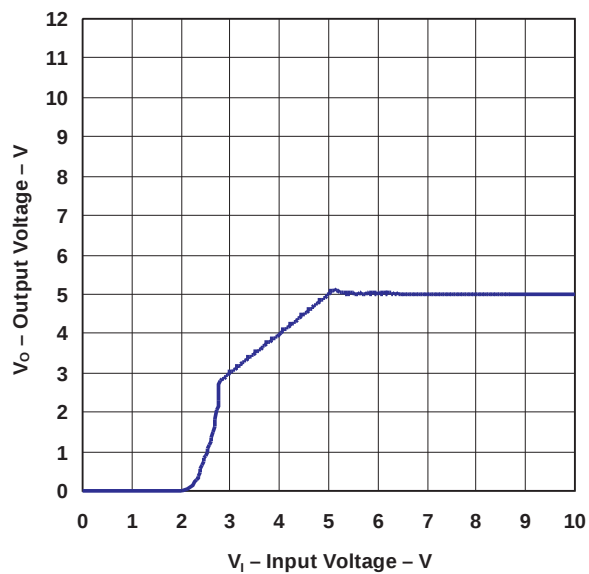


OUTPUT CURRENT
vs
JUNCTION TEMPERATURE

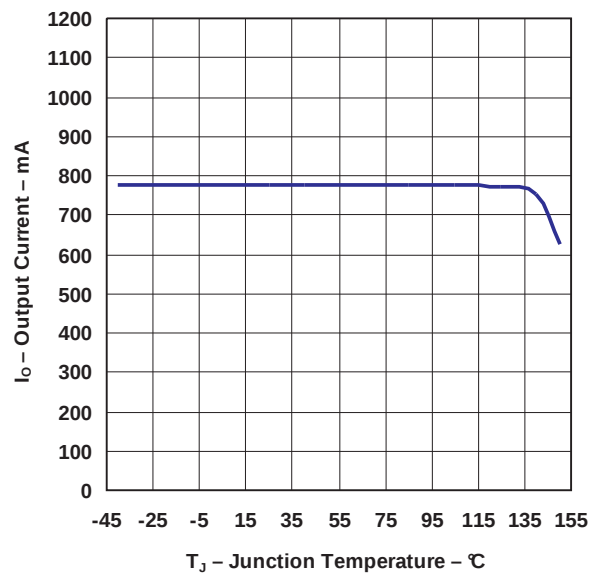


TYPICAL CHARACTERISTICS (continued)


**CURRENT CONSUMPTION
vs
OUTPUT CURRENT**

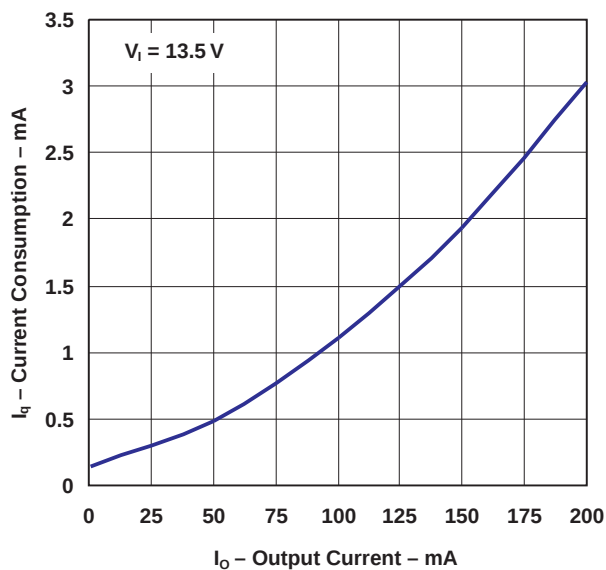


**CURRENT CONSUMPTION
vs
OUTPUT CURRENT**

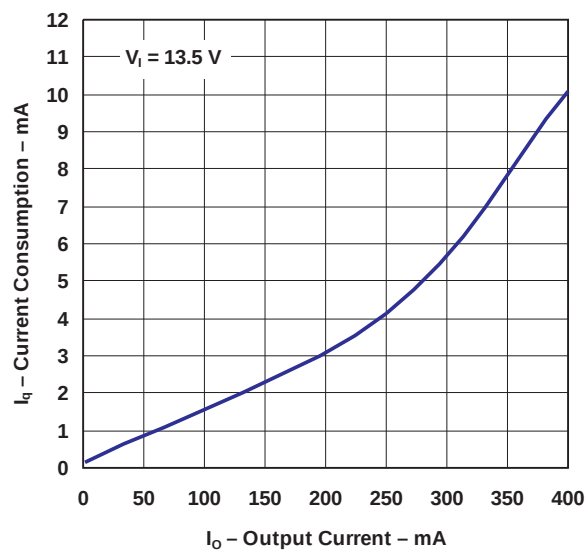

**DROPOUT VOLTAGE
vs
OUTPUT CURRENT**

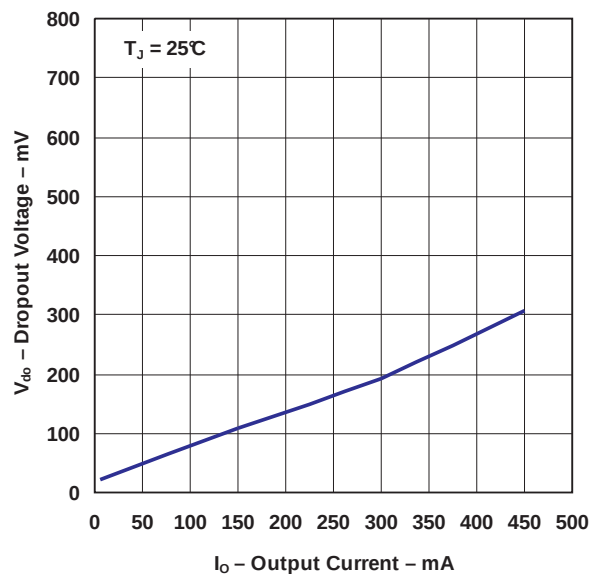


**CHARGE CURRENT
vs
JUNCTION TEMPERATURE**

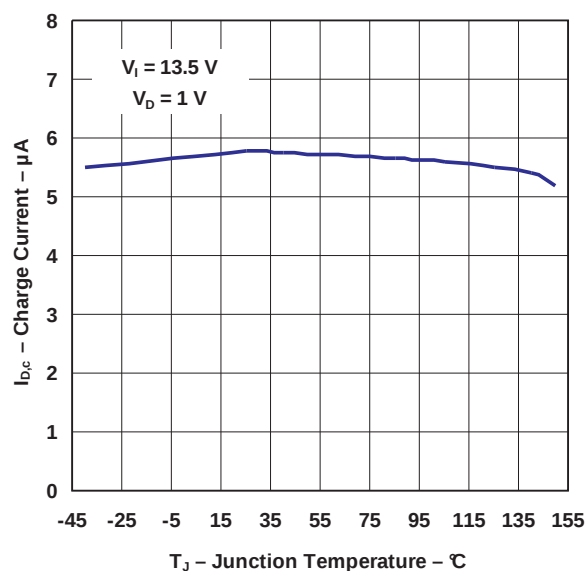


TYPICAL CHARACTERISTICS (continued)


**DELAY SWITCHING THRESHOLD
vs
JUNCTION TEMPERATURE**

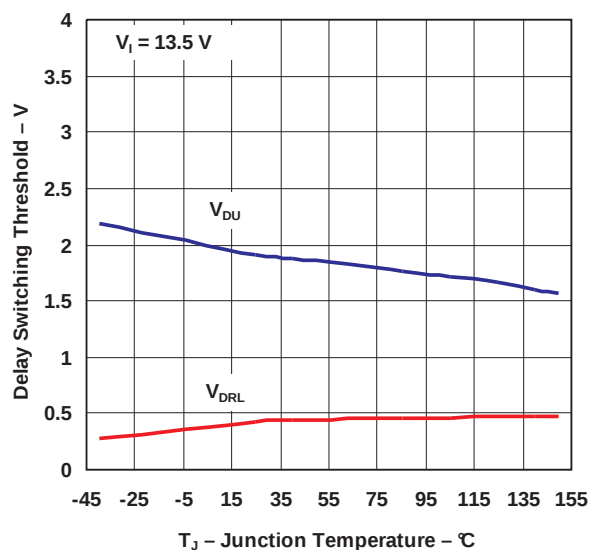


**POWER-SUPPLY RIPPLE REJECTION
vs
FREQUENCY**

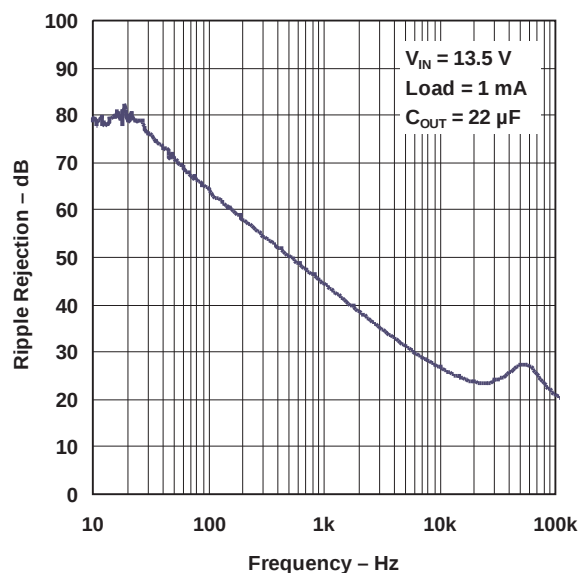

**POWER-SUPPLY RIPPLE REJECTION
vs
FREQUENCY**

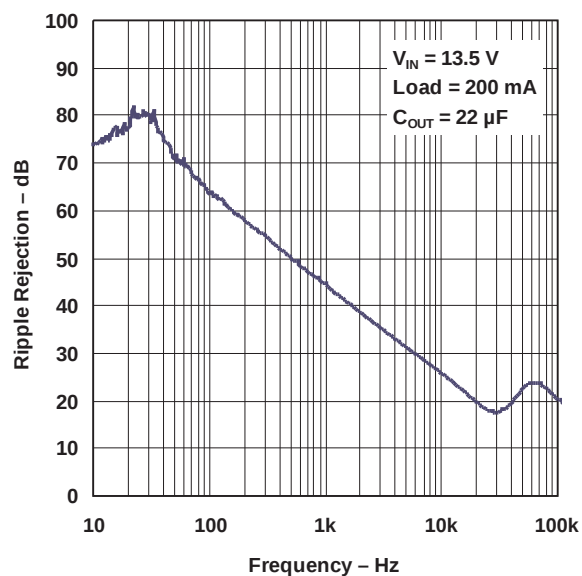


**POWER-SUPPLY RIPPLE REJECTION
vs
FREQUENCY**

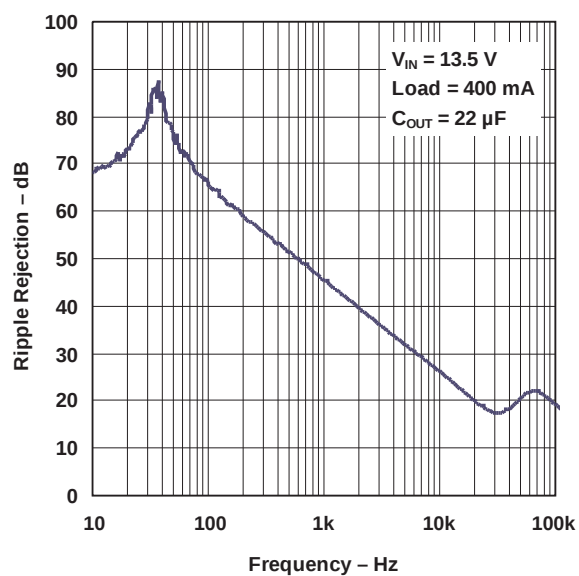


TYPICAL CHARACTERISTICS (continued)

THERMAL RESISTANCE
vs
COPPER LAND PAD AREA
(JEDEC 51-3 Low-K Board)

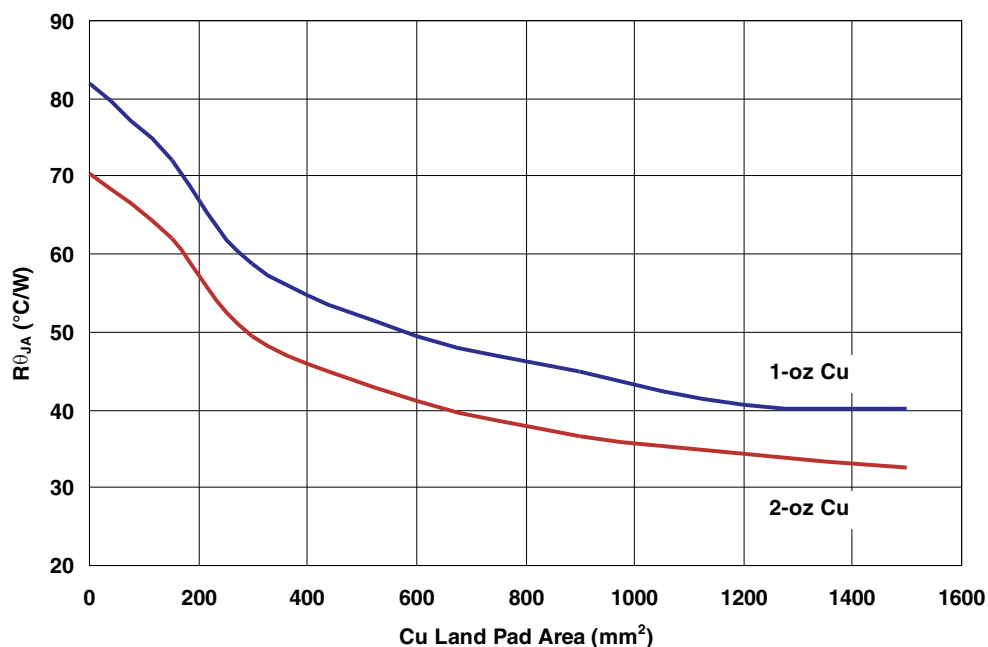


THERMAL RESISTANCE
vs
PULSE WIDTH TIME
FOR VARIOUS DUTY CYCLES

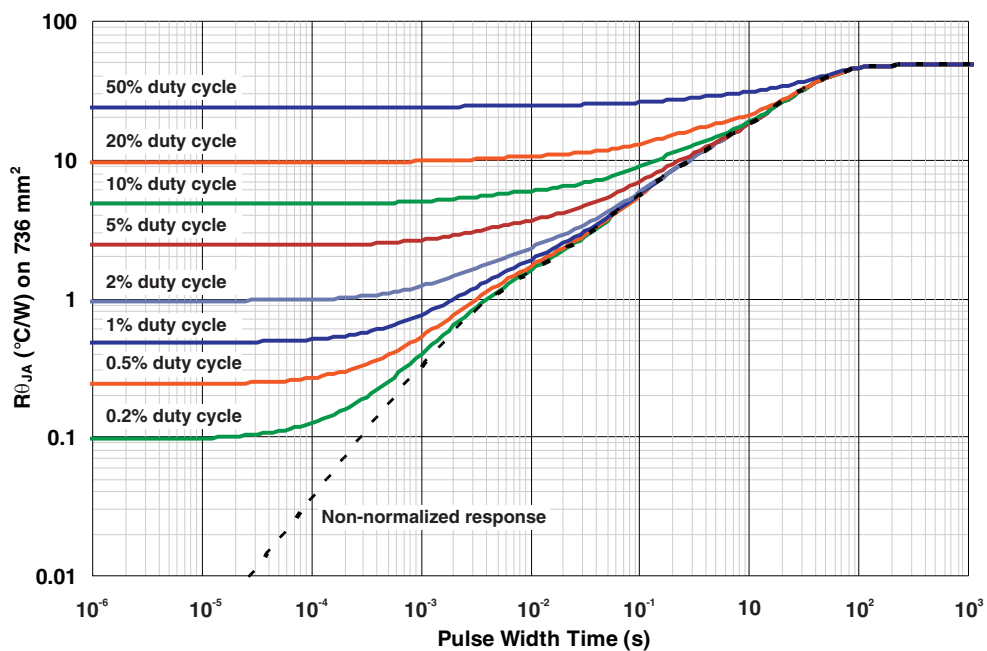


TYPICAL CHARACTERISTICS (continued)

ESR STABILITY
vs
LOAD CURRENT

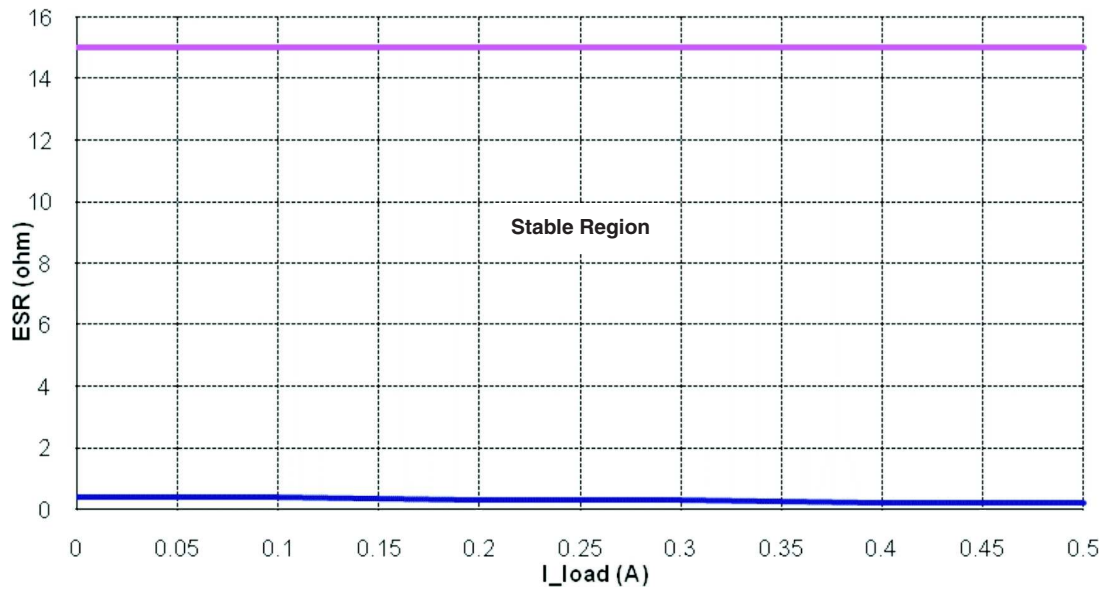

ESR STABILITY
vs
LOAD CAPACITANCE

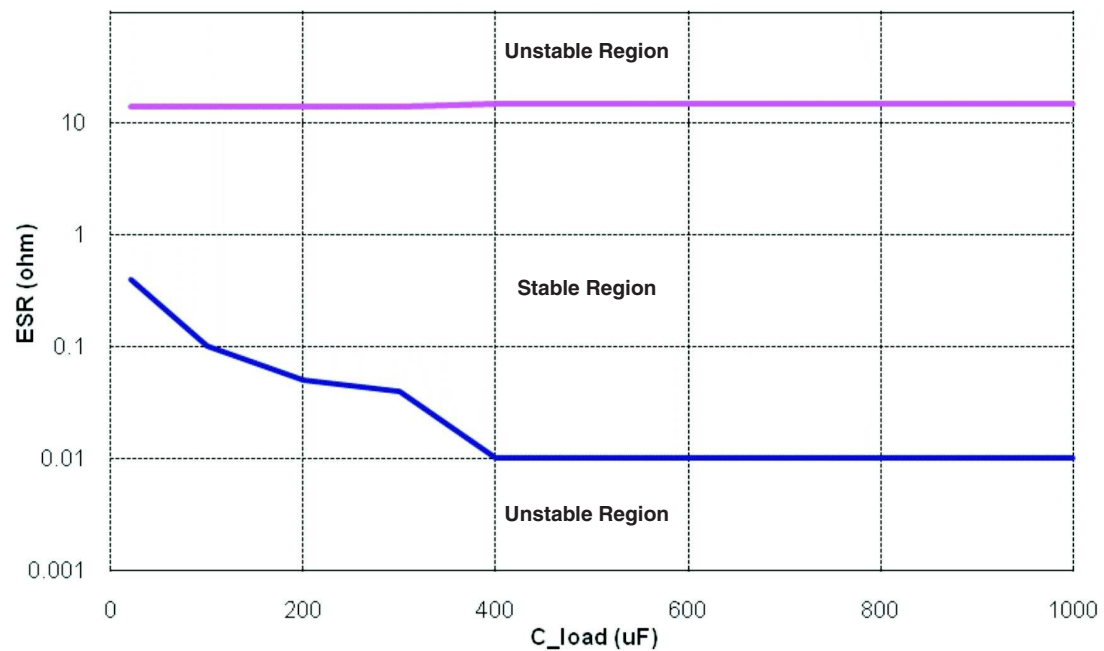

PARAMETER MEASUREMENT INFORMATION

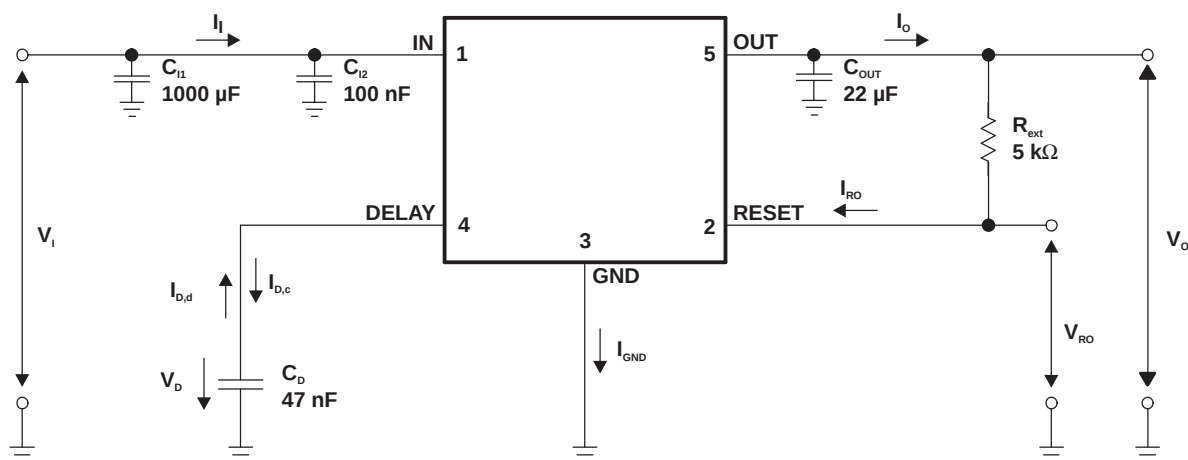


Figure 1. Test Circuit

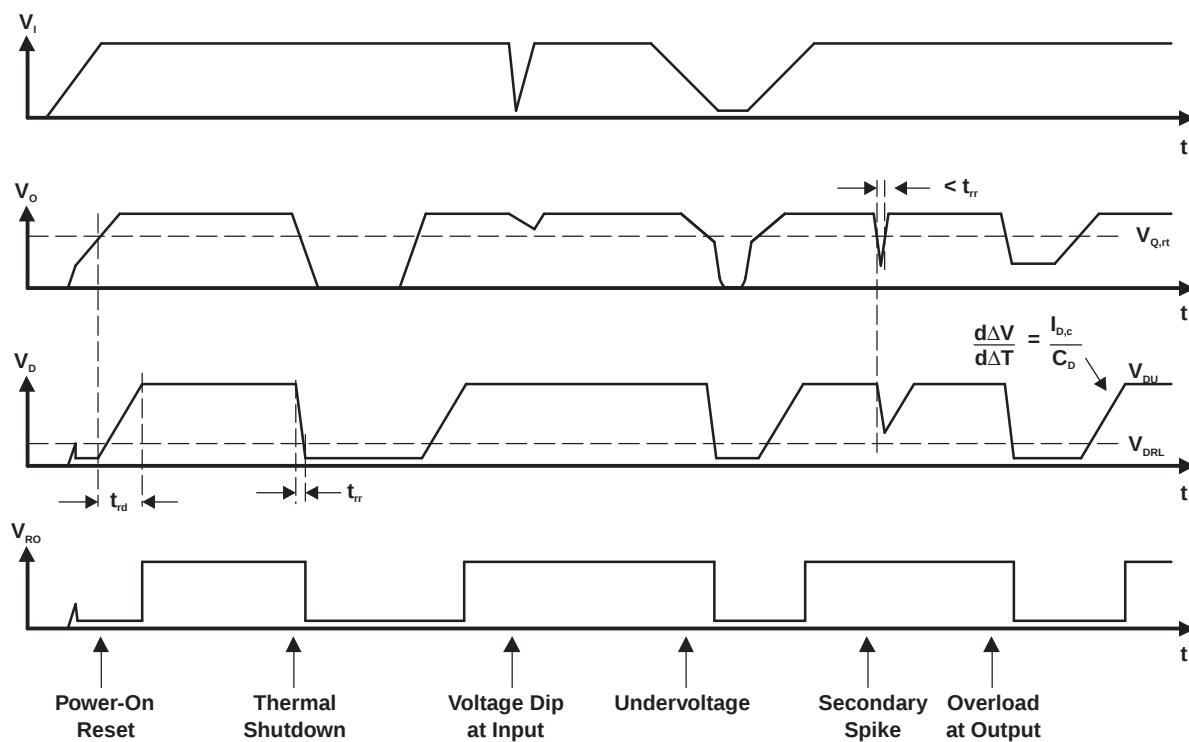


Figure 2. Reset Timing

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/ Ball Finish	MSL Peak Temp ⁽³⁾	Samples (Requires Login)
TLE4275QKTTTRQ1	ACTIVE	DDPAK/ TO-263	KTT	5	500	Green (RoHS & no Sb/Br)	CU SN	Level-3-245C-168 HR	Request Free Samples
TLE4275QKVURQ1	ACTIVE	PFM	KVU	5	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	Request Free Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLE4275QKTTRQ1	DDPAK/TO-263	KTT	5	500	330.0	24.4	10.6	15.8	4.9	16.0	24.0	Q2
TLE4275QKVURQ1	PFM	KVU	5	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLE4275QKTTRQ1	DDPAK/TO-263	KTT	5	500	340.0	340.0	38.0
TLE4275QKVURQ1	PFM	KVU	5	2500	340.0	340.0	38.0

KTT (R-PSFM-G5)

PLASTIC FLANGE-MOUNT PACKAGE

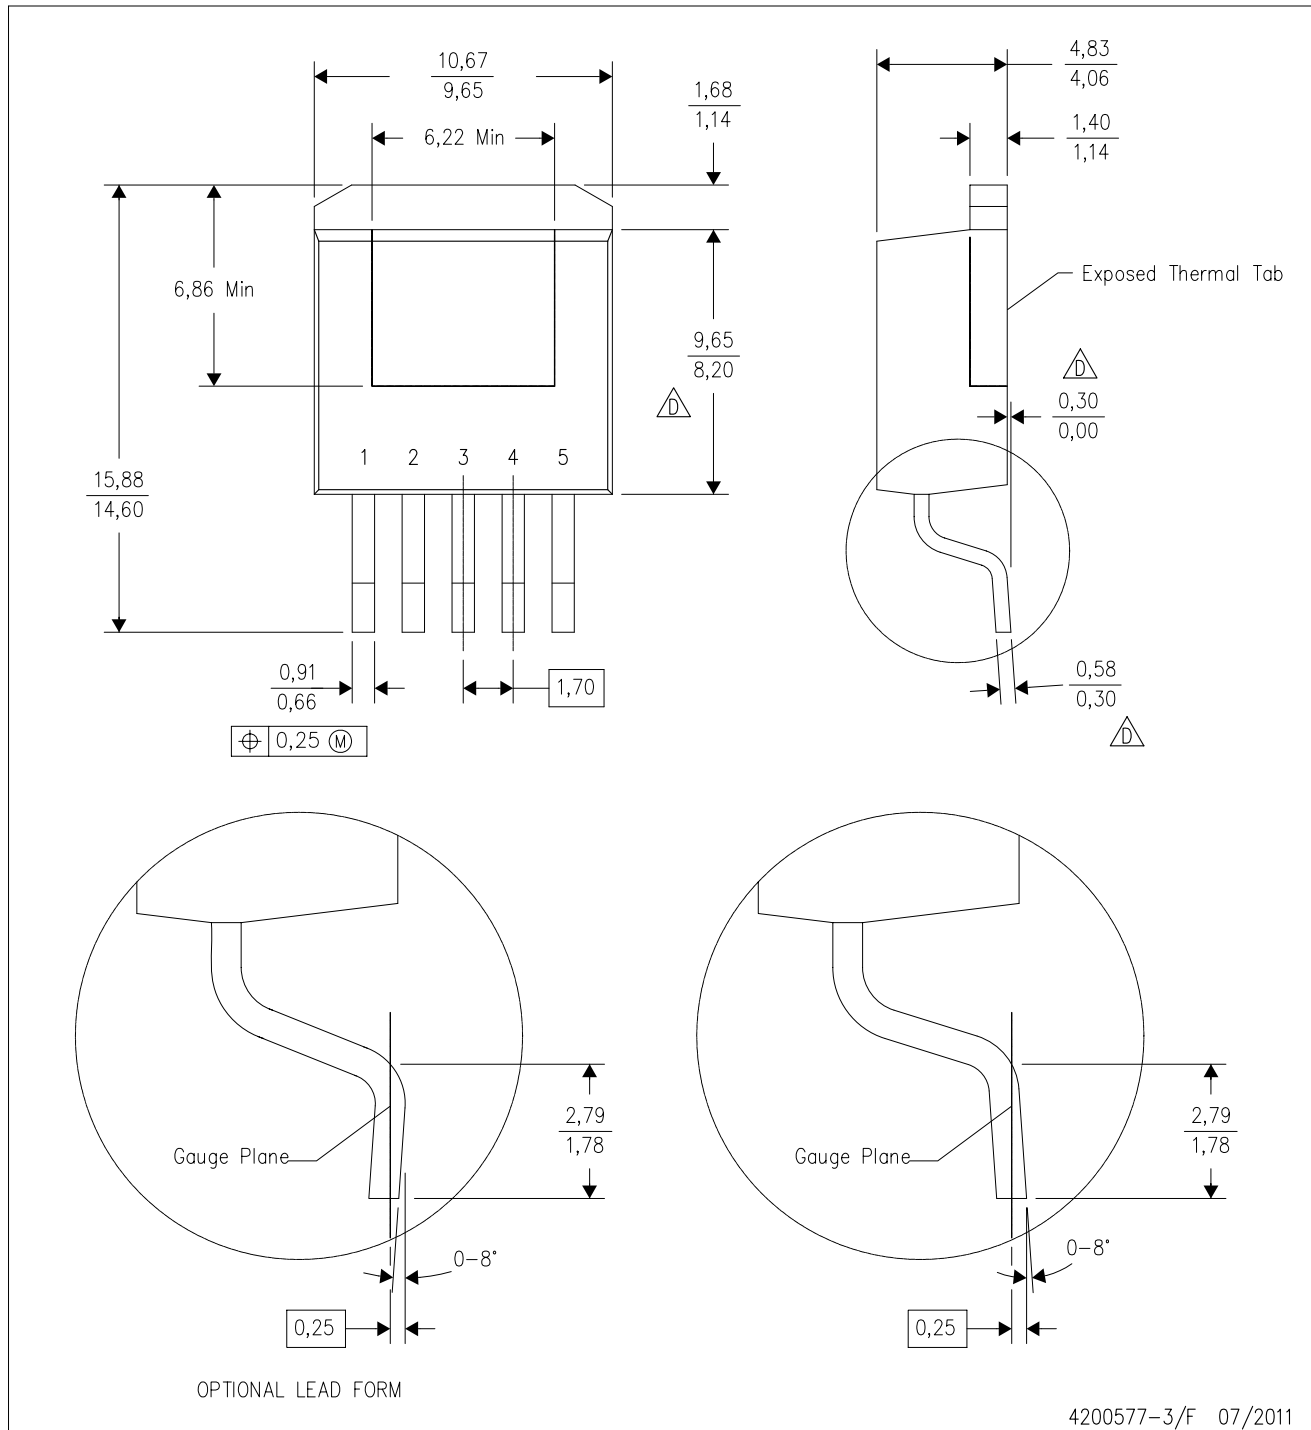


4200577-3/F 07/2011

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion. Mold flash or protrusion not to exceed 0.005 (0,13) per side.
- Falls within JEDEC TO-263 variation BA, except minimum lead thickness, maximum seating height, and minimum body length.

KVU (R-PSFM-G5)

PLASTIC FLANGE-MOUNT PACKAGE

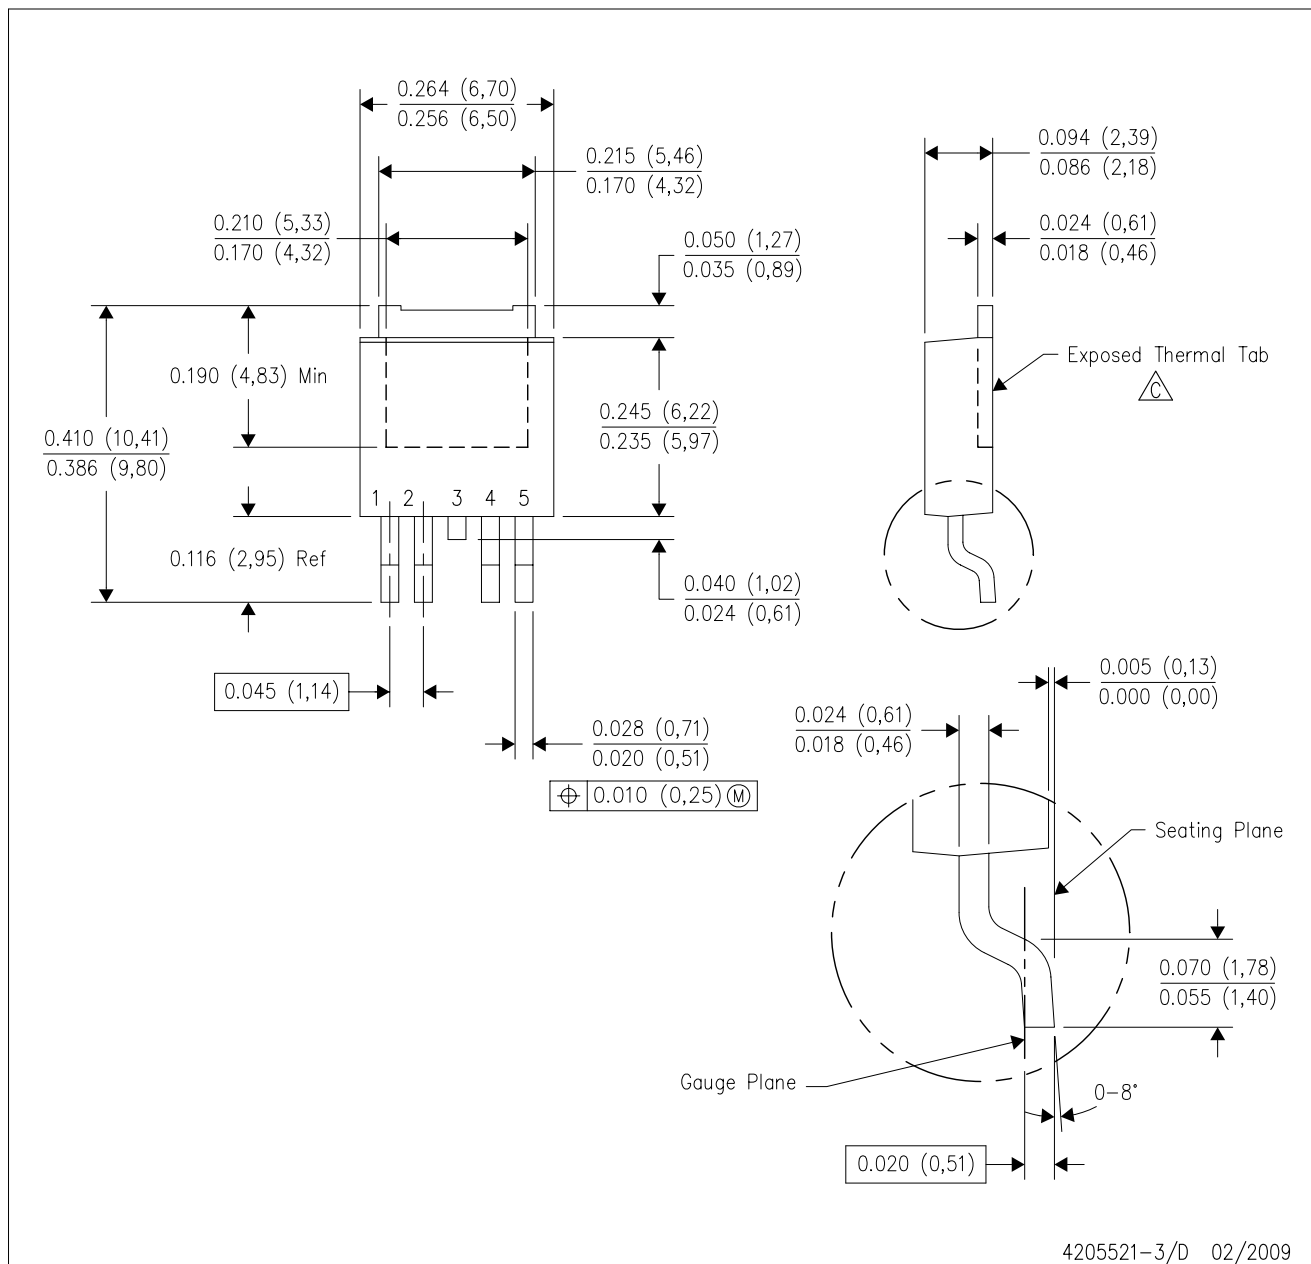

4205521-3/D 02/2009

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. The center lead is in electrical contact with the exposed thermal tab.
- D. Body Dimensions do not include mold flash or protrusions. Mold flash and protrusion shall not exceed 0.006 (0,15) per side.
- E. Falls within JEDEC TO-252 variation AD.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video
Wireless	www.ti.com/wireless-apps

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated