
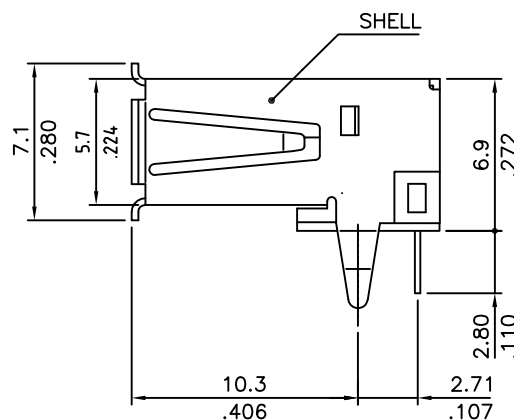
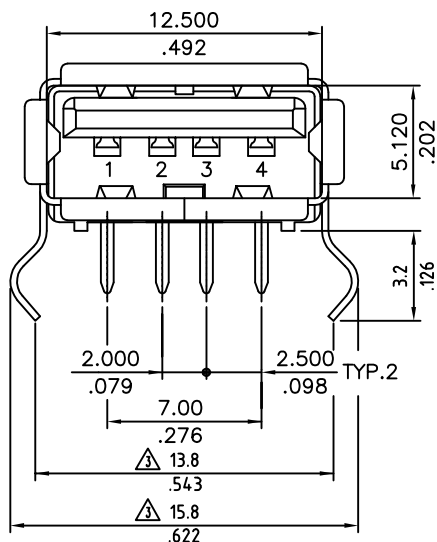


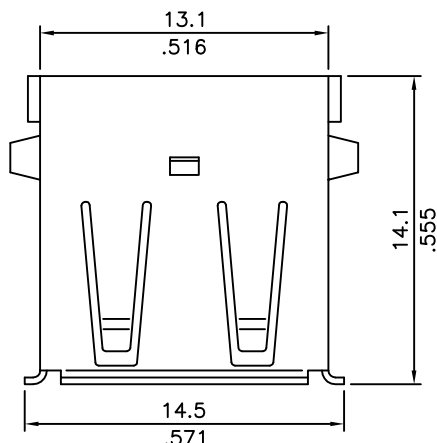

| SIGN | DATE | DESCRIPTION                                    | APPROVER |
|------|------|------------------------------------------------|----------|
|      |      | THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |          |


#### Material

- Insulator: Glass Filled Polyester
- Flammability: UL94V-0
- Contacts: Phosphor Bronze
- Contact Plating: See options
- Shell: Brass
- Shell Plating: 80 Ni over 40u" Cu

#### Ratings

- Current: 1A
- Voltage: 30V AC(r.m.s.)
- Contact Res: <30mΩ
- Insulation Res: >1,000 MΩ
- Operating Temp: 0° - +85°
- Storage Temp: -40° - +60°

RoHS Compliant

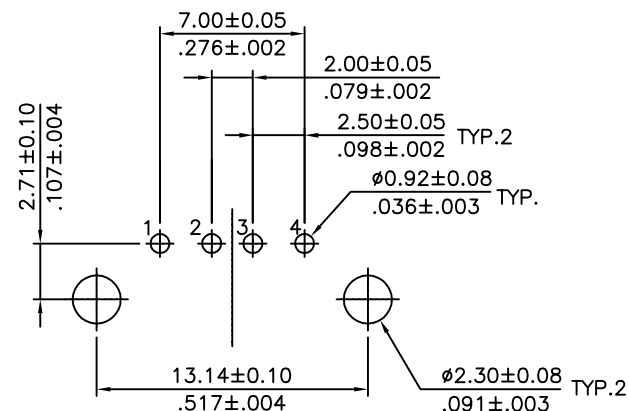

Recommended P.C. Board Layout

PART NUMBER:

USB-A1HSXX

COLOR:  
B: Black  
W: White

PLATING:  
6: Selective Gold Flash  
(Std.)  
8: Selective 30u" Gold

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



| TITLE    | USB - A type, Horizontal, thru hole |                      |                      |                   |
|----------|-------------------------------------|----------------------|----------------------|-------------------|
| PART NO. | USB-A1HSXX                          |                      | DWG NO.              | USB-A1HSXX.DWG    |
| APPROVED | CHECKED                             | DESIGNED             | DRAWN                | 4050              |
|          | Marvin<br>2002.03.12                | Marvin<br>2002.03.12 | Marvin<br>2002.03.12 |                   |
|          |                                     |                      |                      | Tolerance         |
|          |                                     |                      |                      | UNIT: mm/inches   |
|          |                                     |                      |                      | SCALE: NONE       |
|          |                                     |                      |                      | X.X ±1°           |
|          |                                     |                      |                      | X.XX ±0.30/.012   |
|          |                                     |                      |                      | X.XXX ±0.20/.008  |
|          |                                     |                      |                      | X.XXXX ±0.10/.004 |

SHEET: 01/01

REV: A