
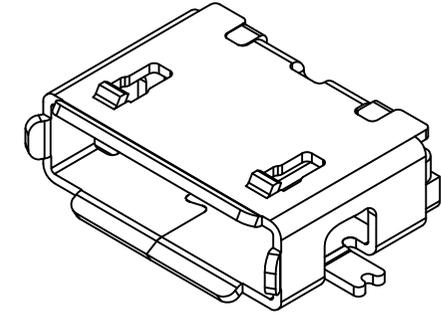
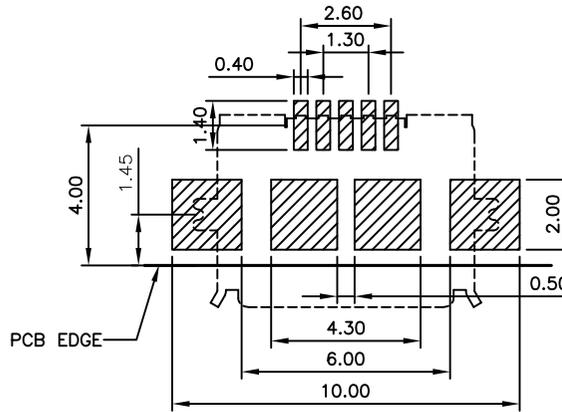


Designed to comply with physical, electrical and environmental requirements of Micro USB Standard (USB2.0), A/B types support USB On-The-Go (OTG) interface.

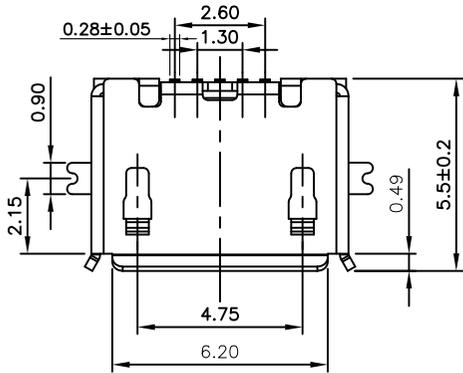

Specifications 规格:

Materials 材料:

Plastic Housing 塑胶外壳: LCP, UL94V-0, Black, LCP, UL94V-0 黑色
 Contact Terminal 接触端子: Copper Alloy 铜合金
 Metallic Shell 金属外壳: Stainless Steel 不锈钢 SUS 304 T = 0.25mm

Plating 电镀:

Underplating 底层电镀: 50µ" Nickel, 50µ" 镍
 Finish 表面处理: Contact Area 接触面积: 30µ" Gold plating, 30µ" 镀金
 Solder Tails 焊接末端: Gold Flash 镀金
 Metallic Shell 金属外壳: Matte Tin 雾锡

Electrical 电气规格:

Voltage Rating 电压额定值: 100 V AC
 Current Rating 电流额定值: Signal(Pins 2,3,4)信号: 1.0 A
 Power (Pins 1,5)电源: 1.8A.
 Operating Temperature 工作温度: -30°C to +85°C
 Contact Resistance 接触电阻值: 30mΩ Max.
 Insulating Resistance 绝缘电阻值: 1000MΩ Min.
 Dielectric Withstand Voltage 耐电压: 500V AC/Minute




Mechanical 机械性规格:

Mating Force 插入力: 35N Max.
 Unmating Force 拔出力: 10N Min.
 Durability 耐久性: 10,000 Cycles 次插拔

RECOMMENDED P.C.B LAYOUT
 GENERAL TOLERANCE: ±0.05

AS VIEWED FROM COMPONENT SIDE

- Solder Area
- Component Outline

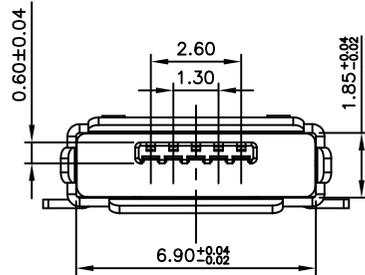

Ordering Grid



Contact Plating
 30 = 30µ" Gold

Packing Options
 A = Tape & Reel
 (1.5K per Reel)

By	SA	CM	AJO	AJO
DETAIL	DRAWING RELEASE	DRAWING UPDATE	SPECIFICATION CHANGES	PACKING CHANGE
REV	A	B	C	D
DATE	04/04/11	26/10/11	06/07/12	17/09/12




Tolerances (Except as noted)		Part Number:-	Date:-
Dimensions in mm		USB3085	04 APR 11
X.X ± 0.3	X.X* ± 2°	Description:-	
X.XX ± 0.20	X.XX* ± 1°	µ USB RECEPTACLE, TYPE AB, SURFACE MOUNT, HORIZONTAL, BOTTOM MOUNT, WITHOUT PEG	
X.XXX ± 0.10	X.XXX* ± 0.5°	© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	
Third Angle Projection		Scale	Revision
		NTS	D
		Material	Drawn by
		See Note	SA
		E & OE	Sheet No.
			1/2

GCT





www.globalconnectortechonlogy.com

Global Connector Technology Ltd. - USB3085: Micro USB Receptacle, Type AB, Surface Mount, Horizontal, Bottom Mount (Standard), without Peg

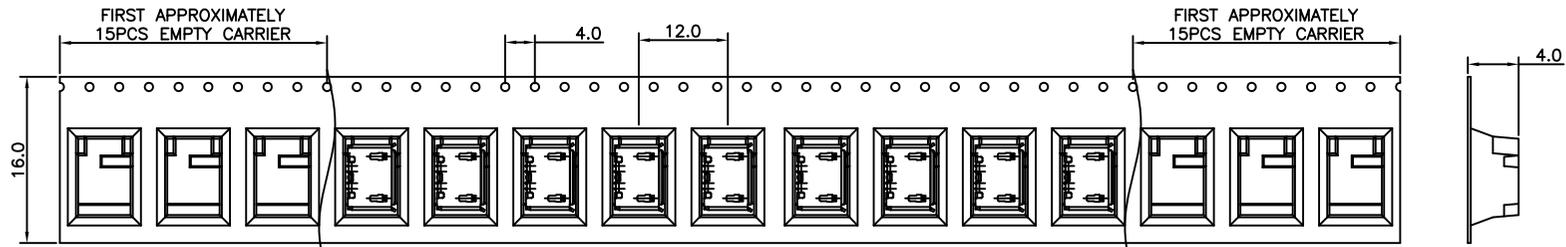

Products P/N	PCS/Reel	Reels/Carton	PCS/Carton
USB3085-30-A	1500	4	6000

- Notes 注意:
1. Peeling off force of top tape: 0.1-1.3N
 2. Part Conforms to EIA-481-C Standards 产品符合EIA-481-C标准
 3. All dimensions in millimeters 所有尺寸均是毫米
 4. 10 sprocket hole pitch cumulative tolerance±0.2mm

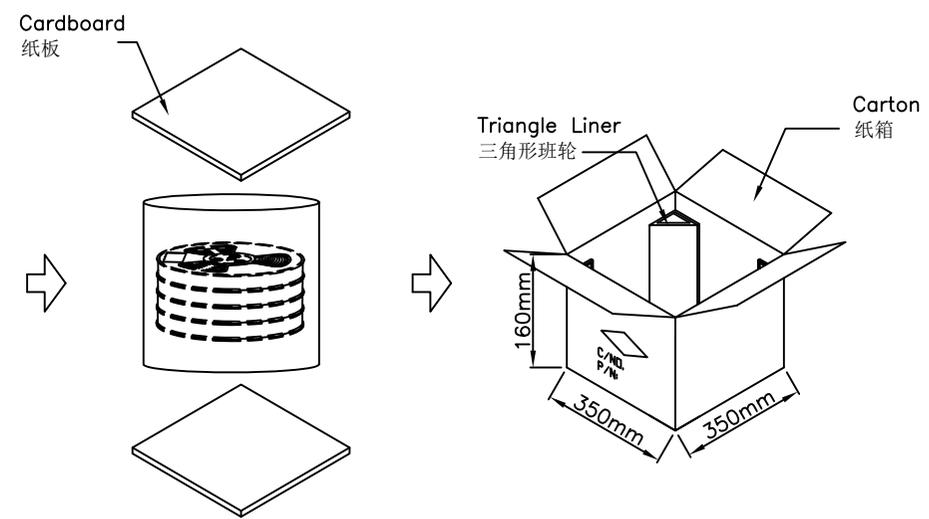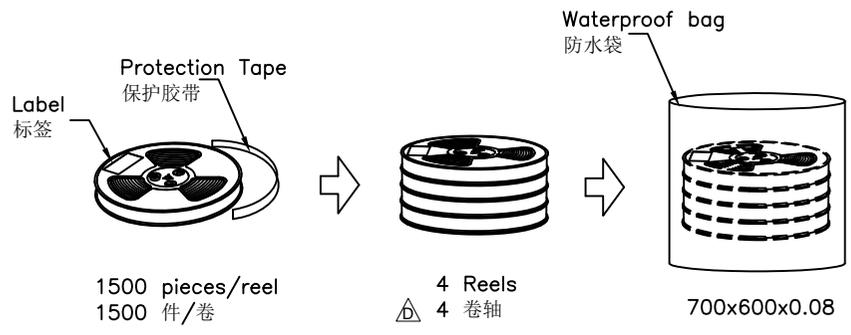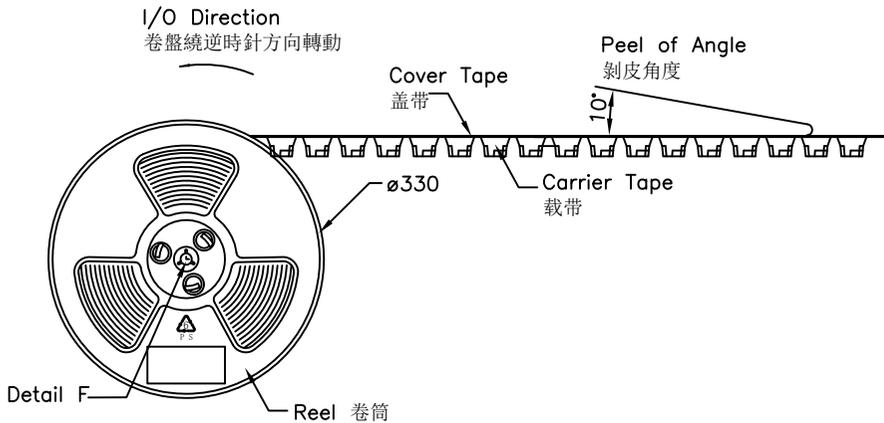

By	SA	CM	AJO	AJO
DETAIL	DRAWING RELEASE	DRAWING UPDATE	SPECIFICATION CHANGES	PACKING CHANGE
REV	A	B	C	D
DATE	04/04/11	26/10/11	06/07/12	17/09/12



Tolerances (Except as noted)	Part Number:-	Date:-
Dimensions in mm	USB3085	04 APR 11
	Description:-	
	μ USB RECEPTACLE, TYPE AB, SURFACE MOUNT, HORIZONTAL, BOTTOM MOUNT, WITHOUT PEG	
Third Angle Projection	THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	

GCT

www.globalconnectortechology.com

Scale NTS	Revision D	Material See Note	Drawn by SA	Sheet No. 2/2
-----------	------------	-------------------	-------------	---------------