


Oct.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

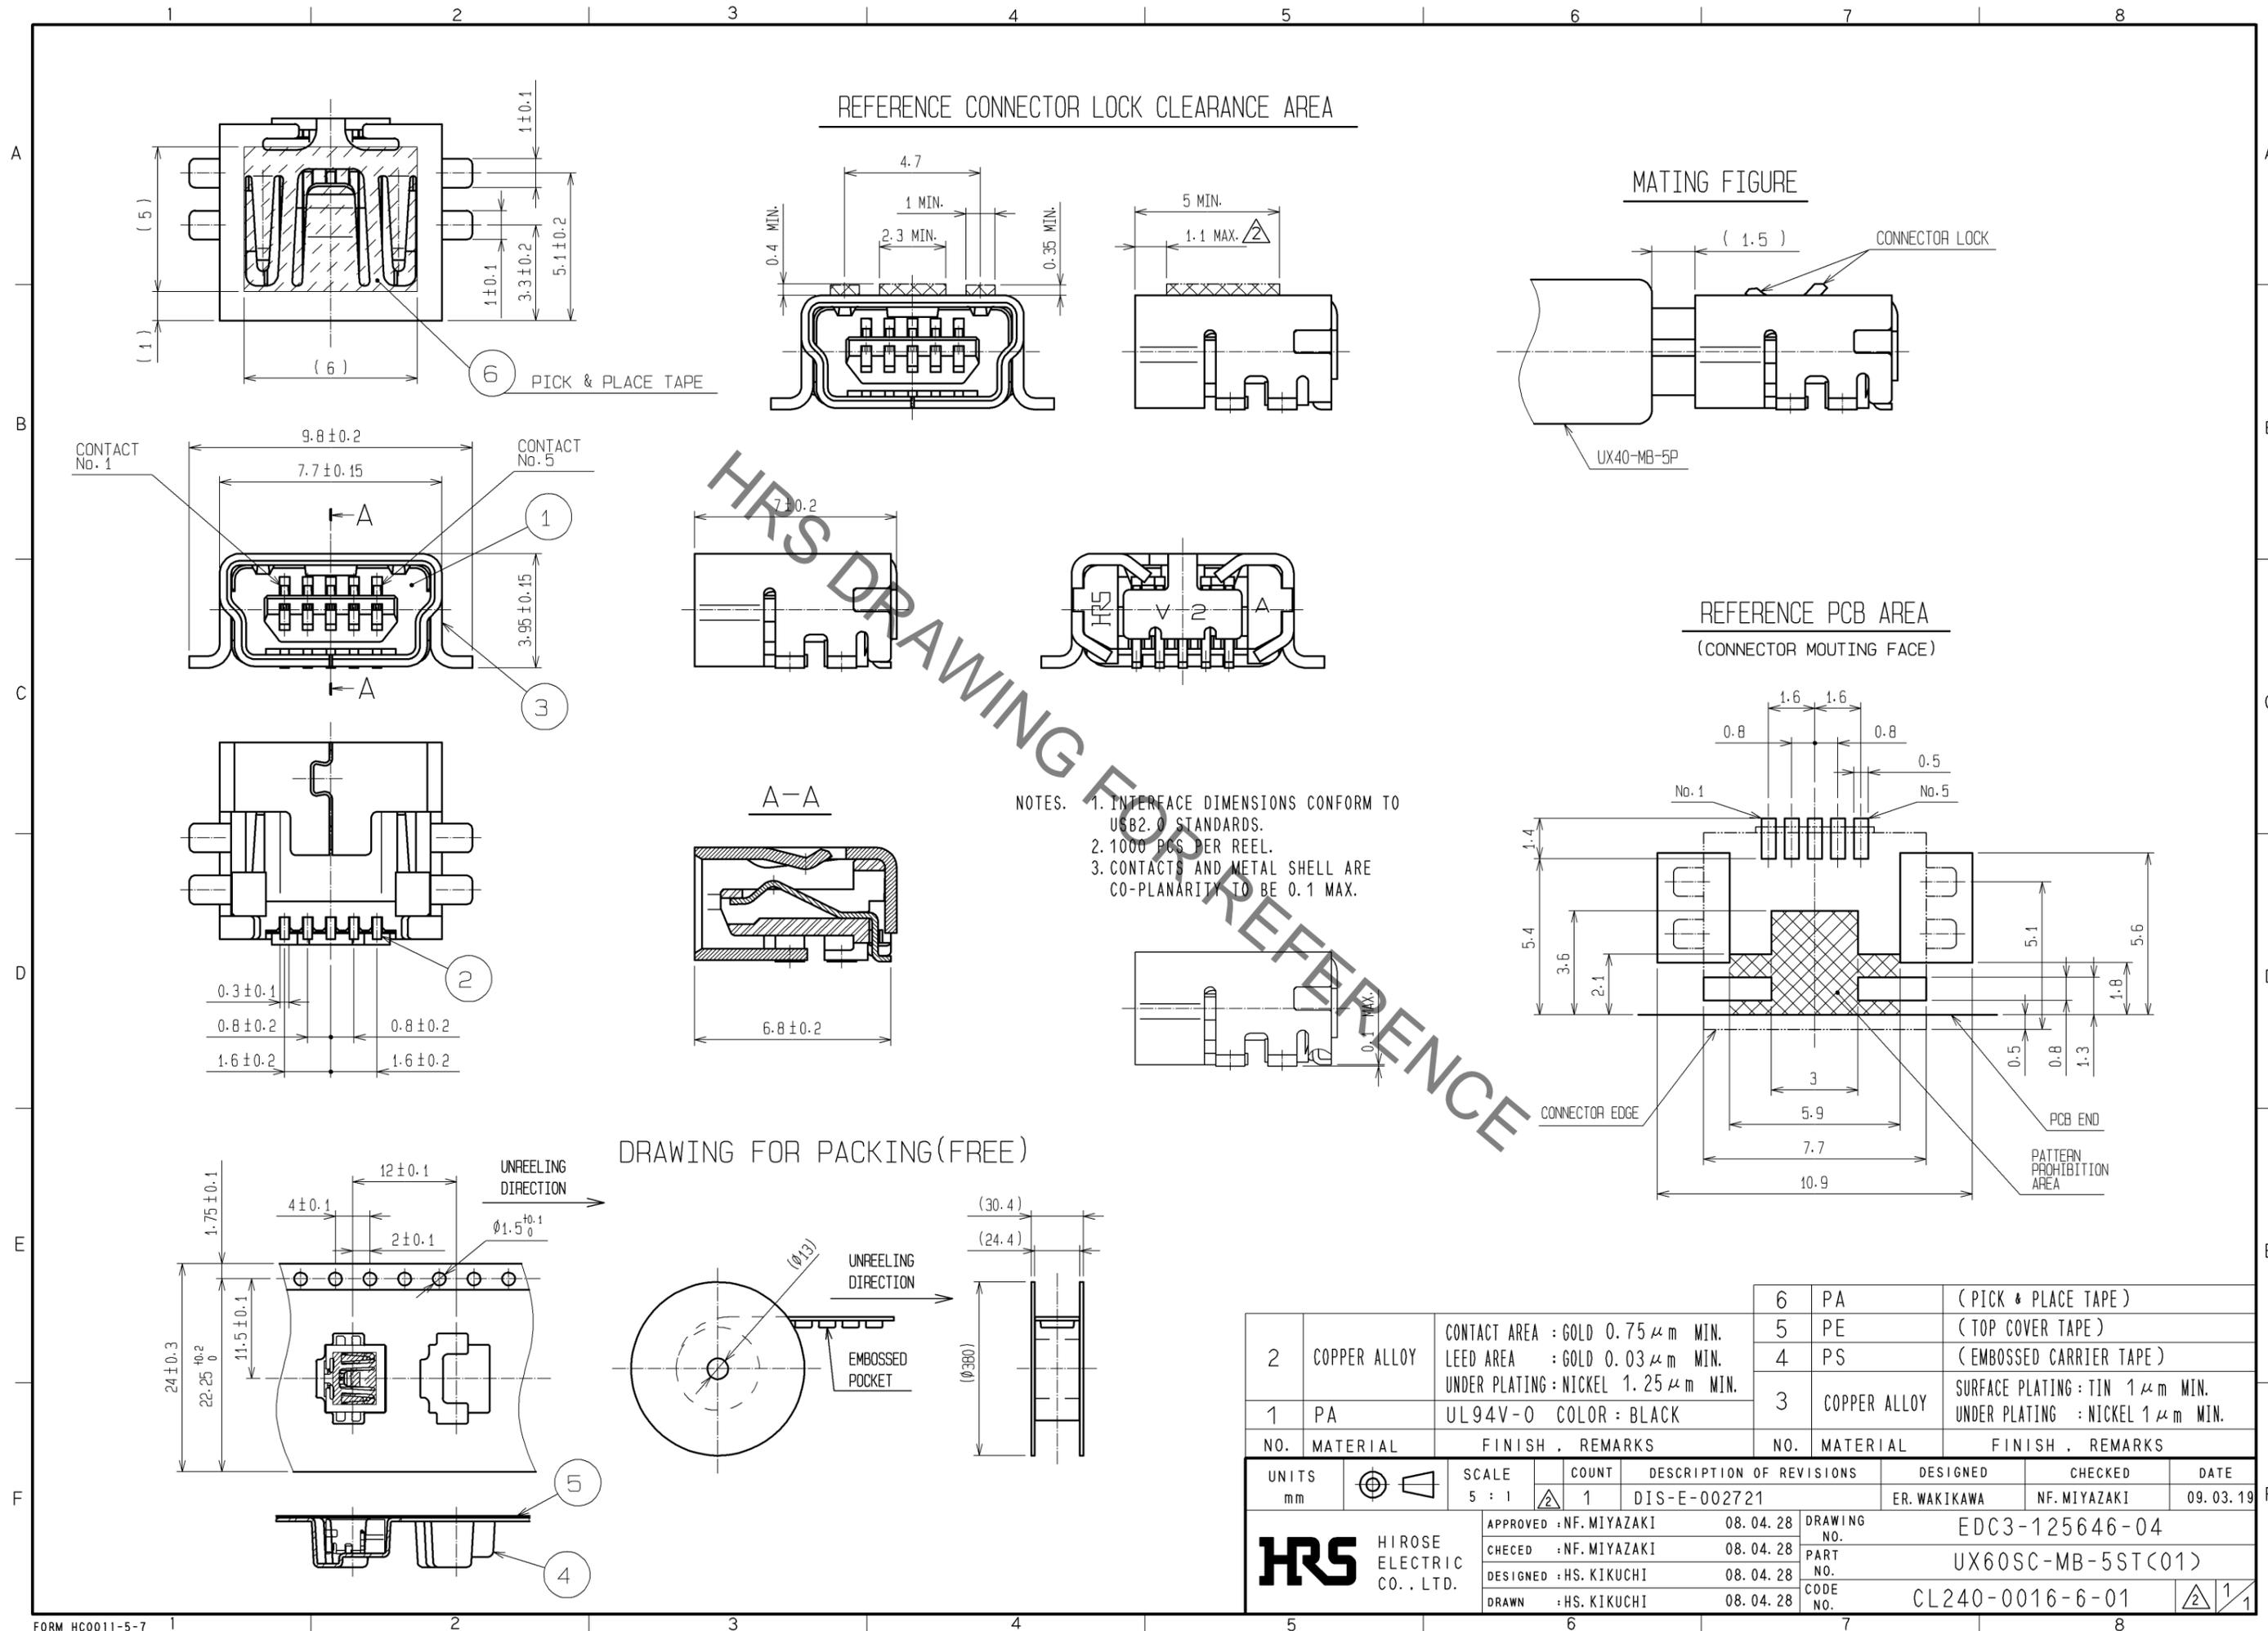

REFERENCE CONNECTOR LOCK CLEARANCE AREA

MATING FIGURE

REFERENCE PCB AREA  
(CONNECTOR MOUNTING FACE)

- NOTES.
1. INTERFACE DIMENSIONS CONFORM TO USB2.0 STANDARDS.
  2. 1000 PCS PER REEL.
  3. CONTACTS AND METAL SHELL ARE CO-PLANARITY TO BE 0.1 MAX.

DRAWING FOR PACKING(FREE)

2	COPPER ALLOY	CONTACT AREA : GOLD 0.75 μm MIN. LEED AREA : GOLD 0.03 μm MIN. UNDER PLATING : NICKEL 1.25 μm MIN.	6	PA	( PICK & PLACE TAPE )
1	PA	UL94V-0 COLOR : BLACK	5	PE	( TOP COVER TAPE )
			4	PS	( EMBOSSED CARRIER TAPE )
			3	COPPER ALLOY	SURFACE PLATING : TIN 1 μm MIN. UNDER PLATING : NICKEL 1 μm MIN.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-002721	DESIGNED ER. WAKIKAWA	CHECKED NF. MIYAZAKI	DATE 09. 03. 19
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : NF. MIYAZAKI	08. 04. 28	DRAWING NO. EDC3-125646-04			
		CHECED : NF. MIYAZAKI	08. 04. 28	PART NO. UX60SC-MB-5ST(C01)			
		DESIGNED : HS. KIKUCHI	08. 04. 28	CODE NO. CL240-0016-6-01			
		DRAWN : HS. KIKUCHI	08. 04. 28				