ISO9001: 2000 ISO14001: 2004

## APPROVAL SPECIFICATIONS

Title. TACT SWITCH

Product Model. KAN1210

Customer's Part NO.

Customer's Model:

## Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

APPROVE	REVIEW	POLT
孙自波	王勤军	金成尧

WENZHOU GANGYUAN ELECTRONICS CO., LTD.



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN1210	TACT SWITCH	A

#### A. Specification & meanings

The name of the tact switch is composed by type and specification, the particular meaning of the type, specification and code is as follows.

KAN1210 — □□□		
	ТТ	
	Press force (refer to chart 3)	
	Stem cotor (refer to chart 2)	
	Product height (refer to chart	1)

1. Product height: It is denoted by three figures; For examples, 073 expresses the product which the total height is 7.3mm, as chart 1 shows:

Code	Product height	Code	Product height	Code	Product height
073	7.3 (Joint stem)				

2. Stem color: It is expressed by a figure, as chart 2 shows:

Color	Black		
Code	1		

3. Operating force: An English letter expresses it, unite: Newton (N),as chart 3 shows:

force Spec		Press force	Return force	
В	1.6	1.6±0.5	0.4min	
С	2.6	2.6±0.5	0.6min	
D	1.3	1.3±0.5	0.4min	

Examples: "KAN1210-0731B" denotes the tact switch with 12×12 base, the height is 7.3mm,the stem is black , the operating force is 1.6N.

APPROVE BY 孙自波 11. 09. 03 CHECKED BY 王勤军	11.09.03 PRPARE BY 金成尧 11.09.03
--	---------------------------------



GYUAN CO.,LTD

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION	
		KAN1210	TACT SWITCH	А	

1、 概述

**GENERAL** 

1.2 适用范围

#### APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

#### Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下)
- -20°C ~70°C (Normal humidity, normal air pressure)

1.4 贮藏温度范围

- Storage Temperature Range —30℃~80℃(在标准大气压、标准湿度条件下)
- $-30^{\circ}$ C  $\sim$ 80°C (Normal humidity, normal air pressure)

1.5 测试条件

#### **Test Conditions**

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......**20℃±2℃** 

Temperature......20°C±2°C

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

APPROVE BY 孙自波 11.09.03 CHECKED BY 王勤军 11.09.03 PRPARE BY 金成尧 11.09.03



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN1210	TACT SWITCH	А

详细说明

**Detailed specification** 

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

**ELECTRICAL SPECIFICATION** 

∓Æ:							
项	目		1	试验条件			要求
ITI	EM		TEST CONDITIONS			REC	UIREMENTS
			在以 5V 10mA 的直流电源或不低于 1KHz 的交流电源的电路中,以一个等于 2 倍按力的静负荷施加于手柄中心				
	;	接触电阻	Applying a static l	load of 2 times oper	rating force to		<100.0
1		act Resistance	the center of the stem,	, measurements sha	III be made by		$\leq 100$ m $\Omega$
			5V DC 10mA or mo	re than 1KHZ AC	small-current		
			contact resistance met	er.			
2	ı	绝缘电阻 Insulation Resistance	在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值  Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.				≥100MΩ
3	介质耐压 在端子之间施加 250V AC (50HZ 或 60HZ) /1min 250V AC (50HZ or 60HZ) shall be applied across voltage proof terminals, for one minute.				无击穿、无飞弧 There should be breakdown and flashover		
APPROVI	E BY	孙自波 11.09.0	03 CHECKED BY	王勤军 11.09.03	PRPARE B	Y	金成尧 11.09.03



GANGYUAN APPROVAL SPECIFICATIONS								
С	USTOMER	CUSTOMER'	S P/N G	YE'S P/N	PF	RODUCT		REVISION
			k	AN1210	TAC	T SWITCH	I	А
	项目		试验	条件			l l	要求
	ITEM		TEST CO	NDITIONS			REG	QUIREMENTS
		ECIFICATION						
1	按力 Operating Force	开关垂直于操作量开关导通所需 Placing the sw vertical and the center of the s	T关垂直于操作方向放置,在开关驱动件顶端中心逐渐施力,测量开关导通所需的最大力度。 Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.					fer to chart 3
2	行程 Full Trave	开关驱动件顶端 Placing the sw vertical and the the center of th	长垂直于操作方向放置,以一个等于 2 倍按力的静负荷施加在长驱动件顶端中心,测量顶端移动的距离。cing the switch such that the direction of switch operation is tical and then applying static load of 2times operating force to center of the stem; the travel distance for the switch to come stop shall be measured.					).3±0.15mm
APP	ROVE BY	孙自波 11.09.03	CHECKED B	Y 王勤军 11	.09.03	PRPAR	E BY	金成尧 11.09.03



	GANGTUAN ALLITOVAL OF LOTHOATIONS								
С	USTOMER	CUSTOMER'S P/N	GYE'S	P/N	PR	ODUCT		REVISION	
			KAN1:	210	TACT	r switch		Α	
	项目		试验条	件			要求		
	ITEM		TEST CONDITIONS					QUIREMENTS	
3	回弹力 Return Force	开关垂直于操作方向后,测量顶端向自由The sample switch operation is vertical to the whole travel d	开关垂直于操作方向放置,在开关驱动件顶端中心下降至全行程后,测量顶端向自由位置转换的力度。 The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center to the whole travel distance, the force of the stem to return to its free position shall be measured.						
4	停止强度 Stop Strengt	荷持续 1min。 h Placing the switch s vertical, and then a	开关垂直于操作方向放置,从操作方向向驱动件施加 30N 的静负荷持续 1min。 Placing the switch such that the direction of switch operation is vertical, and then a static load of 30N shall be applied in the direction of stem operation for a period of 1 min.					L械和电气损坏 shall be no sign of e mechanically and electrically.	
5	手柄拔出 强度 Stem Strength	的行程范围。 Placing the switch s vertical, and then the	开关垂直于操作方向放置,反方向实施最大操作力,并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured.					20N.min.	
在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:2s±0.5s Immersion time: 2s±0.5s 对于其它步骤参考《GB 5095.6—86》试验 12a The other steps please refer to《GB 5095.6-86》TEST 12a						90%以上 Except	for the edge, the should cover a		
APP	ROVE BY	孙自波 11.09.03 CH	IECKED BY	王勤军 11.	09.03	PRPARI	E BY	金成尧 11.09.03	



С	USTOMER		CUSTOMER	'S P/N	GYE'	S P/N	PF	RODUCT		REVISION
					KAN	1210	TAC	T SWITCH		А
	项目	<u> </u>			试 验	条件				要求
	ITEM				TEST CON	IDITIONS	i		RE	QUIREMENTS
5、极限电气性能: ENVIRONMENTAL SPECIFICATION										
1	低温测试 Resistance low tempera	to ature	标准湿度的 Following t normal ten measurem (1) 温 Tem (2) 时间	样品应按照以下实验条件进行测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 n before measurements are made:  (1) 温度: -30±2℃  (2) 时间: 96h  Time: 96h						H: ≤200mΩ resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3
2	高温测试 Heat resista	nce	标准湿度的 forth below humidity co (1) 温质 ten (2) 时间	temperature:80±2°C						阻: ≤200mΩ t resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3
3	温度周期性 Change temperati	of	样品应放在 试期间样品 After 5 cyc allowed to conditions	根据下面的测试要求进行 5 次循环的温度周期性测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试。测试期间样品应保持干燥.  After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test water drops shall be removed.  Temperature Time  1 cycle 1 cycle 65±2℃ 2 65~-10℃ 1					Contac ≤200ms 项目 3,4	
APP	ROVE BY	孙自	波 11. 09. 03	СНІ	ECKED BY	王勤军	11.09.03	PRPARE	E BY	金成尧 11.09.03



С	USTOMER	(	CUSTOMER'S	P/N GY	E'S P/N	PRODUCT		REVISION		
				K	KAN1210 TACT SWITCH		ı	Α		
	项目	L		试明	金条件			要求		
	ITEM			TEST C	ONDITIONS		RE	QUIREMENTS		
4	湿温测试 Moisture resistance		样品应按照以下实验条件进行测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:  (1) 温度: 60±2℃ temperature: 60±2℃ (2) 相对湿度: 90%~95% relative humidity:90% to 95%  可问: 96h time: 96h					接触电阻: ≤200mΩ Contact resistance: ≤200mΩ 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3		
5	硫化试验 Sulfuration resistance	n	样品应按照以下实验条件进行测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:  (1) H2S 气体浓度: 3ppm±1ppm H <sub>2</sub> S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h (3) 温度: 40±2℃(90~95%RH) temperature: 40±2℃(90~95%RH)					阻:≤200mΩ ct resistance: iΩ ,4.1,4.2,4.3 4.1,4.2,4.3		
6	在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ (2) 盐溶液浓度: 5±1% (质量百分比) salt solution: 5±1%(solids by mass)					金属件上没有腐蚀斑点 No remarkable corrosion shall be recognized in metal part.				
APP	PROVE BY	孙自》	皮 11. 09. 03	CHECKED BY	王勤军 11	.09.03 PRPAR	E BY	金成尧 11.09.03		



	GANGYUAN APPROVAL SPECIFICATIONS								
CUSTOMER CUSTOMER'S P/N			P/N GYE'S	6 P/N	Р	RODUCT		REVISION	
				KAN	1210	TAC	CT SWITCH		А
	限机械性能: NDURANCE	SPEC	SIFICATION					I	
	项目			试验	条件				要求
	ITEM			TEST CON	DITIONS			RE(	QUIREMENTS
	工作寿命 Operation		相根下面的测	<b>注</b> 面表进汽涮净					
DC 12V, 50 mA resistive load resistance≤200							初值的±30% ng Force: alue±30% 4.1,4.2,4.3		
2	振动 Vibra	根据以下给定条件进行测试: Measurement shall be made following the test set forth below: (1) 振动频率范围: 10~55~10Hz Vibration frequency range: 10 to 55 to 10Hz (2) 振幅(峰一峰): 1.5mm Amplitude: 1.5mm (3) 振动方向:包括手柄行程方向在内的三个相互垂直的方向 Direction of vibration:Three mutually perpendicular direction including the direction of stem travel (4) 测试时间:每次 2hours. Duration: Each 2hours.				z 互垂直的方 pendicular		1.1,4.2,4.3 1.1,4.2,4.3	
-	接条件: ERING CON	DITIO	NS:				1		
			请按	以下条件进行焊接	•				
				以,水口及17.47g 焊锡温度 <b>:≤350℃</b>					
7.1	手工焊接		(2) 连续焊接时间: ≤3 s						
	Hand solde	ering	Pleas	se practice accord	ing to below	conditio	ons:		
			` ,	Soldering temperation					
APP			波 11. 09. 03	CHECKED BY	王勤军 11.	09.03	PRPARE	BY	金成尧 11.09.03



CUSTOMER		CUSTOMER'S P/N	CUSTOMER'S P/N GYI		PRODUCT	REVISION		
KAN			AN1210	TACT SWITCH	А			
	自动浸焊	项目 Items	项目 Items		条件 Condition			
	Conditions for 助焊剂附着量 Flux built-up			不附着于零部件贴装面的程度 Mounting surface should not be coated with flax				
	Auto-dip	预热温度 Preheating temper	预热温度 Preheating temperature		印刷电路板焊接面的周围温度 100℃ max. Ambient temperature of the soldered surface of PC board. 100℃ max.			
7.2		预热温度时间 Preheating tim	ne	60s max.				
		焊接温度 Soldering temper  焊接浸渍时间  Continuous dipping tir		260 C max.				
	WER			4016	5s max.			
		焊接次数	欠数 2次以下					
	<b>担控</b> 说明.	Number of solds	ering	2times max.				

#### 焊接说明:

1、开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.

1.1 在使用烙铁的情况下,焊锡温度应在350℃以下、3秒以内。

In the case of using solding iron, solding conditions shall be 380℃ max and 3 sec.max.

1.2 浸焊后,注意不要在顶部施加负荷。

Right after switches were soidered; please be careful not to load to on the knobs of switches.

- 2、设计中应注意的事项( Design instructions)
- 2.1 印刷基板的安装孔尺寸参见产品图。

Follow recommended P.W.B. piercing plan in outside drawing page.

- 3、注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关。

Please be cautions not to give excessive static load or shock to swiches.

3.2 开关浸焊后,印刷基板注意不要叠放。

Please be careful not to pile up P.W.B.after switches were soldered.


**3.3** 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。


Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially. When you need to preserve for a long period, do not open the carton.


APPROVE BY	CHECKED BY	王勤军 11.09.03	PRPARE BY	金成尧 11.09.03
------------	------------	--------------	-----------	--------------



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION	
		KAN1210	TACT SWITCH	А	

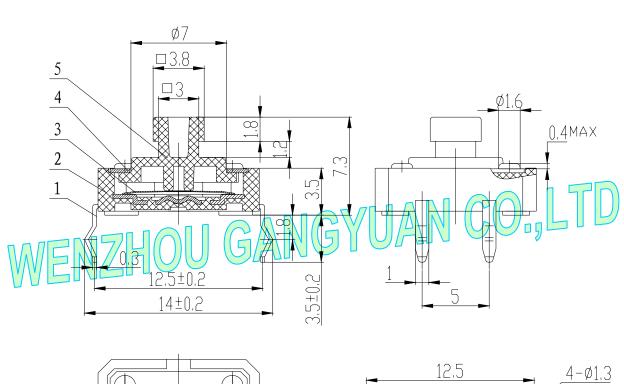



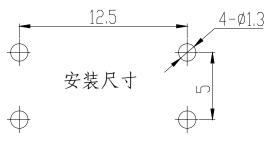

General tolerance: ±0.2mm

	NO.	NAME MATERIAL NATIONALITY QTY.		FINISHING				
	1 TERMINAL 2 CASE		Brass	China	1	Silver plating		
			PA66 China 1		Black			
	3	CONTACT	Phosphor bronze	Korea	1	Contact side silver plating		
	4	COVER	SPCC-SD	China	1	CuSn plating		
	5	STEM	PA66	China	1	ВІ	ack	
APPF	ROVE BY	孙自波 11.09.03	CHECKED BY	/ 王勤军 11.0	9.03 F	RPARE BY	金成尧 11.09.	



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION	
		KAN1210	TACT SWITCH	A	

#### 8. 生产工场: The country of origin

WENZHOU GANGYUAN ELECTRONICS CO.,LTD NO.392 NING KANG EAST ROAD OF YUE QING CITY, ZHE JIANG

### 9. 包装: Packing

产品规格	包装袋 PACKING BAG		内包装箱 INTER BOX		外包装箱 OU	ТВОХ	净重	毛重
KAN1210	规 格(Cm)	数量(pcs)	规 格(Cm)	袋数	规 格(Cm)	盒数	(Kg)	(Kg)
073	19×21	500	$21.6 \times 16.5 \times 6.1$	2//	44.5×35×28	16	13.2	15.311

# WENZHOU GANG 13.2