

# LQM21FN4R7M70#



“#” indicates a package specification code.

## Large Current



< List of part numbers with package codes >  
LQM21FN4R7M70L LQM21FN4R7M70B

## Appearance & Shape



(in mm)

## References

Packaging	Specifications	Minimum Order Quantity
L	180Embossed Tape	3000
B	Bulk(Bag)	1000

Mass (typ.)	
1 piece	0.016g

### Attention

- This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# LQM21FN4R7M70#

“#” indicates a package specification code.

## Specifications

L size	2.0±0.2mm
W size	1.25±0.2mm
T size	1.25±0.2mm
Size code inch (mm)	0805 (2012)
Inductance	4.7μH±20%
Inductance Test Frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	120mA
Max. of DC resistance	0.455Ω
Class of magnetic shield	Ferrite Core
Self resonance frequency (min.)	25MHz
Operating Temperature Range(Self-temperature rise is not included)	-55°C to 125°C
DC Resistance Intermediate Values	0.35Ω±30%
Series	LQM21FN_70

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


# LQM21FN4R7M70#

"#" indicates a package specification code.

## Product Data

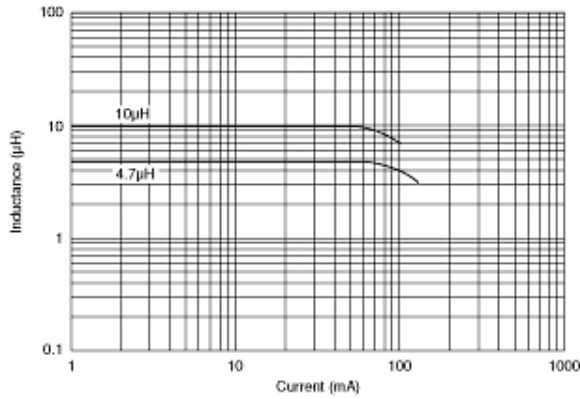

Impedance - Current Characteristics

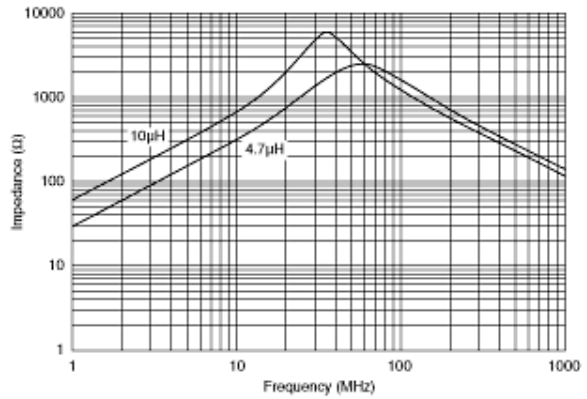

Impedance - Frequency Characteristics

**Attention**

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.