


FACTORY I.D.

CIRCUIT NUMBERS


CIRCUIT I.D. NUMBERS

5


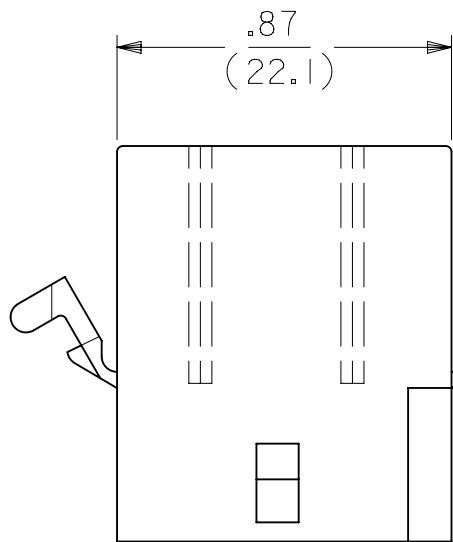


OPTIONAL
MOUNTING EAR
(PREBENT EAR
SHOWN)

OPTIONAL
LOCKING RAMPS

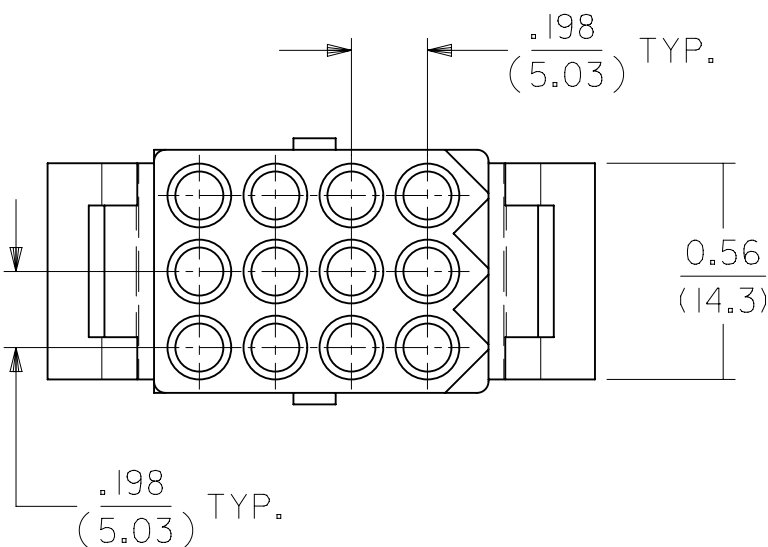

RECEPTACLE

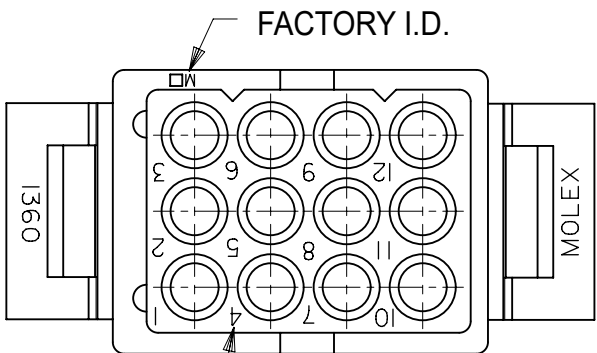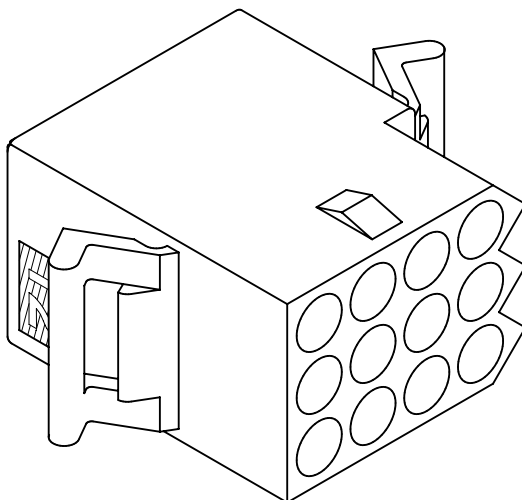


FACTORY I.D.



CIRCUIT NUMBERS

CIRCUIT I.D. NUMBERS


5

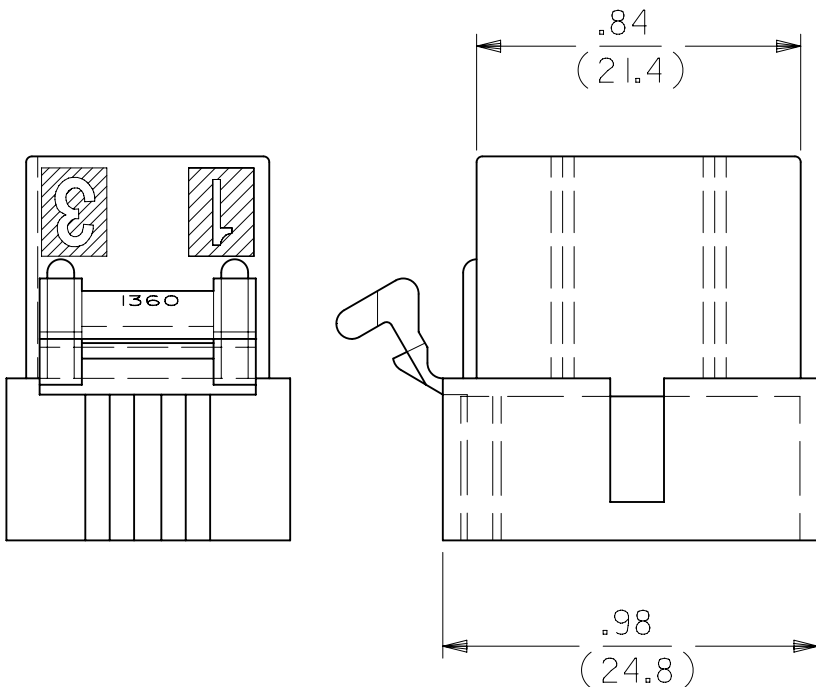

OPTIONAL
MOUNTING EAR
(PREBENT EAR
SHOWN)

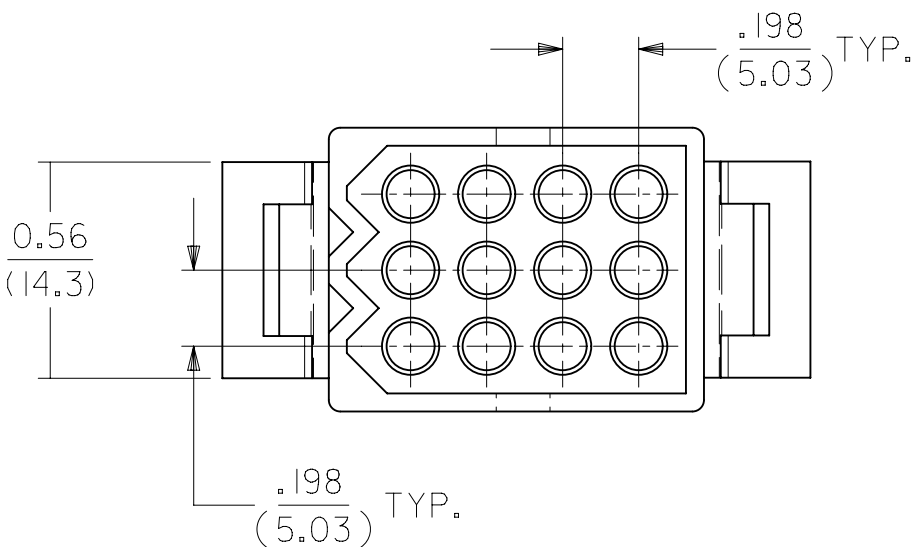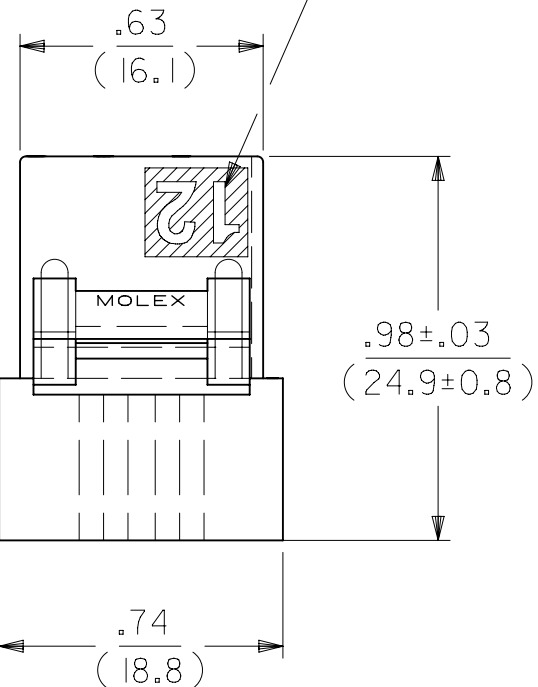

PLUG

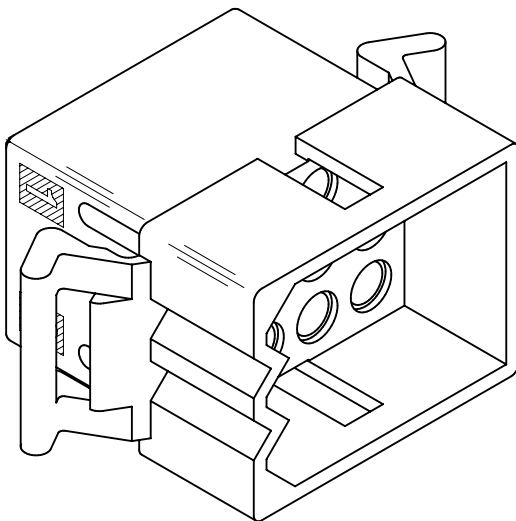

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PARTS AS PER PCN 511086				molex .093/(2.36) HOUSINGS PLUG AND RECEPTACLE 12 CKT, .198/(5.03)CTR.				
IN/MM		2:1										
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 699022 DRWN: RPRABHUM 2022/03/09 CHK'D: GGA 2022/03/23 APPR: GGA 2022/03/23				PRODUCT CUSTOMER DRAWING				
4 PLACES		±	MM	±	INCH		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
3 PLACES		±		±	0.01		SD-1360-X		PSD	001	AE3	
2 PLACES		±	0.25	±	0.014							
1 PLACE		±	0.35	±								
0 PLACES		±		±								
ANGULAR TOL				±	2.0 °							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
						C-SIZE	1360	SEE CHART		GENERAL MARKET		1 OF 2

12 11 10 9 8 7 6 5 4 3 2 1

PLUG

ORDER NO	ENG NO
03-09-2121	I360-P

RECEPTACLE

ORDER NO	ENG NO
03-09-1121	I360-R ⁶
03-09-1125	I360-R2 ⁶
03-09-1126	I360-R3
03-09-6121	I360-RBK
03-09-6125	I360-R2BK
03-09-6126	I360-R3BK

LEGEND: PLUG

I360-P***

P = PLUG

BLANK = WITHOUT EARS
I = WITH MOUNTING EARS

COLOR:

BLANK = NATURAL COLOR
AM = AMBER BK = BLACK BU = BLUE
BN = BROWN GY = GRAY GN = GREEN
OR = ORANGE RD = RED YW = YELLOW

LEGEND: RECEPTACLE

I360-R***

R = RECEPTACLE

OPTION	PREBENT EARS	LOCKING RAMP
BLANK	X	
1		
2	X	X
3		X

X = PRESENT

COLOR:

BLANK = NATURAL COLOR
AM = AMBER BK = BLACK BU = BLUE
BN = BROWN GY = GRAY GN = GREEN
OR = ORANGE RD = RED YW = YELLOW

RECOMMENDED PANEL OPENING

HOUSING	DIM. "A"	DIM. "B"	"C" PREBENT EAR	"C" STANDARD EAR
PLUG	1.155/(29.34)	.760/(19.30)	.40/(10.2)	.36/(9.1)
RECEPT.	1.050/(26.67)	.725/(18.42)	.41/(10.4)	.37/(9.4)

NOTES:

1. MATERIAL: NYLON TYPE 6/6, UL94V-2

2. FINISH: N/A

3. PRODUCT SPECIFICATION: PS-02-09, PS-43660-9999

4. PACKAGING SPECIFICATION: PK-1360-001

5. CIRCUIT I.D. NUMBERS ON SIDE OF HOUSING APPEAR ON PARTS FROM TOOLS BUILT AFTER 10/22/91

6. WHERE DENOTED IN CHART, TOOLS ARE BUILT WITH PREBENT MOUNTING EARS PER DETAIL B AND SUPERSEDE ALL TOOLS PREVIOUSLY BUILT WITH THE STANDARD EARS.

7. PARTS CONFORM TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

DETAIL A

.093/(2.36) STANDARD MOUNTING EAR
(SCALE 4:1)

DETAIL B

.093/(2.36)PREBENT MOUNTING EAR
(SCALE 4:1)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
DIMENSION UNITS	SCALE	CURRENT REV DESC: REMOVED OBSOLETE PARTS AS PER PCN 511086	
IN/MM	2:1		
GENERAL TOLERANCES (UNLESS SPECIFIED)			
	MM	INCH	
4 PLACES	±	±	
3 PLACES	±	± 0.01	
2 PLACES	± 0.25	± 0.014	
1 PLACE	± 0.35	±	
0 PLACES	±	±	
ANGULAR TOL	± 2.0 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING
		C-SIZE	SERIES
			1360
		MATERIAL NUMBER	
		SEE CHART	
		CUSTOMER	
		GENERAL MARKET	
		SHEET NUMBER	
		2 OF 2	

DOCUMENT STATUS	P1	RELEASE DATE	2022/03/23	06:00:54
-----------------	----	--------------	------------	----------