

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1053141210](#)  
**Status:** **Active**  
**Overview:** Nano-Fit Power Connectors  
**Description:** Nano-Fit Right-Angle Header, Through Hole, 2.50mm Pitch, Dual Row, 10 Circuits, 0.38µm Gold (Au) Plating, Black, Glow-Wire Capable, Tray

**Documents:**

|                                                                  |                                                                   |
|------------------------------------------------------------------|-------------------------------------------------------------------|
| <a href="#">Drawing (PDF)</a>                                    | <a href="#">Product Specification PS-105300-100-001 (PDF)</a>     |
| <a href="#">3D Model (PDF)</a>                                   | <a href="#">Application Specification AS-105300-100-001 (PDF)</a> |
| <a href="#">3D Model</a>                                         | <a href="#">Packaging Specification PK-105309-200-000 (PDF)</a>   |
| <a href="#">Product Specification 1053001000-PS-CH-000 (PDF)</a> | <a href="#">Test Summary 1053000000-TS-000 (PDF)</a>              |
| <a href="#">Product Specification 1053001000-PS-ES-000 (PDF)</a> | <a href="#">Datasheet (PDF)</a>                                   |
| <a href="#">Product Specification 1053001000-PS-JP-000 (PDF)</a> | <a href="#">Symbol Footprint Data SYM-105314-XX10 (PDF)</a>       |
| <a href="#">Product Specification 1053001000-PS-SK-000 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>              |

**Agency Certification**


|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                       |                                           |
|-----------------------|-------------------------------------------|
| Product Family        | PCB Headers                               |
| Series                | 105314                                    |
| Application           | Power, Wire-to-Board                      |
| Overview              | <a href="#">Nano-Fit Power Connectors</a> |
| Packaging Alternative | 1053141710                                |
| Product Name          | Nano-Fit                                  |
| UPC                   | 887191927565                              |

**Physical**

|                                |                        |
|--------------------------------|------------------------|
| Breakaway                      | No                     |
| Circuits (Loaded)              | 10                     |
| Circuits (maximum)             | 10                     |
| Color - Resin                  | Black                  |
| Durability (mating cycles max) | 50                     |
| Flammability                   | 94V-0                  |
| Glow-Wire Capable              | Yes                    |
| Guide to Mating Part           | No                     |
| Keying to Mating Part          | Yes                    |
| Lock to Mating Part            | Yes                    |
| Material - Metal               | Brass                  |
| Material - Plating Mating      | Gold                   |
| Material - Plating Termination | Tin                    |
| Material - Resin               | Liquid Crystal Polymer |
| Net Weight                     | 1.100/g                |
| Number of Rows                 | 2                      |
| Orientation                    | Right Angle            |
| PC Tail Length                 | 3.20mm                 |
| PCB Locator                    | Yes                    |
| PCB Retention                  | Yes                    |
| PCB Thickness - Recommended    | 1.60mm, 2.40mm         |
| Packaging Type                 | Tray                   |
| Pitch - Mating Interface       | 2.50mm                 |
| Pitch - Termination Interface  | 2.50mm                 |
| Plating min - Mating           | 0.381µm                |
| Plating min - Termination      | 1.524µm                |
| Polarized to Mating Part       | Yes                    |
| Polarized to PCB               | Yes                    |

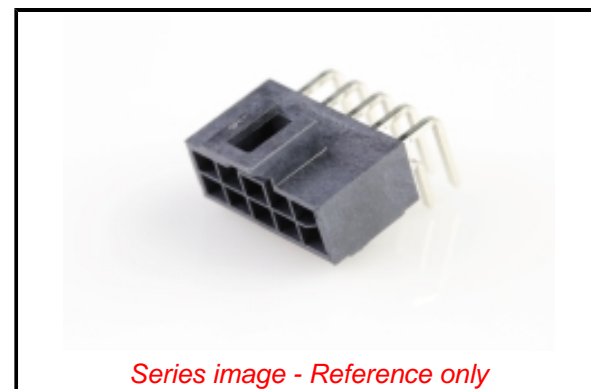

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

105314 Series

**Mates With**

Nano-Fit Receptacle Housing [1053081210](#)

|                                    |                                                                                                                 |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Shrouded                           | Yes                                                                                                             |
| Stackable                          | No                                                                                                              |
| Surface Mount Compatible (SMC)     | No                                                                                                              |
| Temperature Range - Operating      | -40° to +115°C                                                                                                  |
| Termination Interface: Style       | Through Hole                                                                                                    |
| <b>Electrical</b>                  |                                                                                                                 |
| Current - Maximum per Contact      | 7.5A                                                                                                            |
| Voltage - Maximum                  | 250V AC (RMS)/DC                                                                                                |
| <b>Material Info</b>               |                                                                                                                 |
| <b>Reference - Drawing Numbers</b> |                                                                                                                 |
| Application Specification          | AS-105300-100-001                                                                                               |
| Packaging Specification            | PK-105309-200-000                                                                                               |
| Product Specification              | 1053001000-PS-CH-000, 1053001000-PS-ES-000,<br>1053001000-PS-JP-000, 1053001000-PS-SK-000,<br>PS-105300-100-001 |
| Sales Drawing                      | SD-105314-100-000                                                                                               |
| Symbol/Footprint Data              | SYM-105314-XX10                                                                                                 |
| Test Summary                       | 1053000000-TS-000                                                                                               |

This document was generated on 10/27/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**