
MKR2UNO Adapter

SKU TSX00005 **Barcode** 813747020213

Simply mount your MKR1000 to this new adapter and plug in any of your UNO shields!

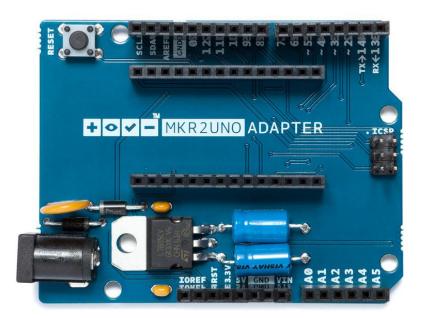

Overview

The MKR2UNO Adapter allows you to turn your Arduino UNO form factor based project into a MKR based one without too much effort! You can so upgrade your project with a powerful board with integrated LiPo battery charger.

Please note that currently the MKR2UNO adapter is compatible only with MKR1000 without headers

Need Help?

- On the Software on the Arduino Forum
- On Projects on the Arduino Forum

• On the Product itself through our Customer Support

Tech specs

Operating Voltage	3.3V
Input Voltage (recommended)	7-12V
Input Voltage (limit)	6-16V
Analog Input Pins	6
Analog Output Pins	1
Digital I/O Pins	14
DC Current for 3.3V Pin	700 mA
DC Current for 5V Pin	700 mA
Length	68.6 mm
Width	53.4 mm
Weight	24 g

Please keep in mind that the MKR2UNO is just a **form factor adapter** and so **is NOT present any voltage translation**. Be careful before connecting a shield since shield without IOREF level shifting capability may not work properly.



Like in many others Arduino boards this adapter allows to power your MKR board using a barrel jack with center positive polarity or the VIN pin on the headers.

Unlike the Arduino UNO, the MKR2UNO Adapter **do NOT have** I2C signals on A4 and A5 and SPI on pins 11, 12 and 13.

All the pins on the MKR2UNO Adapter are wired one to one from the MKR to the UNO form factor with some exception:

MKR form factor pin	UNO form factor pin
0	13
1	10
13	0
14	1