

NUMBER C-316768





三 角 錐 3° 角 度 投 影 法
METRIC

METRIC

PRINT DIST 単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT


NOTES,

1. PRODUCT SPEC., 108-5410
2. APPLICABLE CONTACT P/N
REC CONTACT: 177915-□ (φ20-φ16AWG)
177914-□ (φ26-φ22AWG)
3. MATING CONN. P/N
CAP HSG: 316769-□
TAB CONTACT: 177917-□ (φ20-φ16AWG)
177916-□ (φ26-φ22AWG)
4. APPLICABLE PLATE P/N: 316770-1
5. INSTRUCTION SHEET: 411-5638
- △ SEE TABLE 1
7. PART 5-316768-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT).

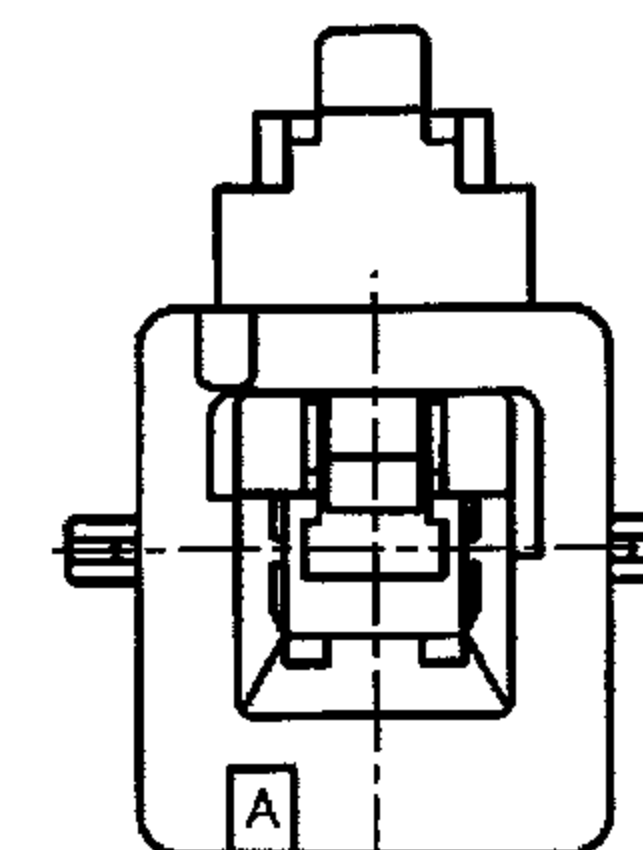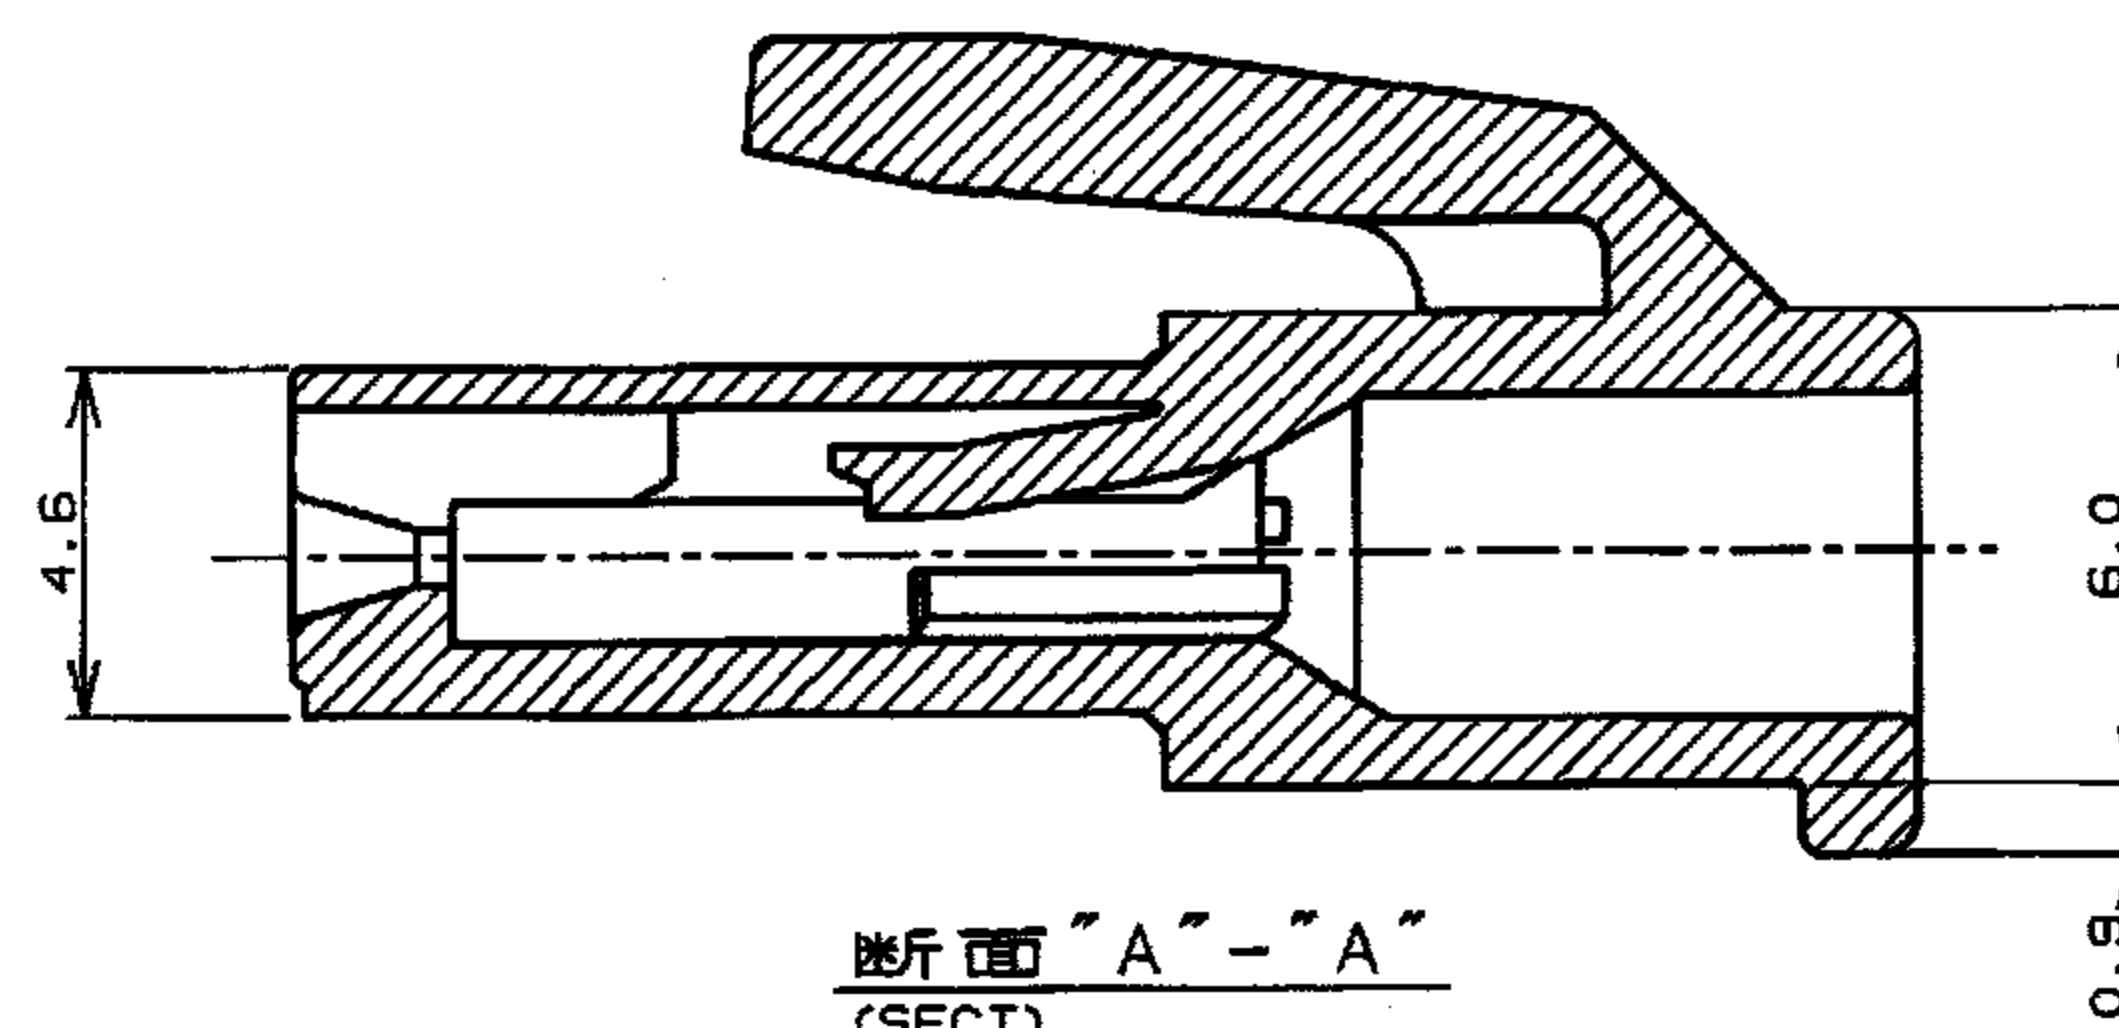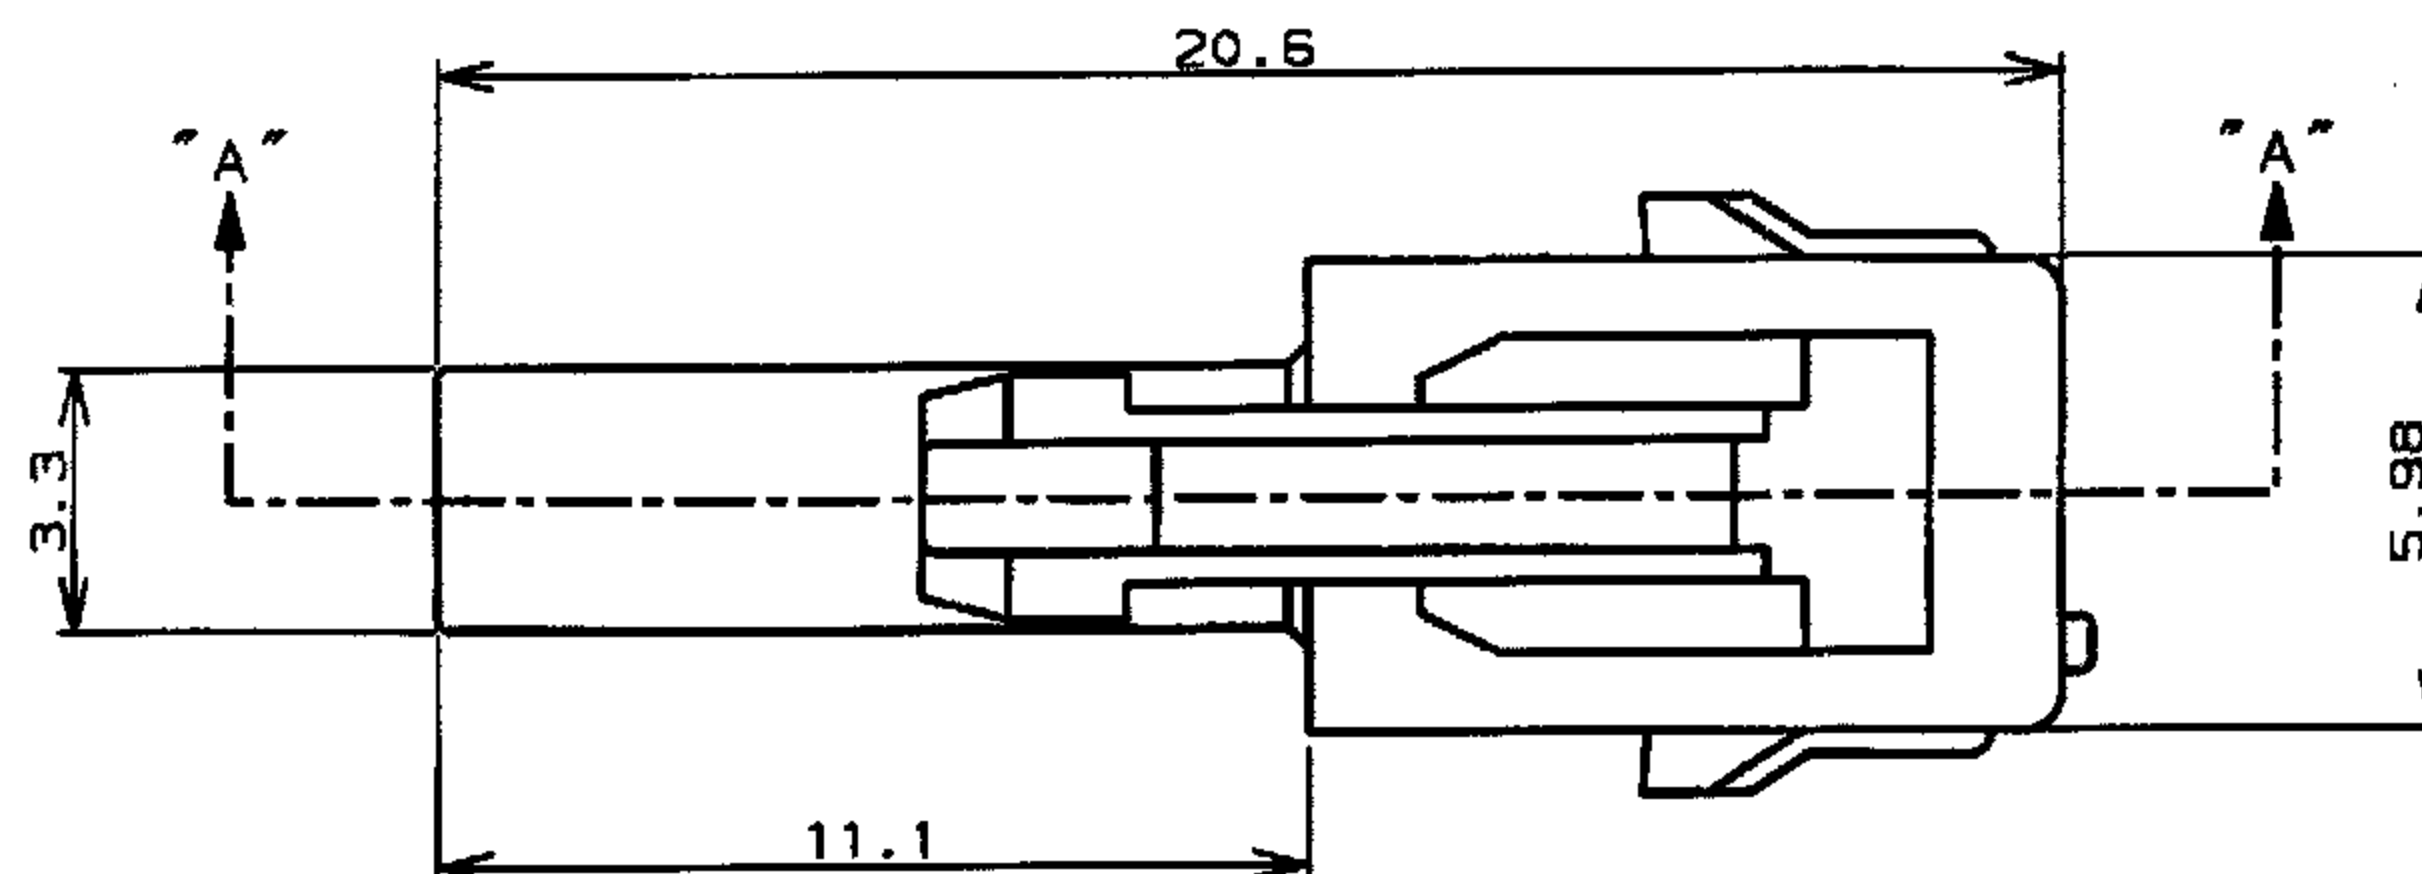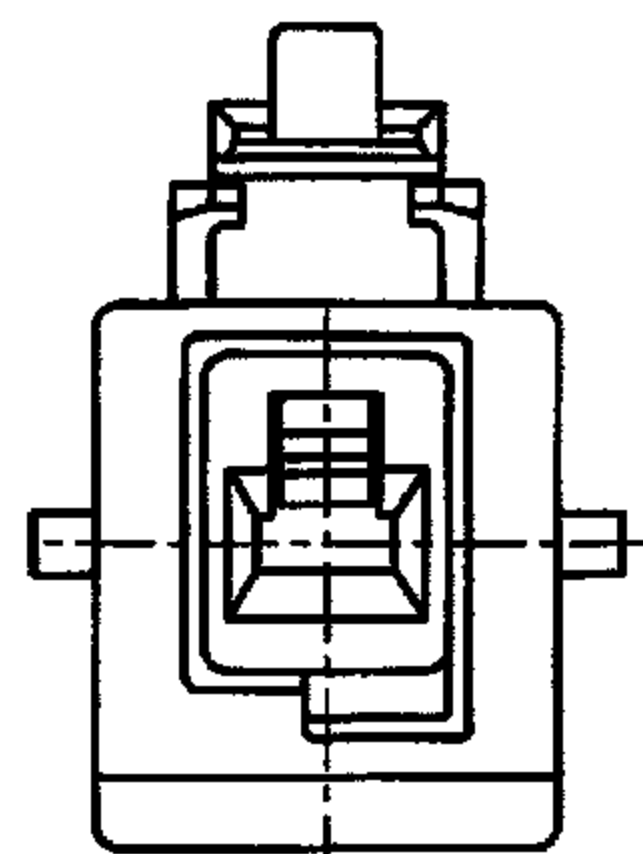

注:

1. 適用製品規格: 108-5410
2. 適用コンタクト型番
リセ・コンタクト: 177915-□ (φ20-φ16AWG)
177914-□ (φ26-φ22AWG)
3. 嵌合相手側製品型番
キャップ・ハウジング: 316769-□
タブ・コンタクト: 177917-□ (φ20-φ16AWG)
177916-□ (φ26-φ22AWG)
4. 適用プレート型番: 316770-1
5. 取扱説明書: 411-5638
- △ 表1参照

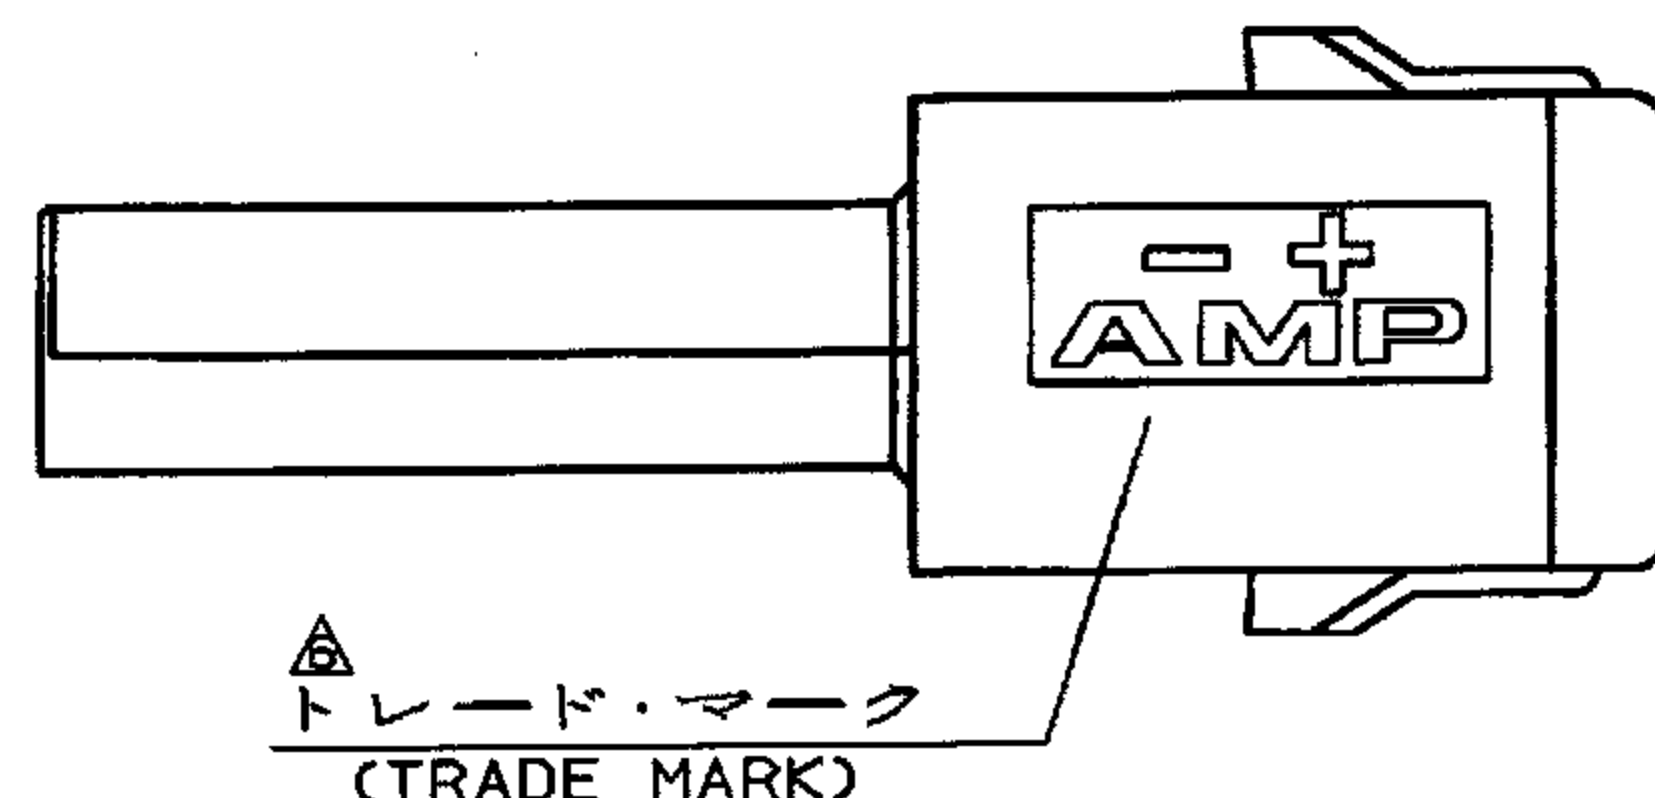

自然色(NATURAL)	1	5-316768-1
黒 (BLACK)	↑	↑ -9
青 (BLUE)	↑	↑ -6
黄 (YELLOW)	↑	↑ -4
赤 (RED)	↓	↓ -2
自然色(NATURAL)	1	316768-1
ハウジング色調 (HOUSING COLOR)	極数 (Pos.)	型番 (P/N)



表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
—AMP OR AMP	日本 (JAPAN)
—+AMP OR AMP	中国 (CHINA(PRC))
•AMP OR AMP	韓国 (KOREA)

												AMP				Tyco Electronics AMP K.I. Kawasaki, Japan			
				细金電線許容範囲 (WIRE RANGE)				被覆外径 (INSULATION DIA.)				名称 (NAME)							
				mm ² (AWG -)				mmφ				AMP POWER DOUBLE LOCK CONN. 3.96mmピッチ プラグハウジング 1極 AMP POWER DOUBLE LOCK CONN. 3.96mm PITCH PLUG HOUSING 1 Pos							
B1 REVISED ECR-13-018171				A.Z		D.Z		20NOV '13		材料 (MATERIAL)				仕上 (FINISH)					
B 変更				FU00-1369-01		NY		MS		11 Jul '16		6/6 ナイロン (UL94V-0)				6/6 NYLON (UL94V-0)			
A 変更				FU00-0953-98		T.Y		MS		21 MAR '98		DR.				22.MAR '98			
O 作成				FU00-3885-95		N.Y		M.S		22MAR '98		N.YAMASAKI				N.YAMASAKI			
LTR 変更 (REVISION RECORD)				DR		CHK		DATE		CHK.				APP.					
										M SHINDO				Y KASHIWA					
														</					