

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [39-00-0181](#)
Status: **Active**
Overview: [Mini-Fit Jr.™](#)
Description: 4.20mm Pitch Mini-Fit® Crimp Terminal, Female, Phosphor Bronze, Gold (Au), 18-24 AWG, Reel

Documents:

Drawing (PDF)	Packaging Specification PK-5556-001 (PDF)
Product Specification PS-5556-001 (PDF)	Test Summary TS-5556-002 (PDF)
Product Specification PS-5556-002 (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Terminals
Series	5556
Application	Power
Crimp Quality Equipment	Yes
Overview	Mini-Fit Jr.™
Product Name	Mini-Fit®
UPC	800755527933

Physical

Durability (mating cycles max)	30
Gender	Female
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Nickel
Net Weight	0.130/g
Packaging Type	Reel
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.30-3.10mm
Wire Size AWG	18, 20, 22, 24
Wire Size mm²	N/A

Electrical


Current - Maximum per Contact	9A
Voltage - Maximum	600V

Material Info

Old Part Number	5556-PBGSP
-----------------	------------

Reference - Drawing Numbers

Packaging Specification	PK-5556-001
Product Specification	PS-5556-001, PS-5556-002
Sales Drawing	SD-5556-GSP*
Test Summary	TS-5556-002

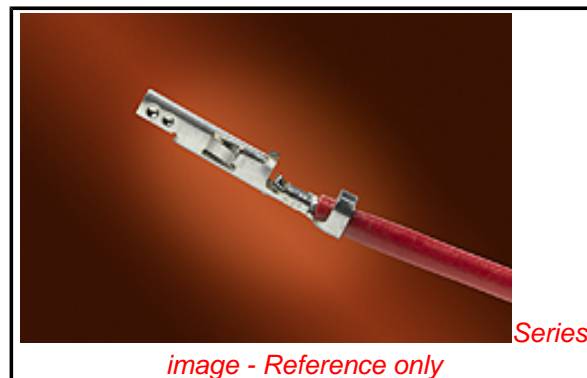

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

**Contains SVHC: No
Low-Halogen Status
Low-Halogen**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[5556Series](#)

Mates With

[5558](#) Mini-Fit® Crimp Male Terminals. Mini-Fit Jr.™ Header, Dual Row, [5566](#) , [5569](#)

Use With

[5557](#) Mini-Fit Jr.™ Receptacle Housing, [30067](#) Mini-Fit® TPA, [42474](#) Mini-Fit® BMI Panel Mount, [44516](#) Mini-Fit® BMI Slide and Lock Panel Mount

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
FineAdjust™ Applicator for Insulation OD	0639002600

2.50-2.95mm - 18-24 AWG FineAdjust™ Applicator for Insulation OD	<u>0639002900</u>
1.65-2.05mm - 18-24 AWG FineAdjust™ Applicator for Insulation OD	<u>0639015600</u>
1.90-2.30mm - 18-24 AWG FineAdjust™ Applicator for Insulation OD	<u>0639023900</u>
1.40-1.70mm - 18-24 AWG FineAdjust™ Applicator for Insulation OD	<u>0639024800</u>
2.50-2.95mm Optimized for 18 AWG Only FineAdjust™ Applicator for Insulation OD	<u>0639024900</u>
2.30-2.60mm - 18-24 AWG Extraction Tool T2 Terminator™ for insulation OD	<u>0011030044</u> <u>0639115600</u>
1.90-2.30mm - 18-24 AWG T2 Terminator™ for insulation OD	<u>0639124900</u>
2.30-2.60mm - 18-24 AWG T2 Terminator™ for insulation OD	<u>0639102600</u>
2.50-2.95mm - 18-24 AWG T2 Terminator™ for insulation OD 1.65 – 2.05mm – 18 – 24	<u>0639102900</u>
AWG T2 Terminator™ for insulation OD	<u>0639123900</u>
1.40-1.70mm - 18-24 AWG T2 Terminator™ for insulation OD	<u>0639124800</u>
2.50-2.95mm optimized for 18 AWG only Hand Crimp Tool for Male and Female Crimp Terminals, 16-24 AWG Wire	<u>0638190900</u>
Japan	
Description	Product #
Applicator for M21 1A Bench Press, 18-24 AWG Wire	<u>0570223000</u>

Side-Feed Applicator 0570223200
For Full-Auto
Machine

This document was generated on 02/11/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION