


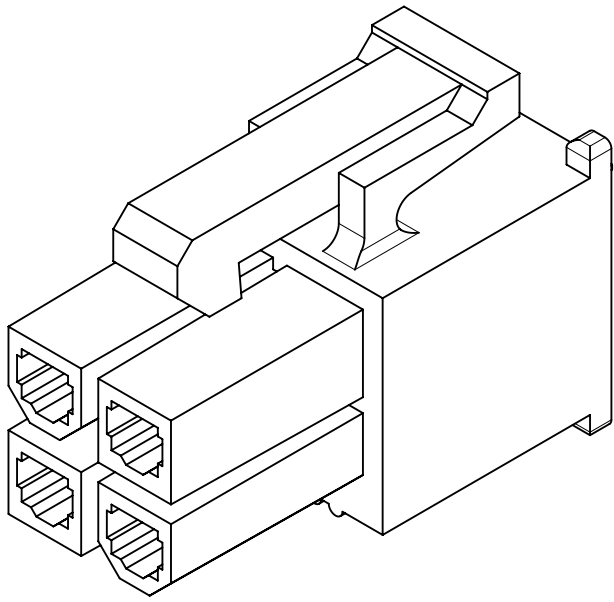
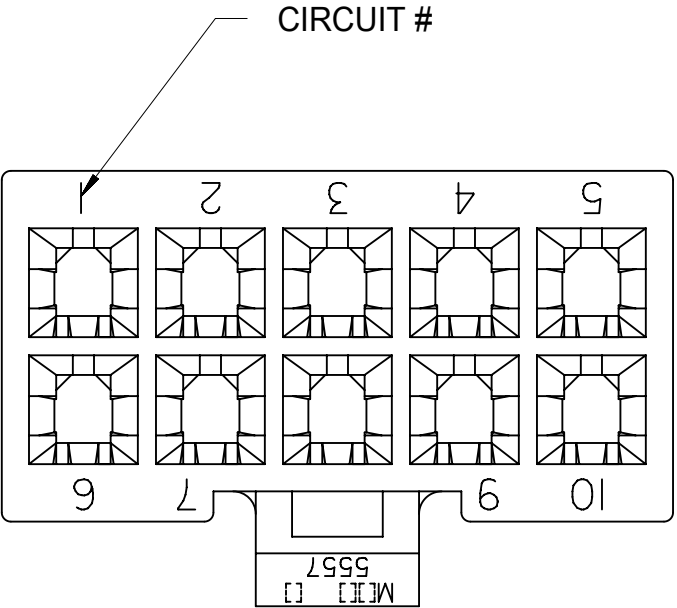


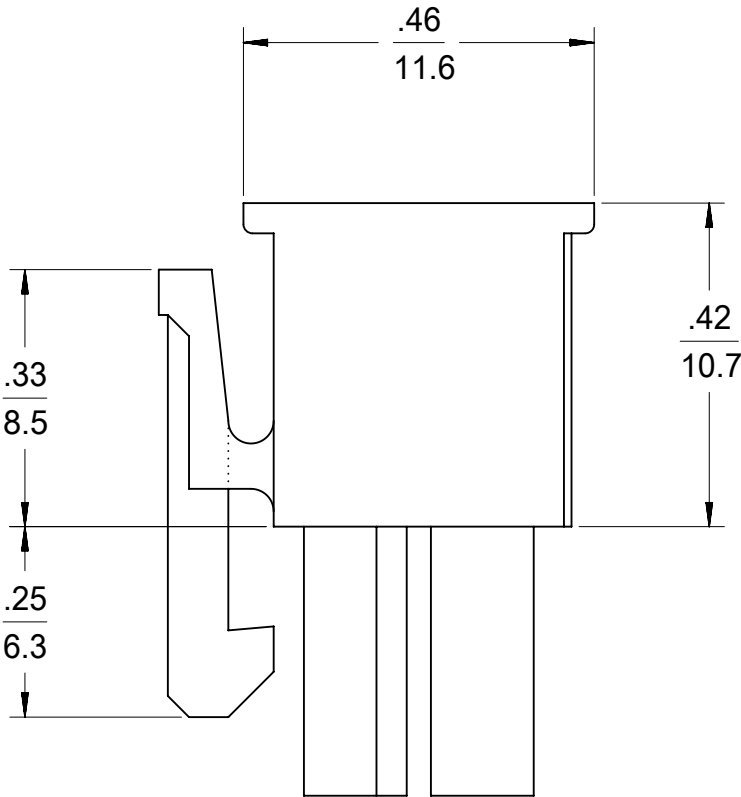


4 CKT SHOWN

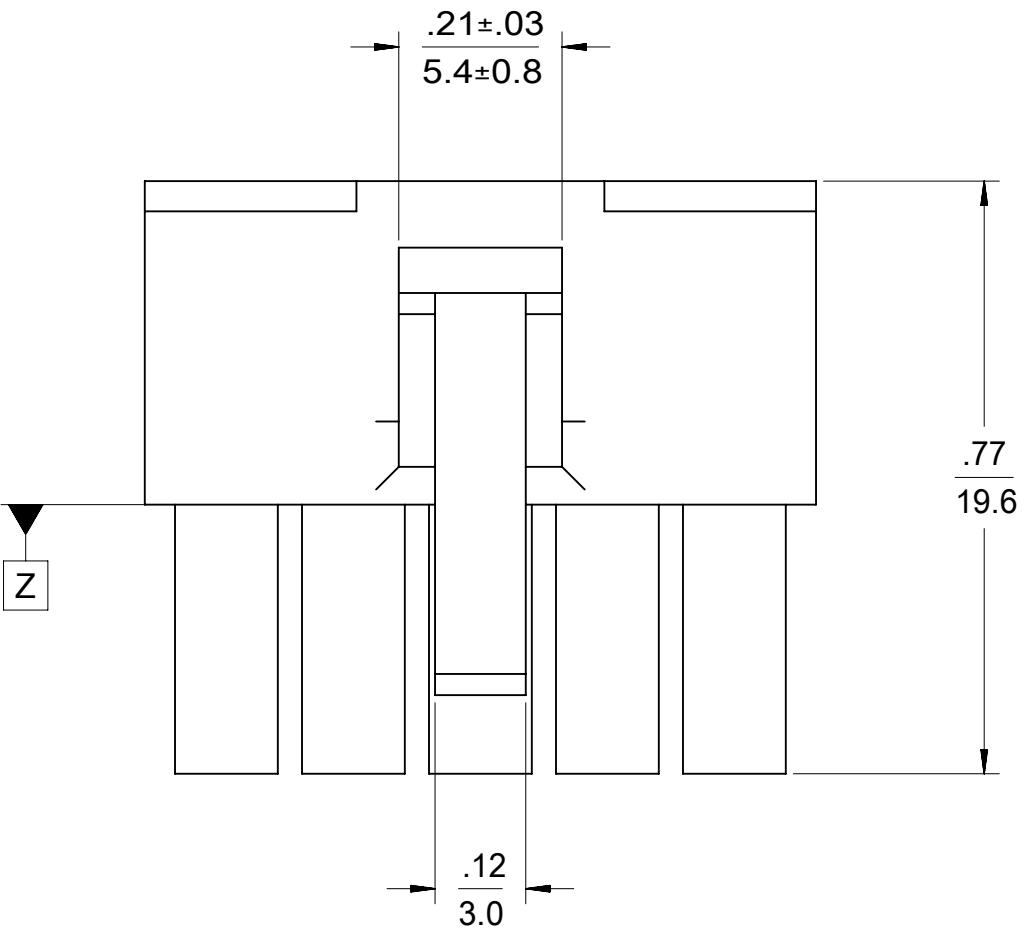

4-24 CKT

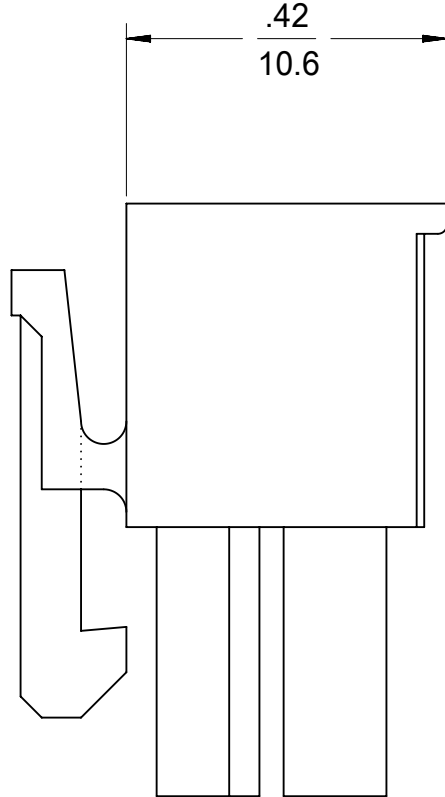

2 CKT ONLY

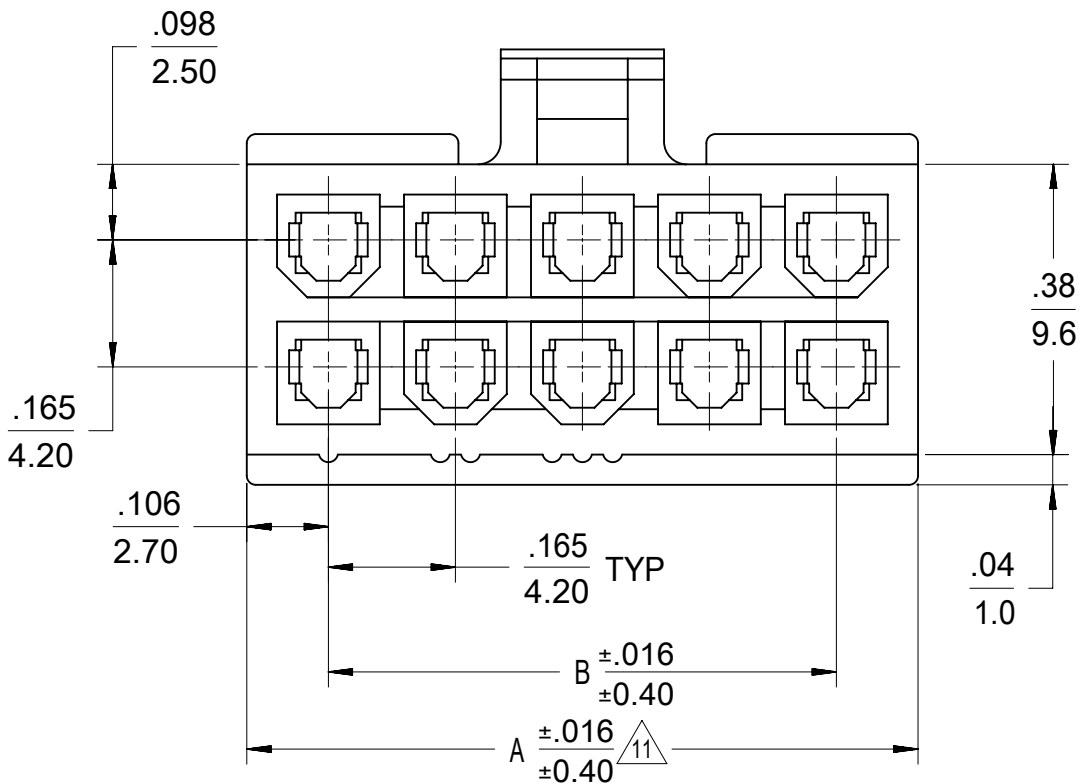

LEGEND


46992 - * * * 0

CIRCUIT SIZE

MATERIAL
(SEE NOTE 1)
0 = 225NS
1 = 225S
2 = 250RS
3 = 250GS
4 = 250BS
5 = 250WS

CONFIGURATION
DUAL ROW

- NOTES:
- 1) MATERIAL:
- 225S = NYLON 6, UL94V-2, GLOW WIRE MATERIAL COLOR: BLACK
- 225NS = NYLON 6, UL94V-2, GLOW WIRE MATERIAL COLOR: NATURAL
- 250RS = NYLON 6/6, UL94V-0, GLOW WIRE MATERIAL COLOR: RED
- 250GS = NYLON 6/6, UL94V-0, GLOW WIRE MATERIAL COLOR: GREEN
- 250BS = NYLON 6/6, UL94V-0, GLOW WIRE MATERIAL COLOR: BLUE
- 250WS = NYLON 6/6, UL94V-0, GLOW WIRE MATERIAL COLOR: NATURAL
- 2) FINISH: NOT APPLICABLE
- 3) PRODUCT SPECIFICATION: PS-5556-001
- 4) PACKAGING: BULK
- 5) PART MATES WITH MOLEX PLUG #46993 AND HEADERS #172447, #172448.
- 6) PART TO BE USED WITH MOLEX FEMALE TERMINAL #5556.
- 7) PART IS NOT DESIGNED FOR CURRENT SHARING.
- 8) CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
- 9) WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
- 10) PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002 WITH THE EXCEPTION OF DISCOLORATION, FLASH AND SINK MEET CLASS "C" REQUIREMENTS.
- 11) TO BE MEASURED AT SURFACE Z
- 12) TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.
- 13) APPLICATION SPECIFICATION :469920000-AS.
- 14) BUBBLE IS ACCEPTABLE ON LATCH AREA.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex MINIFIT JR RECEPTACLE HOUSING DUAL ROW, 2-24 CKT						
mm		NTS												
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 719028 DRWN: JERRYW8 2022/08/23 CHK'D: XQZHANG 2022/09/01 APPR: XQZHANG 2022/09/01				PRODUCT CUSTOMER DRAWING						
		MM											INCH	
4 PLACES		±											±	
3 PLACES		±											± 0.01	
2 PLACES		± 0.25											± 0.015	
1 PLACE		± 0.38		±		INITIAL REVISION: DRWN: NNGUYEN 2013/04/12 APPR: FSMITH 2014/05/16				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
0 PLACES		±		SD-46992-0000						PSD	000	A9		
ANGULAR TOL		± 3.0 °												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
						C-SIZE	46992	SEE TABLE		GENERAL MARKET		1 OF 2		

