


LOC	DIST	REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	APVD
		F2		REVISED PER ECO-11-004820	11MAR11	RK HMR

D

C

B

A

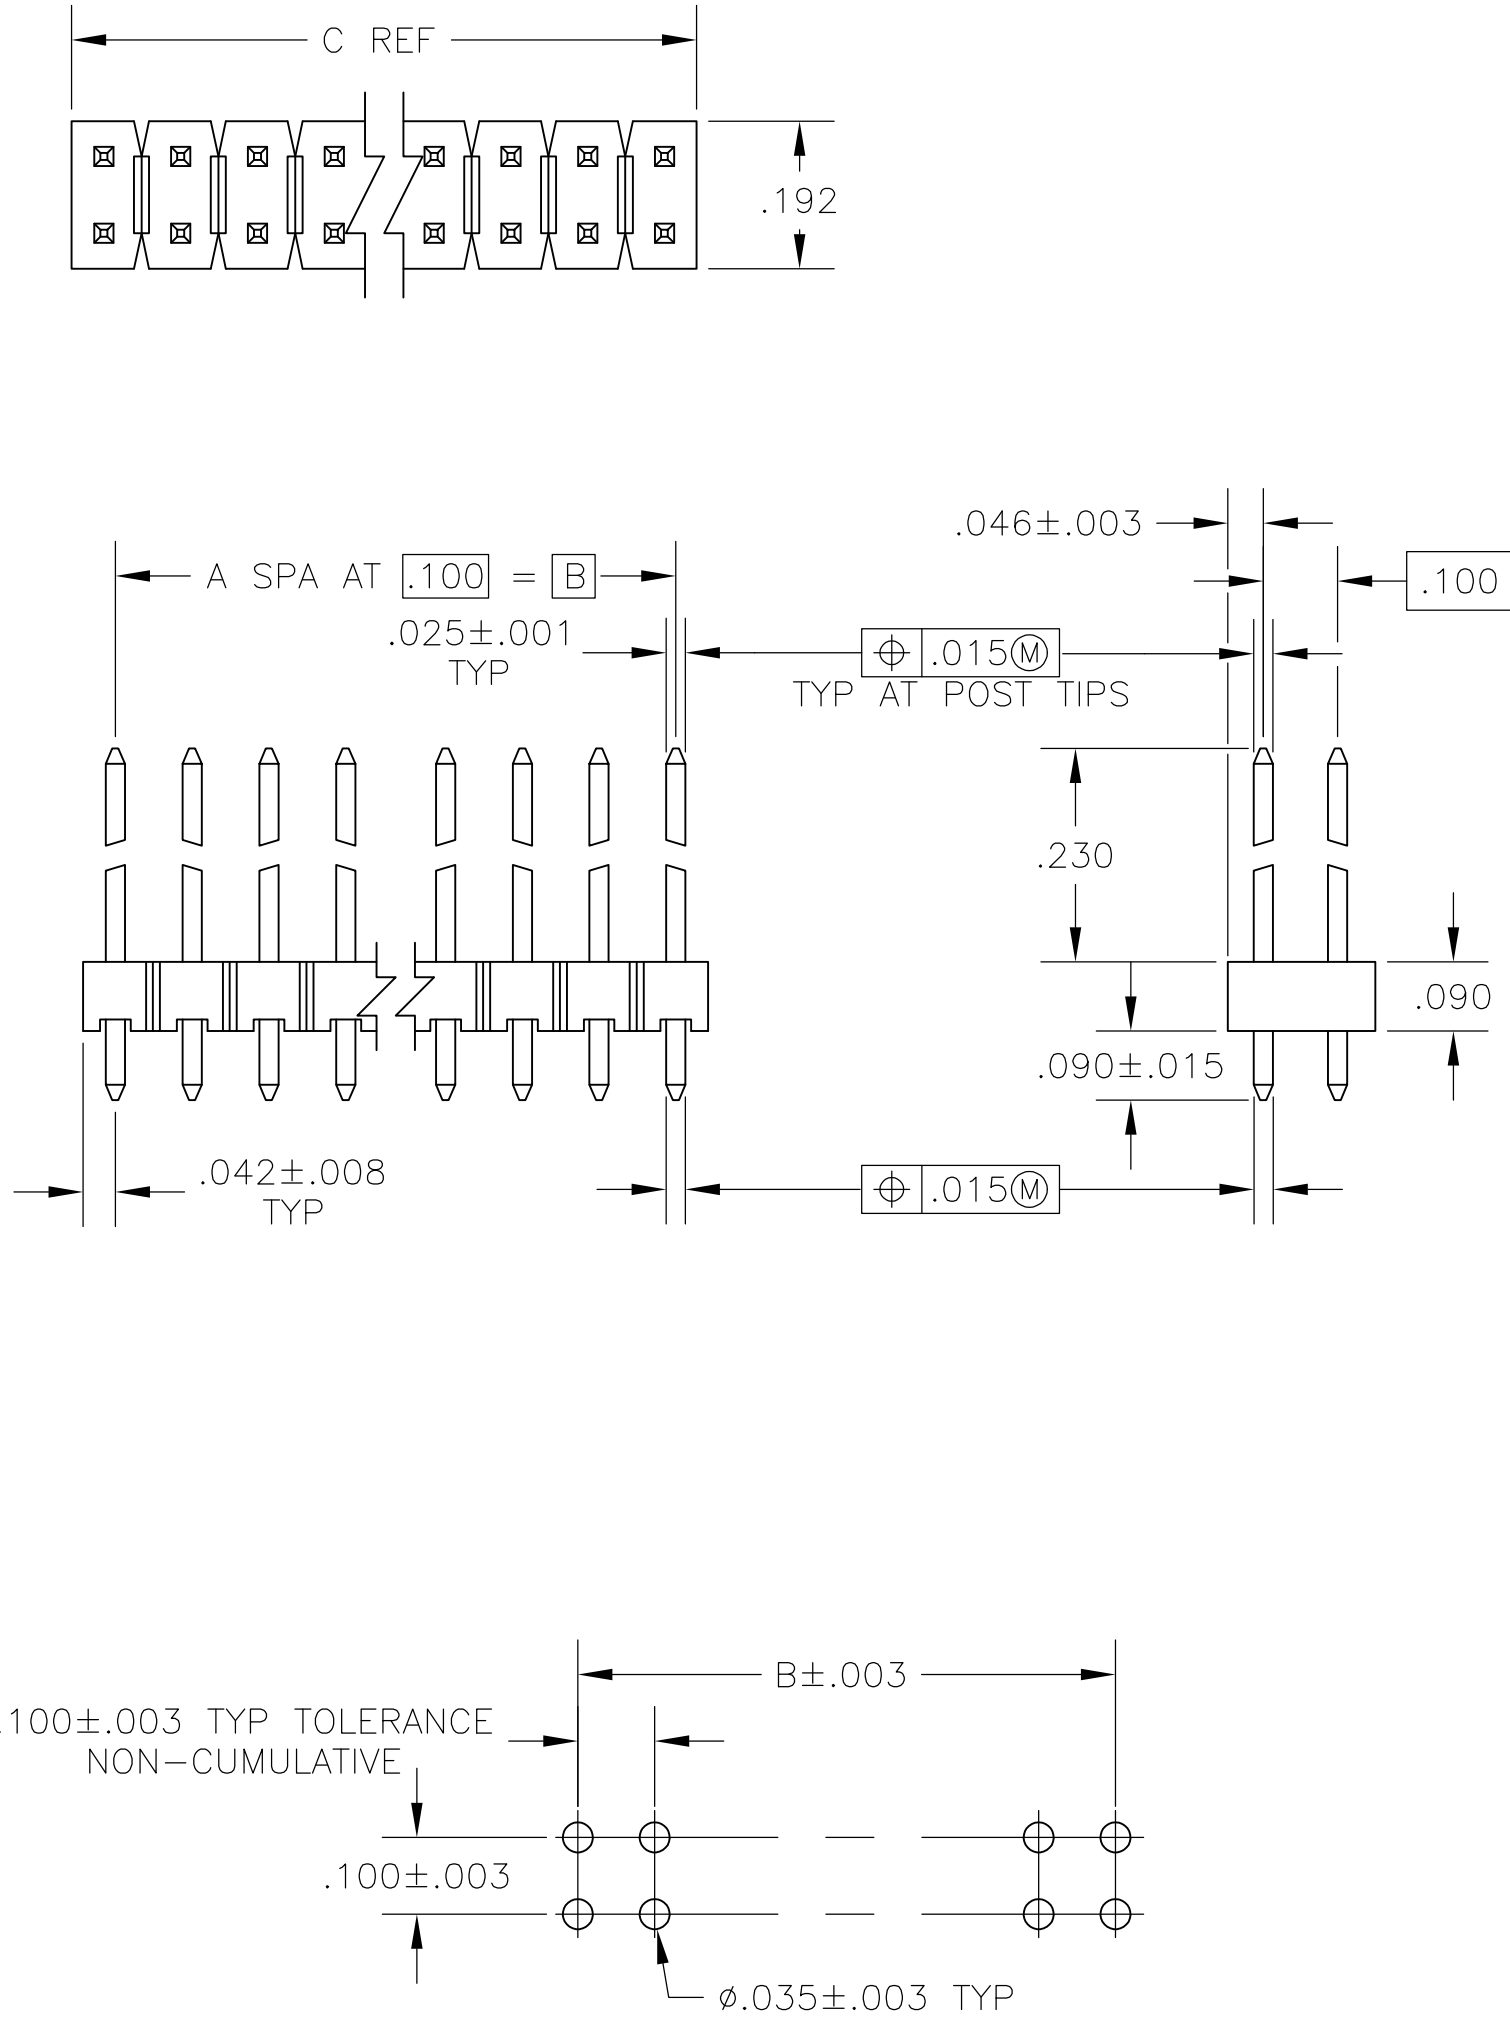

RECOMMENDED HOLE LAYOUT

- 1
- ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
- 4
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

4
OBSOLETE

4
OBSOLETE

3.984	3.900	39	80	4-103777-0
3.884	3.800	38	78	3- -9
3.784	3.700	37	76	3- -8
3.684	3.600	36	74	3- -7
3.584	3.500	35	72	3- -6
3.484	3.400	34	70	3- -5
3.284	3.300	33	68	3- -4
3.284	3.200	32	66	3- -3
3.184	3.100	31	64	3- -2
3.084	3.000	30	62	3- -1
2.984	2.900	29	60	3- -0
2.884	2.800	28	58	2- -9
2.784	2.700	27	56	2- -8
2.684	2.600	26	54	2- -7
2.584	2.500	25	52	2- -6
2.484	2.400	24	50	2- -5
2.384	2.300	23	48	2- -4
2.284	2.200	22	46	2- -3
2.184	2.100	21	44	2- -2
2.084	2.000	20	42	2- -1
1.984	1.900	19	40	2- -0
1.884	1.800	18	38	1- -9
1.784	1.700	17	36	1- -8
1.684	1.600	16	34	1- -7
1.584	1.500	15	32	1- -6
1.484	1.400	14	30	1- -5
1.384	1.300	13	28	1- -4
1.284	1.200	12	26	1- -3
1.184	1.100	11	24	1- -2
1.084	1.000	10	22	1- -1
.984	.900	9	20	1- -0
.884	.800	8	18	- -9
.784	.700	7	16	- -8
.684	.600	6	14	- -7
.584	.500	5	12	- -6
.484	.400	4	10	- -5
.384	.300	3	8	- -4
.284	.200	2	6	- -3
.184	.100	1	4	- -2
.084	-	-	2	103777-1
C	B	A	NO OF POS	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. RINGLEY 7-25-85	TE Connectivity		
DIMENSIONS: INCHES		CHK R. ELICKER 7-25-85			
		APVD R. ELICKER 7-25-85	NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, .100X .100 C/L, WITH .025 SQUARE POSTS		
		PRODUCT SPEC			
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		FINISH			
MATERIAL HOUSING, FLAME RETARDANT THERMOPLASTIC COLOR-BLACK POST: PHOSPHOR BRONZE		WEIGHT -	A2	00779	C=103777
POSTS 3		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1 REV F2