

Metallized Polyester (PET) Capacitors in PCM 7.5 mm to 52.5 mm. Capacitances from 1000 pF to 680 µF. Rated Voltages from 50 VDC to 2000 VDC.

Special Features

- High volume/capacitance ratio
- Self-healing
- AEC-Q200 qualified for PCM ≤ 37.5 mm (for larger box sizes on request)
- According to RoHS 2011/65/EU

Typical Applications

For general DC-applications e.g.

- By-pass
- Blocking
- Coupling and decoupling
- Smoothing
- Timing

Construction


Dielectric:

Polyethylene-terephthalate (PET) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

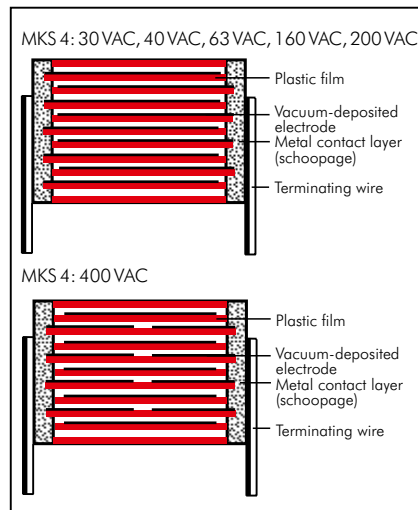

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.

Electrical Data

Capacitance range:

1000 pF to 680 µF

Rated voltages:

50 VDC, 63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC, 1000 VDC, 1500 VDC, 2000 VDC

Capacitance tolerances:

±20%, ±10% ±5%

Operating temperature range:

$U_r = 50$ VDC: -55° C to +105° C

$U_r \geq 63$ VDC: -55° C to +125° C

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at +20° C:

U_r	U_{test}	$C \leq 0.33 \mu F$	$0.33 \mu F < C \leq 680 \mu F$
50 VDC	10 V	$\geq 5 \times 10^3 M\Omega$	$\geq 1500 \text{ sec } (M\Omega \times \mu F)$
63 VDC	50 V	$\geq 1 \times 10^4 M\Omega$	$\geq 3000 \text{ sec } (M\Omega \times \mu F)$
100 VDC	100 V	$\geq 1.5 \times 10^4 M\Omega$	$\geq 5000 \text{ sec } (M\Omega \times \mu F)$
≥ 250 VDC	100 V	$\geq 3 \times 10^4 M\Omega$	$\geq 10000 \text{ sec } (M\Omega \times \mu F)$

Measuring time: 1 min.

Dissipation factors at +20° C: $\tan \delta$

at f	$C \leq 0.1 \mu F$	$0.1 \mu F < C \leq 1.0 \mu F$	$C > 1.0 \mu F$
1 kHz	$\leq 8 \times 10^{-3}$	$\leq 8 \times 10^{-3}$	$\leq 10 \times 10^{-3}$
10 kHz	$\leq 15 \times 10^{-3}$	$\leq 15 \times 10^{-3}$	-
100 kHz	$\leq 30 \times 10^{-3}$	-	-

Maximum pulse rise time:

Capacitance pF/µF	50VDC	63VDC	100VDC	250VDC	400VDC	630VDC	1000VDC	1500VDC	2000VDC
1000 ... 6800	-	-	-	-	-	-	70	90	100
0.01 ... 0.022	-	-	30	35	38	40	50	50	60
0.033 ... 0.068	-	-	15	20	25	32	26	35	40
0.1 ... 0.22	10	10	12	15	15	17	20	35	40
0.33 ... 0.68	9	9	9	10	10	13	20	20	38
1.0 ... 2.2	6	6	5	6	9	13	14	15	15
3.3 ... 6.8	2.5	3	3	6	6	9	12	12	12
10 ... 22	2.5	2.5	2.5	3	6	6	6	-	-
33 ... 68	2.5	2.5	2.5	3	3	-	-	-	-
100 ... 220	2.5	2.5	2.5	0.9	-	-	-	-	-
330 ... 680	0.2	0.2	0.3	-	-	-	-	-	-

Mechanical Tests

Pull test on pins:

$d \leq 0.8 \phi$: 10 N in direction of pins

$d > 0.8 \phi$: 20 N in direction of pins

according to IEC 60068-2-21

Vibration: 6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density: 1kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test: 4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	50 VDC/30 VAC*					63 VDC/40 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.1 µF	2.5	7	10	7.5	MKS4B031002A_-----	2.5	7	10	7.5	MKS4C031002A_-----
0.15 "	2.5	7	10	7.5	MKS4B031502A_-----	4	9	13	10	MKS4C031003C_-----
0.22 "	2.5	7	10	7.5	MKS4B032202A_-----	2.5	7	10	7.5	MKS4C031502A_-----
0.33 "	2.5	7	10	7.5	MKS4B033302A_-----	4	9	13	10	MKS4C031503C_-----
0.47 "	3	8.5	10	7.5	MKS4B034702B_-----	3	8.5	10	7.5	MKS4C032202B_-----
0.68 "	4	9	10	7.5	MKS4B036802C_-----	4	9	13	10	MKS4C032203C_-----
1.0 µF	4	9	10	7.5	MKS4B041002C_-----	4	9	10	7.5	MKS4C033302C_-----
1.5 "	5	10.5	10.3	7.5	MKS4B041502E_-----	4	9	13	10	MKS4C033303C_-----
2.2 "	5.7	12.5	10.3	7.5	MKS4B042202F_-----	4	9	10	7.5	MKS4C034702C_-----
3.3 "	5.7	12.5	10.3	7.5	MKS4B043302F_-----	4	9	13	10	MKS4C034703C_-----
4.7 "	7.2	12.5	10.3	7.5	MKS4B044702G_-----	5	10.5	10.3	7.5	MKS4C036802E_-----
6.8 "	6	12	13	10	MKS4B044703G_-----	4	9	13	10	MKS4C036803C_-----
	7.2	12.5	10.3	7.5	MKS4B046802G_-----	5	10.5	10.3	7.5	MKS4C041002E_-----
	6	12	13	10	MKS4B046803G_-----	4	9	13	10	MKS4C041003C_-----
10 µF	9	16	18	15	MKS4B051004J_-----	5.7	12.5	10.3	7.5	MKS4C041502F_-----
15 "	11	21	26.5	22.5	MKS4B051505I_-----	5	11	13	10	MKS4C041503F_-----
18 "	9	19	31.5	27.5	MKS4B051806A_-----	5	11	13	10	MKS4C042203F_-----
22 "	11	21	31.5	27.5	MKS4B052206B_-----	6	12.5	18	15	MKS4C042204C_-----
27 "	11	21	31.5	27.5	MKS4B052706B_-----	6	12	13	10	MKS4C043303G_-----
33 "	13	24	31.5	27.5	MKS4B053306D_-----	7	14	18	15	MKS4C043304D_-----
39 "	15	26	31.5	27.5	MKS4B053906F_-----	7	14	18	15	MKS4C044704D_-----
47 "	15	26	31.5	27.5	MKS4B054706F_-----	6	15	26.5	22.5	MKS4C044705B_-----
56 "	17	29	31.5	27.5	MKS4B055606G_-----	8	15	18	15	MKS4C046804F_-----
68 "	20	39.5	31.5	27.5	MKS4B056806J_-----	7	16.5	26.5	22.5	MKS4C046805D_-----
82 "	17	34.5	31.5	27.5	MKS4B058206I_-----	8.5	18.5	26.5	22.5	MKS4C051005F_-----
100 µF	19	32	41.5	37.5	MKS4B061007F_-----	9	19	31.5	27.5	MKS4C051006A_-----
120 "	20	39.5	41.5	37.5	MKS4B061207G_-----	11	21	26.5	22.5	MKS4C051505I_-----
150 "	20	39.5	41.5	37.5	MKS4B061507G_-----	9	19	31.5	27.5	MKS4C051506A_-----
180 "	24	45.5	41.5	37.5	MKS4B061807H_-----	9	19	31.5	27.5	MKS4C051806A_-----
220 "	24	45.5	41.5	37.5	MKS4B062207H_-----	11	21	31.5	27.5	MKS4C052206B_-----
270 "	31	46	41.5	37.5	MKS4B062707I_-----	11	21	31.5	27.5	MKS4C052706B_-----
330 "	35	50	41.5	37.5	MKS4B063307J_-----	13	24	31.5	27.5	MKS4C053306D_-----
390 "	40	55	41.5	37.5	MKS4B063907K_-----	15	26	31.5	27.5	MKS4C053906F_-----
470 "	35	50	57	52.5	MKS4B064709F_-----	15	26	31.5	27.5	MKS4C054706F_-----
560 "	45	55	57	52.5	MKS4B065609H_-----	13	24	41.5	37.5	MKS4C054707C_-----
680 "	45	55	57	52.5	MKS4B066809H_-----	17	29	31.5	27.5	MKS4C055606G_-----
						15	26	41.5	37.5	MKS4C055607D_-----
						17	34.5	31.5	27.5	MKS4C056806I_-----
						15	26	41.5	37.5	MKS4C056807D_-----
						17	34.5	31.5	27.5	MKS4C058206I_-----
						17	29	41.5	37.5	MKS4C058207E_-----
						20	39.5	31.5	27.5	MKS4C061006J_-----
						19	32	41.5	37.5	MKS4C061007F_-----
						20	39.5	41.5	37.5	MKS4C061207G_-----
						20	39.5	41.5	37.5	MKS4C061507G_-----
						24	45.5	41.5	37.5	MKS4C061807H_-----
						28	38	41.5	37.5	MKS4C061807L_-----
						31	46	41.5	37.5	MKS4C062207I_-----
						25	45	57	52.5	MKS4C062209D_-----
						31	46	41.5	37.5	MKS4C062707I_-----
						25	45	57	52.5	MKS4C062709D_-----
						35	50	41.5	37.5	MKS4C063307J_-----
						30	45	57	52.5	MKS4C063309E_-----
						40	55	41.5	37.5	MKS4C063907K_-----
						30	45	57	52.5	MKS4C063909E_-----
						35	50	57	52.5	MKS4C064709F_-----
						45	55	57	52.5	MKS4C065609H_-----
						45	65	57	52.5	MKS4C066809J_-----

* AC voltages: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

New values and box sizes. Box sizes according to main catalogue 2019 are still available on request.

** PCM = printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation page 53

Continuation

General Data

Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF	2.5	7	10	7.5	MKS4D021002A	3	8.5	10	7.5	MKS4F021002B
	4	9	13	10	MKS4D021003C	4	9	13	10	MKS4F021003C
0.015 "	2.5	7	10	7.5	MKS4D021502A	3	8.5	10	7.5	MKS4F021502B
	4	9	13	10	MKS4D021503C	4	9	13	10	MKS4F021503C
0.022 "	2.5	7	10	7.5	MKS4D022202A	3	8.5	10	7.5	MKS4F022202B
	4	9	13	10	MKS4D022203C	4	9	13	10	MKS4F022203C
0.033 "	2.5	7	10	7.5	MKS4D023302A	3	8.5	10	7.5	MKS4F023302B
	4	9	13	10	MKS4D023303C	4	9	13	10	MKS4F023303C
0.047 "	2.5	7	10	7.5	MKS4D024702A	3	8.5	10	7.5	MKS4F024702B
	4	9	13	10	MKS4D024703C	4	9	13	10	MKS4F024703C
0.068 "	2.5	7	10	7.5	MKS4D026802A	4	9	10	7.5	MKS4F026802C
	4	9	13	10	MKS4D026803C	4	9	13	10	MKS4F026803C
0.1 μF	2.5	7	10	7.5	MKS4D031002A	4	9	10	7.5	MKS4F031002C
	4	9	13	10	MKS4D031003C	4	9	13	10	MKS4F031003C
0.15 "	3	8.5	10	7.5	MKS4D031502B	5	10.5	10.3	7.5	MKS4F031502E
	4	9	13	10	MKS4D031503C	4	9	13	10	MKS4F031503C
0.22 "	3	8.5	10	7.5	MKS4D032202B	5	10.5	10.3	7.5	MKS4F032202E
	4	9	13	10	MKS4D032203C	5	11	13	10	MKS4F032203F
0.33 "	4	9	10	7.5	MKS4D033302C	5.7	12.5	10.3	7.5	MKS4F033302F
	4	9	13	10	MKS4D033303C	5	11	13	10	MKS4F033303F
0.47 "	4.5	9.5	10.3	7.5	MKS4D034702D	6	12	13	10	MKS4F034703G
	4	9	13	10	MKS4D034703C	6	12.5	18	15	MKS4F034704C
0.68 "	5	10.5	10.3	7.5	MKS4D036802E	7	14	18	15	MKS4F036804D
	4	9	13	10	MKS4D036803C					
1.0 μF	5.7	12.5	10.3	7.5	MKS4D041002F	8	15	18	15	MKS4F041004F
	5	11	13	10	MKS4D041003F	6	15	26.5	22.5	MKS4F041005B
1.5 "	6	12	13	10	MKS4D041503G	9	16	18	15	MKS4F041504J
	7	14	18	15	MKS4D041504D	7	16.5	26.5	22.5	MKS4F041505D
2.2 "	8	15	18	15	MKS4D042204F	10.5	19	26.5	22.5	MKS4F042205G
	6	15	26.5	22.5	MKS4D042205B	9	19	31.5	27.5	MKS4F042206A
3.3 "	9	16	18	15	MKS4D043304J	11	21	26.5	22.5	MKS4F043305I
	7	16.5	26.5	22.5	MKS4D043305D	11	21	31.5	27.5	MKS4F043306B
4.7 "	10.5	19	26.5	22.5	MKS4D044705G	11	21	31.5	27.5	MKS4F044706B
	9	19	31.5	27.5	MKS4D044706A					
6.8 "	10.5	19	26.5	22.5	MKS4D046805G	13	24	31.5	27.5	MKS4F046806D
	11	21	31.5	27.5	MKS4D046806B					
10 μF	9	19	31.5	27.5	MKS4D051006A	17	29	31.5	27.5	MKS4F051006G
						15	26	41.5	37.5	MKS4F051007D
15 "	11	21	31.5	27.5	MKS4D051506B	17	34.5	31.5	27.5	MKS4F051506I
						17	29	41.5	37.5	MKS4F051507E
18 "	11	21	31.5	27.5	MKS4D051806B	20	39.5	31.5	27.5	MKS4F051806J
						19	32	41.5	37.5	MKS4F051807F
22 "	13	24	31.5	27.5	MKS4D052206D	20	39.5	41.5	37.5	MKS4F052207G
27 "	15	26	31.5	27.5	MKS4D052706F	20	39.5	41.5	37.5	MKS4F052707G
33 "	15	26	31.5	27.5	MKS4D053306F	24	45.5	41.5	37.5	MKS4F053307H
	13	24	41.5	37.5	MKS4D053307C					
39 "	17	29	31.5	27.5	MKS4D053906G	24	45.5	41.5	37.5	MKS4F053907H
	15	26	41.5	37.5	MKS4D053907D					
47 "	17	34.5	31.5	27.5	MKS4D054706I	28	38	41.5	37.5	MKS4F054707L
	17	29	41.5	37.5	MKS4D054707E					
56 "	20	39.5	31.5	27.5	MKS4D055606J	35	50	41.5	37.5	MKS4F055607J
	17	29	41.5	37.5	MKS4D055607E	25	45	57	52.5	MKS4F055609D
68 "	20	39.5	31.5	27.5	MKS4D056806J	35	50	41.5	37.5	MKS4F056807J
	19	32	41.5	37.5	MKS4D056807F	30	45	57	52.5	MKS4F056809E
82 "	20	39.5	41.5	37.5	MKS4D058207G	40	55	41.5	37.5	MKS4F058207K
						35	50	57	52.5	MKS4F058209F
100 μF	20	39.5	41.5	37.5	MKS4D061007G	45	55	57	52.5	MKS4F061009H
120 "	24	45.5	41.5	37.5	MKS4D061207H	45	55	57	52.5	MKS4F061209H
150 "	31	46	41.5	37.5	MKS4D061507I	45	65	57	52.5	MKS4F061509J
180 "	31	46	41.5	37.5	MKS4D061807I					
	25	45	57	52.5	MKS4D061809H					
220 "	35	50	41.5	37.5	MKS4D062207J					
	30	45	57	52.5	MKS4D062209E					
270 "	40	55	41.5	37.5	MKS4D062707K					
	35	50	57	52.5	MKS4D062709F					
330 "	45	55	57	52.5	MKS4D063309H					
390 "	45	55	57	52.5	MKS4D063909H					
470 "	45	65	57	52.5	MKS4D064709J					

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

New values and box sizes.

**PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	400 VDC/200 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF	3	8.5	10	7.5	MKS4G021002B_	3	8.5	10	7.5*	MKS4J021002B_
	4	9	13	10	MKS4G021003C_	4	9	13	10	MKS4J021003C_
0.015 "	3	8.5	10	7.5	MKS4G021502B_	4	9	10	7.5*	MKS4J021502C_
	4	9	13	10	MKS4G021503C_	4	9	13	10	MKS4J021503C_
0.022 "	4	9	10	7.5	MKS4G022202C_	4.5	9.5	10.3	7.5*	MKS4J022202D_
	4	9	13	10	MKS4G022203C_	4	9	13	10	MKS4J022203C_
0.033 "	4	9	10	7.5	MKS4G023302C_	5	10.5	10.3	7.5*	MKS4J023302E_
	4	9	13	10	MKS4G023303C_	5	11	13	10	MKS4J023303F_
0.047 "	5	10.5	10.3	7.5	MKS4G024702E_	5.7	12.5	10.3	7.5*	MKS4J024702F_
	4	9	13	10	MKS4G024703C_	6	12	13	10	MKS4J024703G_
0.068 "	5	10.5	10.3	7.5	MKS4G026802E_	6	12	13	10	MKS4J026803G_
	4	9	13	10	MKS4G026803C_	5	11	18	15	MKS4J026804B_
0.1 μF	5	10.5	10.3	7.5	MKS4G031002E_	6	12.5	18	15	MKS4J031004C_
	5	11	13	10	MKS4G031003F_	6	15	26.5	22.5	MKS4J031005B_
0.15 "	5.7	12.5	10.3	7.5	MKS4G031502F_	7	14	18	15	MKS4J031504D_
	6	12	13	10	MKS4G031503G_	6	15	26.5	22.5	MKS4J031505B_
0.22 "	6	12	13	10	MKS4G032203G_	8	15	18	15	MKS4J032204F_
	6	12.5	18	15	MKS4G032204C_	6	15	26.5	22.5	MKS4J032205B_
0.33 "	8	15	18	15	MKS4G033304F_	7	16.5	26.5	22.5	MKS4J033305D_
						9	19	31.5	27.5	MKS4J033306A_
0.47 "	8	15	18	15	MKS4G034704F_	10.5	19	26.5	22.5	MKS4J034705G_
	6	15	26.5	22.5	MKS4G034705B_	9	19	31.5	27.5	MKS4J034706A_
0.68 "	7	16.5	26.5	22.5	MKS4G036805D_	11	21	26.5	22.5	MKS4J036805I_
						11	21	31.5	27.5	MKS4J036806B_
1.0 μF	10.5	19	26.5	22.5	MKS4G041005G_	11	21	31.5	27.5	MKS4J041006B_
	11	21	31.5	27.5	MKS4G041006B_					
1.5 "	11	21	26.5	22.5	MKS4G041505I_	15	26	31.5	27.5	MKS4J041506F_
	11	21	31.5	27.5	MKS4G041506B_					
2.2 "	11	21	31.5	27.5	MKS4G042206B_	17	34.5	31.5	27.5	MKS4J042206I_
						15	26	41.5	37.5	MKS4J042207D_
3.3 "	13	24	31.5	27.5	MKS4G043306D_	20	39.5	31.5	27.5	MKS4J043306J_
						19	32	41.5	37.5	MKS4J043307F_
4.7 "	17	29	31.5	27.5	MKS4G044706G_	20	39.5	41.5	37.5	MKS4J044707G_
6.8 "	17	34.5	31.5	27.5	MKS4G046806I_	24	45.5	41.5	37.5	MKS4J046807H_
	15	26	41.5	37.5	MKS4G046807D_					
10 μF	19	32	41.5	37.5	MKS4G051007F_	35	50	41.5	37.5	MKS4J051007J_
15 "	20	39.5	41.5	37.5	MKS4G051507G_	40	55	41.5	37.5	MKS4J051507K_
18 "	31	46	41.5	37.5	MKS4G051807I_	45	55	57	52.5	MKS4J051809H_
22 "	31	46	41.5	37.5	MKS4G052207I_	45	55	57	52.5	MKS4J052209H_
27 "	35	50	41.4	37.5	MKS4G052707J_					
33 "	35	50	41.5	37.5	MKS4G053307J_					
39 "	35	50	57	52.5	MKS4G053909F_					
47 "	35	50	57	52.5	MKS4G054709F_					
56 "	45	65	57	52.5	MKS4G055609J_					
68 "	45	65	57	52.5	MKS4G056809J_					

* AC voltages: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

New values

**PCM = printed circuit module = pin spacing

* Admissible AC voltage 250 VAC max.

Dims. in mm.

Rights reserved to amend design data without prior notification.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 161.		

Continuation page 55

Continuation

General Data

Capacitance	1000 VDC/400 VAC*					1500 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	3	8.5	10	7.5	MKS4O111002B_____	4	9	13	10	MKS4S011003C_____
	4	9	13	10	MKS4O111003C_____					
1500 "	3	8.5	10	7.5	MKS4O111502B_____	4	9	13	10	MKS4S011503C_____
	4	9	13	10	MKS4O111503C_____					
2200 "	3	8.5	10	7.5	MKS4O112202B_____	4	9	13	10	MKS4S012203C_____
	4	9	13	10	MKS4O112203C_____					
3300 "	4	9	10	7.5	MKS4O113302C_____	4	9	13	10	MKS4S013303C_____
	4	9	13	10	MKS4O113303C_____					
4700 "	4	9	10	7.5	MKS4O114702C_____	4	9	13	10	MKS4S014703C_____
	4	9	13	10	MKS4O114703C_____	5	11	18	15	MKS4S014704B_____
6800 "	4.5	9.5	10.3	7.5	MKS4O116802D_____	5	11	13	10	MKS4S016803F_____
	4	9	13	10	MKS4O116803C_____	5	11	18	15	MKS4S016804B_____
0.01 µF	5	10.5	10.3	7.5	MKS4O121002E_____	6	12	13	10	MKS4S021003G_____
	5	11	13	10	MKS4O121003F_____	5	11	18	15	MKS4S021004B_____
0.015 "	5.7	12.5	10.3	7.5	MKS4O121502F_____	6	12.5	18	15	MKS4S021504C_____
	6	12	13	10	MKS4O121503G_____					
0.022 "	5	11	18	15	MKS4O122204B_____	7	14	18	15	MKS4S022204D_____
						6	15	26.5	22.5	MKS4S022205B_____
0.033 "	6	12.5	18	15	MKS4O123304C_____	8	15	18	15	MKS4S023304F_____
	6	15	26.5	22.5	MKS4O123305B_____	6	15	26.5	22.5	MKS4S023305B_____
0.047 "	7	14	18	15	MKS4O124704D_____	7	16.5	26.5	22.5	MKS4S024705D_____
	6	15	26.5	22.5	MKS4O124705B_____					
0.068 "	8	15	18	15	MKS4O126804F_____	8.5	18.5	26.5	22.5	MKS4S026805F_____
	6	15	26.5	22.5	MKS4O126805B_____					
0.1 µF	9	16	18	15	MKS4O131004J_____	10.5	19	26.5	22.5	MKS4S031005G_____
	7	16.5	26.5	22.5	MKS4O131005D_____	9	19	31.5	27.5	MKS4S031006A_____
0.15 "	8.5	18.5	26.5	22.5	MKS4O131505F_____	11	21	31.5	27.5	MKS4S031506B_____
0.22 "	10.5	19	26.5	22.5	MKS4O132205G_____	13	24	31.5	27.5	MKS4S032206D_____
0.33 "	11	21	26.5	22.5	MKS4O133305I_____	17	34.5	31.5	27.5	MKS4S033306I_____
	11	21	31.5	27.5	MKS4O133306B_____	17	29	41.5	37.5	MKS4S033307E_____
0.47 "	13	24	31.5	27.5	MKS4O134706D_____	20	39.5	31.5	27.5	MKS4S034706J_____
						17	29	41.5	37.5	MKS4S034707E_____
0.68 "	15	26	31.5	27.5	MKS4O136806F_____	20	39.5	41.5	37.5	MKS4S036807G_____
1.0 µF	17	29	31.5	27.5	MKS4O141006G_____	24	45.5	41.5	37.5	MKS4S041007H_____
	17	29	41.5	37.5	MKS4O141007E_____					
1.5 "	19	32	41.5	37.5	MKS4O141507F_____	31	46	41.5	37.5	MKS4S041507I_____
2.2 "	20	39.5	41.5	37.5	MKS4O142207G_____	35	50	41.5	37.5	MKS4S042207J_____
						35	50	57	52.5	MKS4S042209F_____
3.3 "	24	45.5	41.5	37.5	MKS4O143307H_____	45	55	57	52.5	MKS4S043309H_____
4.7 "	35	50	41.5	37.5	MKS4O144707J_____	45	65	57	52.5	MKS4S044709J_____
6.8 "	40	55	41.5	37.5	MKS4O146807K_____					
	35	50	57	52.5	MKS4O146809F_____					
10 µF	45	55	57	52.5	MKS4O151009H_____					

* AC voltages: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = printed circuit module = pin spacing

Dims. in mm.

Part number completion:

Version code: 2-pin = 00
4-pin = D4

Tolerance: 20 % = M
10 % = K
5 % = J

Packing: bulk = S
Pin length: 6-2 = SD


Taped version see page 161.

Rights reserved to amend design data without prior notification.

Continuation page 56

Continuation

Impedance change with frequency
(general guide).

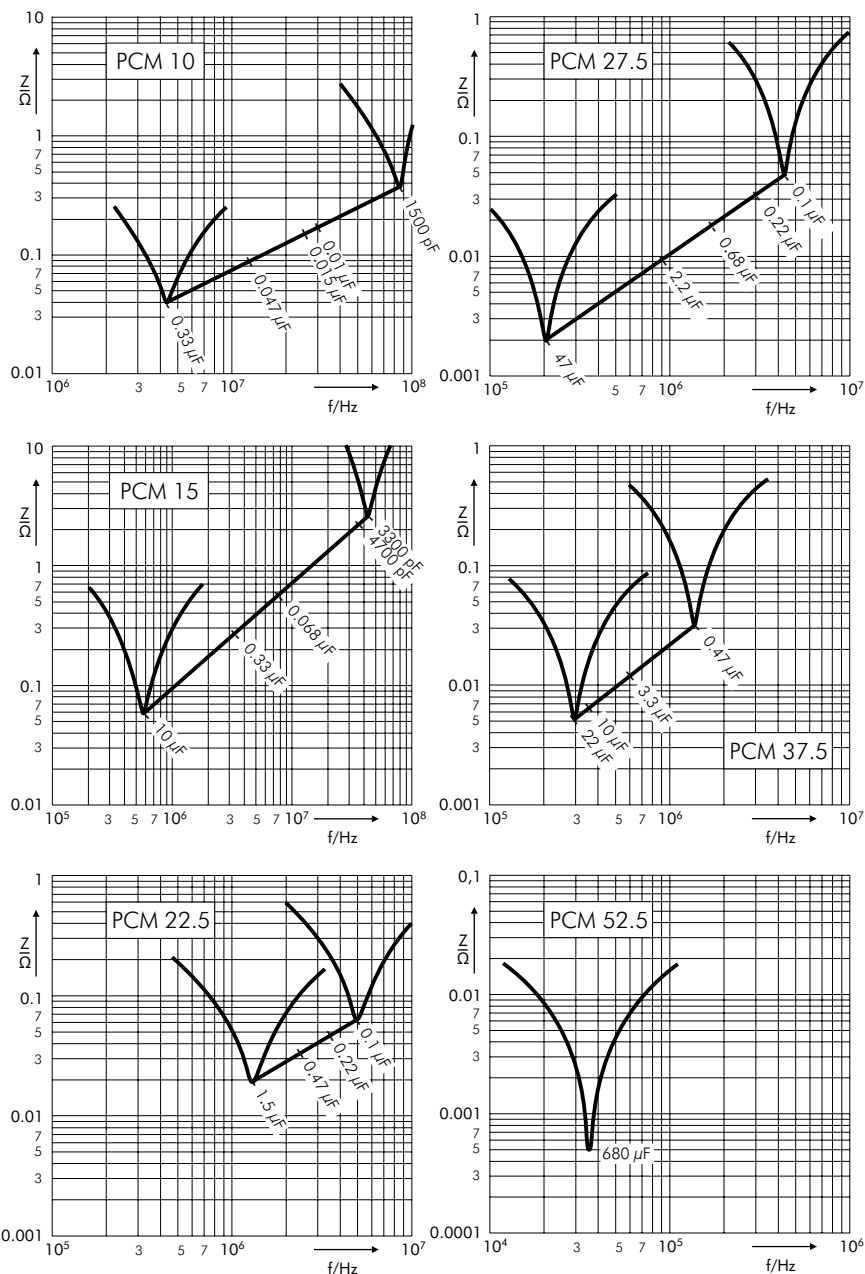

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

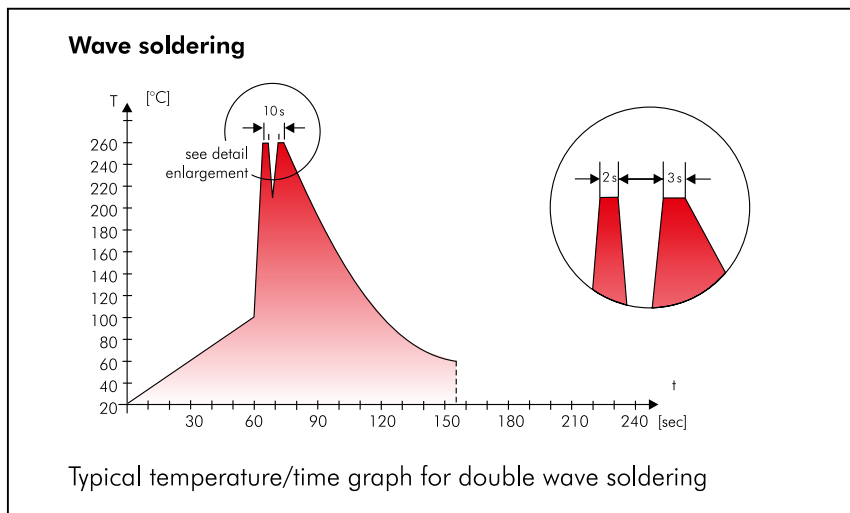

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the ifaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- | | |
|------------------------|------------|
| - Lead | - PBB/PBDE |
| - PCB | - Arsenic |
| - CFC | - Cadmium |
| - Hydrocarbon chloride | - Mercury |
| - Chromium 6+ | - etc. |

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

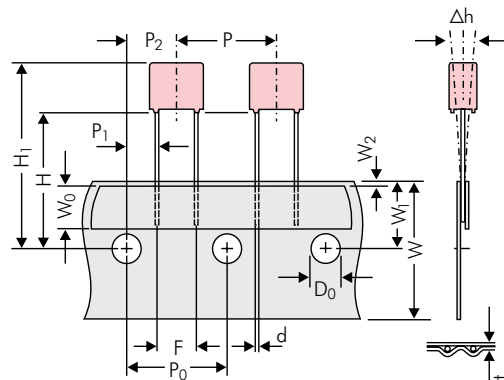


Diagram 1:
PCM 2.5/5/7.5mm

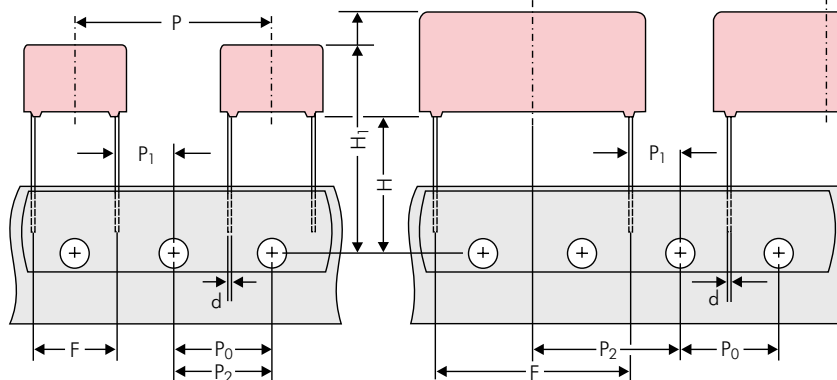


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 162)		ROLL/AMMO			AMMO			
		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions		REEL Ø 360 max. Ø 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL Ø 500 max. Ø 25 ±1	54 ±2 60 ±2 68 ±2 } depending on PCM and component dimensions
Unit		see details page 163.						

Dims in mm.

* Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

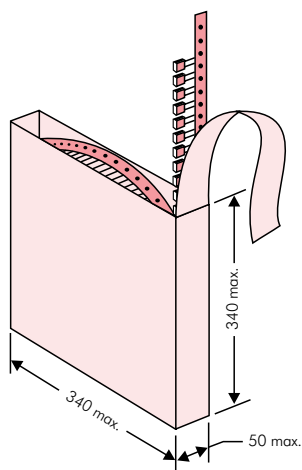

■ AMMO Packaging

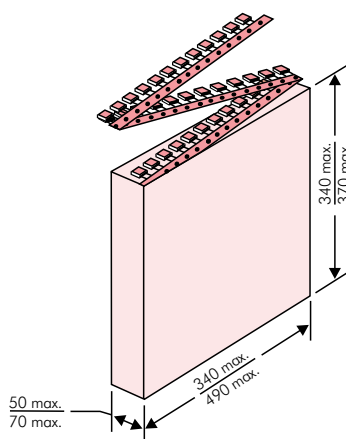

■ REEL Packaging

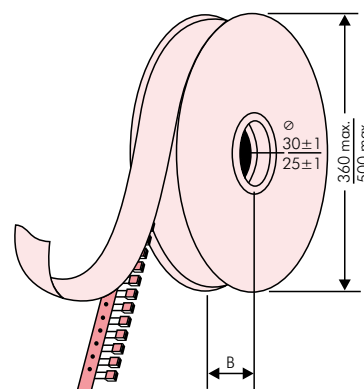

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

WIMA Best Capacitors Made in Germany	
Werk Aurich	
Supplier-ID: LIEF.NR.	Date Code: 20210419
	
Purchase Order No. (P/O): Bestellung xyz	P/O line: 100
	
Customer Part No.: KUNDENTEILENUMMER	
	
WIMA Part No.: MKP1F041006B00KSSD	Quantity: 459
	
WIMA Confirmation No.: 0001105072000100	
	
Customer No.: 0000100002	RoHS 2011/65/EU
Gross Weight [g]: 4557	COO: DE
	
WIMA – MKP 10 WIMA Part No.: MKP1F041006B00KSSD	
MKP 10 1.0 µF 250 VDC 11x21x31.5 RM27.5	
Standard 10% Lose – Standard Drähte 6-2	
Vorlage Debitor Inland	
	0001105072000100
1002021443	QTY: 459 Week 19/2021

BARCODE PDF417

BARCODE 2D Datamatrix

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	340 x 340	490 x 370	H16.5	H18.5	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000	2200		2500		–		2800		–	
	3	7.5	4.6	0C	5000	2000		2300		–		2300		–	
	3.8	8.5	4.6	0D	5000	1500		1800		–		1800		–	
	4.6	9	4.6	0E	5000	1200		1500		–		1500		–	
	5.5	10	4.6	0F	5000	900		1200		–		1200		–	
5 mm	2.5	6.5	7.2	1A	5000	2200		2500		–		2800		–	
	3	7.5	7.2	1B	5000	2000		2300		–		2300		–	
	3.5	8.5	7.2	1C	5000	1600		2000		–		2000		–	
	4.5	6	7.2	1D	6000	1300		1500		–		1500		–	
	4.5	9.5	7.2	1E	4000	1300		1500		–		1500		–	
	5	10	7.2	1F	3500	1100		1400		–		1400		–	
	5.5	7	7.2	1G	4000	1000		1200		–		1200		–	
	5.5	11.5	7.2	1H	2500	1000		1200		–		1200		–	
	6.5	8	7.2	1I	2500	800		1000		–		1000		–	
	7.2	8.5	7.2	1J	2500	700		1000		–		1000		–	
	7.2	13	7.2	1K	2000	700		950		–		1000		–	
	8.5	10	7.2	1L	2000	600		800		–		800		–	
	8.5	14	7.2	1M	1500	600		800		–		800		–	
	11	16	7.2	1N	1000	500		600		–		640		–	
7.5 mm	2.5	7	10	2A	5000	–		2500		4400		2500		–	
	3	8.5	10	2B	5000	–		2200		4300		2300		4150	
	4	9	10	2C	4000	–		1700		3200		1700		3000	
	4.5	9.5	10.3	2D	3500	–		1500		2900		1400		2700	
	5	10.5	10.3	2E	3000	–		1300		2500		1300		–	
	5.7	12.5	10.3	2F	2000	–		1000		2200		1100		–	
	7.2	12.5	10.3	2G	1500	–		900		1800		1000		–	
10 mm	3	9	13	3A	3000	–		1100		2200		–		1900	
	4	8.5	13.5	FA	3000	–		900		1600		–		1450	
	4	9	13	3C	3000	–		900		1600		–		1450	
	4	9.5	13	3D	3000	–		900		1600		–		1400	
	5	10	13.5	FB	2000	–		700		1300		–		1200	
	5	11	13	3F	3000	–		700		1300		–		1100	
	6	12	13	3G	2400	–		550		1100		–		1000	
	6	12.5	13	3H	2400	–		550		1100		–		1000	
15 mm	8	12	13	3I	2000	–		400		800		–		740	
	5	11	18	4B	2400	–		600		1200		–		1150	
	5	13	19	FC	1000	–		600		1200		–		1200	
	6	12.5	18	4C	2000	–		500		1000		–		1000	
	6	14	19	FD	1000	–		500		1000		–		1000	
	7	14	18	4D	1600	–		450		900		–		850	
	7	15	19	FE	1000	–		450		900		–		850	
	8	15	18	4F	1200	–		400		800		–		740	
	8	17	19	FF	500	–		400		800		–		740	
	9	14	18	4H	1200	–		350		700		–		650	
	9	16	18	4J	900	–		350		700		–		650	
22.5 mm	10	18	19	FG	500	–		300		650		–		590	
	11	14	18	4M	1000	–		300		600		–		540	
	5	14	26.5	5A	1200	–		–		800		–		770	
	6	15	26.5	5B	1000	–		–		700		–		640	
	7	16.5	26.5	5D	760	–		–		600		–		550	
	8	20	28	5H	500	–		–		500		–		480	
	8.5	18.5	26.5	5F	500	–		–		480		–		450	
22.5 mm	10	22	28	FI	570*	–		–		420		–		380	
	10.5	19	26.5	5G	594*	–		–		400		–		360	
	10.5	20.5	26.5	5H	594*	–		–		400		–		360	
	11	21	26.5	5I	561*	–		–		380		–		350	
	12	24	28	FJ	480*	–		–		350		–		310	

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370				
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*	–	–	–	–	460/340*	–	–	–	–	–
	11	21	31.5	6B	459*	–	–	–	–	380/280*	–	–	–	–	–
	13	24	31.5	6D	378*	–	–	–	–	300	–	–	–	–	–
	13	25	33	FK	405*	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	324*	–	–	–	–	270	–	–	–	–	–
	15	26	33	FL	324*	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	198*	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	198*	–	–	–	–	–	–	–	–	–	–
	20	32	33	FM	162*	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	162*	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	441*	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	357*	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	294*	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	252*	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	154*	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	140*	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	126*	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	112*	–	–	–	–	–	–	–	–	–	–
	28	38	41.5	7L	84*	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	84*	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	120*	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	80*	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	84*	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	25*	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–
52.5 mm	25	45	57	9D	70*	–	–	–	–	–	–	–	–	–	–
	30	45	57	9E	60*	–	–	–	–	–	–	–	–	–	–
	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
 Field 5 - 6: Rated voltage
 Field 7 - 10: Capacitance
 Field 11 - 12: Size and PCM
 Field 13 - 14: Version code (e.g. Snubber versions)
 Field 15: Capacitance tolerance
 Field 16: Packing
 Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μF			2.5x6.5x7.2			-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:			Size:					Tolerance:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022			4.8x3.3x3 Size 1812 = KA					±20% = M			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047			4.8x3.3x4 Size 1812 = KB					±10% = K			
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100			5.7x5.1x3.5 Size 2220 = QA					±5% = J			
FKP 02 = FKPO				250 VDC = F0		150 pF = 0150			5.7x5.1x4.5 Size 2220 = QB					±2.5% = H			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220			7.2x6.1x3 Size 2824 = TA					±1% = E			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330			7.2x6.1x5 Size 2824 = TB					...			
FKP 2 = FKP2				520 VDC = H2		470 pF = 0470			10.2x7.6x5 Size 4030 = VA								
FKS 3 = FKS3				600 VDC = I0		680 pF = 0680			12.7x10.2x6 Size 5040 = XA								
FKP 3 = FKPD				630 VDC = J0		1000 pF = 1100			15.3x13.7x7 Size 6054 = YA								
MKS 2 = MKS2				700 VDC = K0		1500 pF = 1150			2.5x7x4.6 PCM 2.5 = 0B								
MKP 2 = MKPD				800 VDC = L0		2200 pF = 1220			3x7.5x4.6 PCM 2.5 = 0C								
MKS 4 = MKS4				850 VDC = M0		3300 pF = 1330			2.5x6.5x7.2 PCM 5 = 1A								
MKP 4 = MKPD				900 VDC = N0		4700 pF = 1470			3x7.5x7.2 PCM 5 = 1B								
MKP 10 = MKP1				1000 VDC = O1		6800 pF = 1680			2.5x7x10 PCM 7.5 = 2A								
FKP 4 = FKPD				1100 VDC = P0		0.01 μF = 2100			3x8.5x10 PCM 7.5 = 2B								
FKP 1 = FKPD				1200 VDC = Q0		0.022 μF = 2220			3x9x13 PCM 10 = 3A								
MKP-X2 = MKX2				1250 VDC = R0		0.047 μF = 2470			4x9x13 PCM 10 = 3C								
MKP-X1 R = MKX1				1500 VDC = S0		0.1 μF = 3100			5x11x18 PCM 15 = 4B								
MKP-Y2 = MKY2				1600 VDC = T0		0.22 μF = 3220			6x12.5x18 PCM 15 = 4C								
MP 3-X2 = MPX2				1700 VDC = TA		0.47 μF = 3470			5x14x26.5 PCM 22.5 = 5A								
MP 3-X1 = MPX1				2000 VDC = U0		1 μF = 4100			6x15x26.5 PCM 22.5 = 5B								
MP 3-Y2 = MPY2				2500 VDC = V0		2.2 μF = 4220			9x19x31.5 PCM 27.5 = 6A								
MP 3R-Y2 = MPRY				3000 VDC = W0		4.7 μF = 4470			11x21x31.5 PCM 27.5 = 6B								
MKP 4F = MKPF				4000 VDC = X0		10 μF = 5100			9x19x41.5 PCM 37.5 = 7A								
Snubber MKP = SNMP				6000 VDC = Y0		22 μF = 5220			11x22x41.5 PCM 37.5 = 7B								
Snubber FKP = SNFP				250 VAC = 0V		47 μF = 5470			19x31x56 PCM 48.5 = 8D								
GTO MKP = GTOM				275 VAC = 1V		100 μF = 6100			25x45x57 PCM 52.5 = 9D								
DC-LINK MKP 4 = DCP4				300 VAC = 2V		220 μF = 6220			...								
DC-LINK MKP 6 = DCP6				305 VAC = AV		1000 μF = 7100											
DC-LINK HC = DCHC				350 VAC = BV		1500 μF = 7150											
				440 VAC = 4V		...											
				500 VAC = 5V													
				...													
																</	