



Item no.: 739-152  
 Product description: PCB TERMINAL STRIP 1 SOLDER PIN / POLE 2 POLE PIN  
 SPACING 5.08 MM / 0.2 IN



Packing unit 400 4\*100 pieces

Product group	4 (Printed Circuit)
Weight	2.59 g
Color	orange
No. of connection Points	2
No. of potentials	2
pole count	2
Height	15.8 mm
Height	0.622 in
Width	11.58 mm
Width	0.456 in
Depth	14.3 mm
Depth	0.563 in
Pin spacing from	5.08 mm
Pin spacing from	0.2 in
Pollution degree	2
Measured voltage EN	320 V
Measured shock voltage	4 kV
Current intensity EN	24 A
Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	4 kV
Current intensity EN	24 A

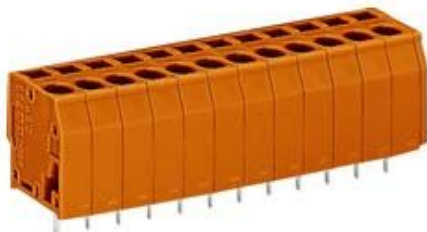

Connection method	CAGE CLAMP® CONNECTION
Cross section [mm <sup>2</sup> ]	0.08 - 2.5 mm <sup>2</sup>
Wiring method	solid
Cross section [mm <sup>2</sup> ]	0.08 - 2.5 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	1.5 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2.5 mm <sup>2</sup>
Cross section [AWG]	28 - 12 AWG
Strip length from	8 mm
Strip length to	9 mm
Material group	I



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
739-152	CSA	154112-1711139	300	12	28-12
739-152	RMR	11130002	250	12	0,5-2,5
739-152	UR	E45172	300/300	12/10	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected